Parameter

Specification				
Product name	Shutter Door Magnetic Contact	Shutter Door Magnetic Contact		
Model number	EB-137A/B	EB-137A/B		
Dimensions	106L * 38W * 10H (mm)	106L * 38W * 10H (mm)		
Connection	Normally open / normally closed	Normally open / normally closed		
Operating distance	60 ± 10 (mm)	60 ± 10 (mm)		
Maximum pressure	≤100VDC	≤100VDC		
Load current	≤500mA	≤500mA		
Working Power	≤10W	≤10W		
Housing Material	A zinc alloy B with bracket	A zinc alloy B with bracket		
Scope	Shutter doors	Shutter doors		
Product weight	254g / 154g	254g / 154g		

linstallations

SMQT

SMQT



Shutter door magnetic contact is intended to provide an alarm signal output garages, warehouses, factories, shops and other complex

environments, typically made of aluminum alloy and zinc alloy, can work in harsh environments, seismic effect is strong, durable, easy to


damage the surface of silver plating to prevent oxidation of the product, with a beautiful effects, line edge trapezoidal design can avoid being

damaged forklifts, stainless steel protection tube can enhance product safety and reliability, the bracket can be adjusted shutter doors on the ground sensing distance iron switch.



Features


SMQT

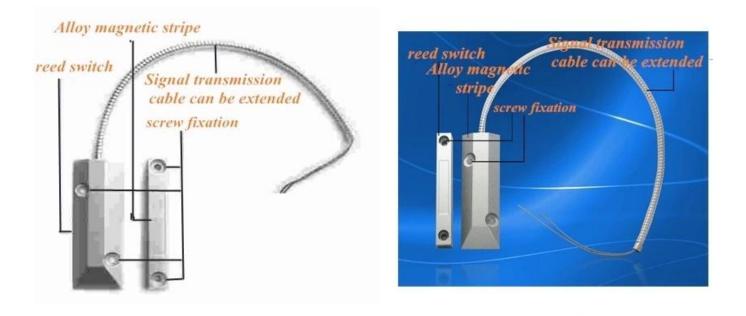

Packing list

SMQT

Packaging List				
Product name	Shutter Door Magnetic Contact			
Model	EA-137A EA-137B			
QTY	50pcs/ CTN			
Packing Specifications	37.5L * 30W * 29.5H (cm)			
Packing weight	14.14kg		15.5kg	

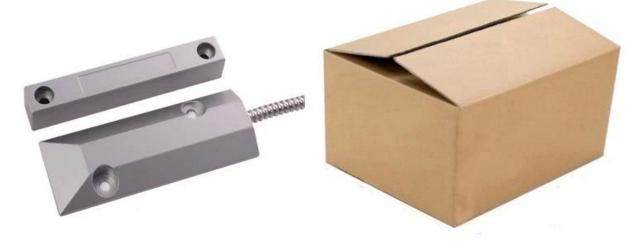



Office

SMQT



Exhibitions

SMQT

