

Specification	
Product name	Shutter Door Magnetic Contact
Model number	EB-137A/B
Dimensions	106L * 38W * 10H (mm)
Connection	Normally open / normally closed
Operating distance	60 ± 10 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	A zinc alloy B with bracket
Scope	Shutter doors
Product weight	254g / 154g



137A(Alloy-zn)

137B(Alloy-Al)

Shutter door magnetic contact is intended to provide an alarm signal output garages, warehouses, factories, shops and other complex environments, typically made of aluminum alloy and zinc alloy, can work in harsh environments, seismic effect is strong, durable, easy to damage the surface of silver plating to prevent oxidation of the product, with a beautiful effects, line edge trapezoidal design can avoid being damaged forklifts, stainless steel protection tube can enhance product safety and reliability, the bracket can be adjusted shutter doors on the ground sensing distance iron switch.

● Dimesion Picture

SMQT®




● Installations

SMQT®



● Features

SMQT®

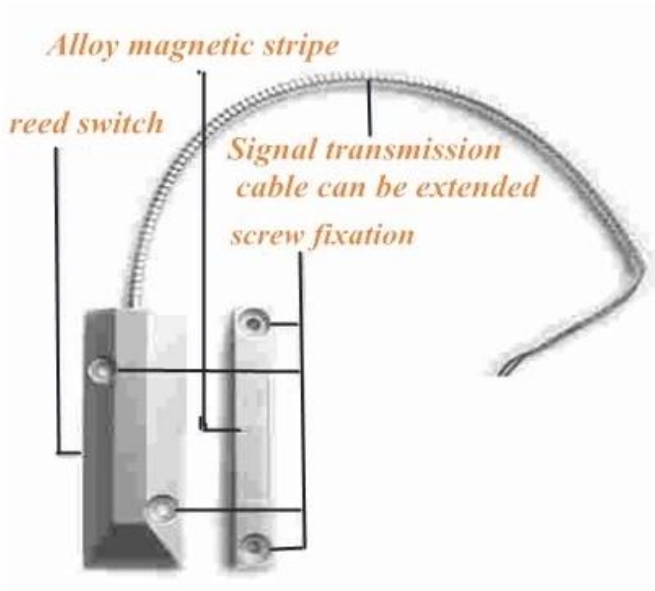

● Packing list

SMQT

Packaging List		
Product name	Shutter Door Magnetic Contact	
Model	EA-137A	EA-137B
QTY	50pcs/ CTN	
Packing Specifications	37.5L * 30W * 29.5H (cm)	
Packing weight	14.14kg	15.5kg





● Office

SMQT®



● Exhibitions

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....