

Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed


Twisted-pair cables as transmission medium

With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT®

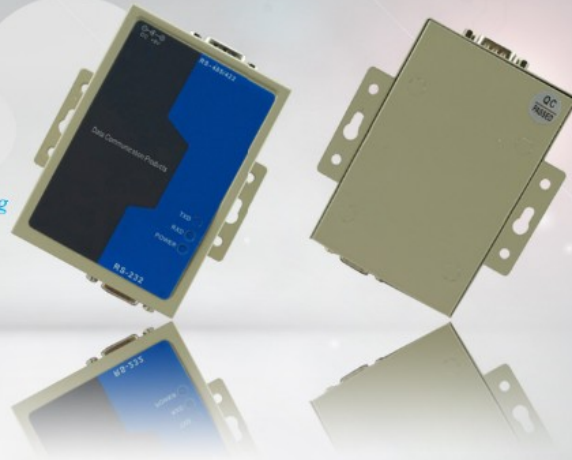

Product name	Long distance PC rs485 converter RS232,1200M converter
Model	EA-05
Dimension	90L * 65W * 25.5H (mm)
External power supply	DC 9V
Serial feature	Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard
Electrical Interface	RS-232C interface DB9 female connector port, RS-422 / RS-485 Interface DB9 female connector and is equipped with six terminals
Signal indication	Three signal lights TXD RXD POWER
Transmission medium	Shielded twisted pair wire
Transmission rate	300-115.2KBPS
Protection class	RS-232 interface $\pm 15\text{KVESD}$ protection, RS-422 / RS-485 interface to 600W per line lightning surge protection
Isolation	3500VRMS
Color	grey
Usage	Access control system
Relative Humidity	5%~95%
Environment temprature	0 °C ~ 50 °C
Net weight	0.62kg

What Features of our rs485 converter?



EA-05

Converter RS232 to RS485

**Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard**

Electrical Interface:

**RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector**

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%

Environment temprature: 0 °C ~ 50 °C


Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

IN-KIND SHOOTING



APPLICATION

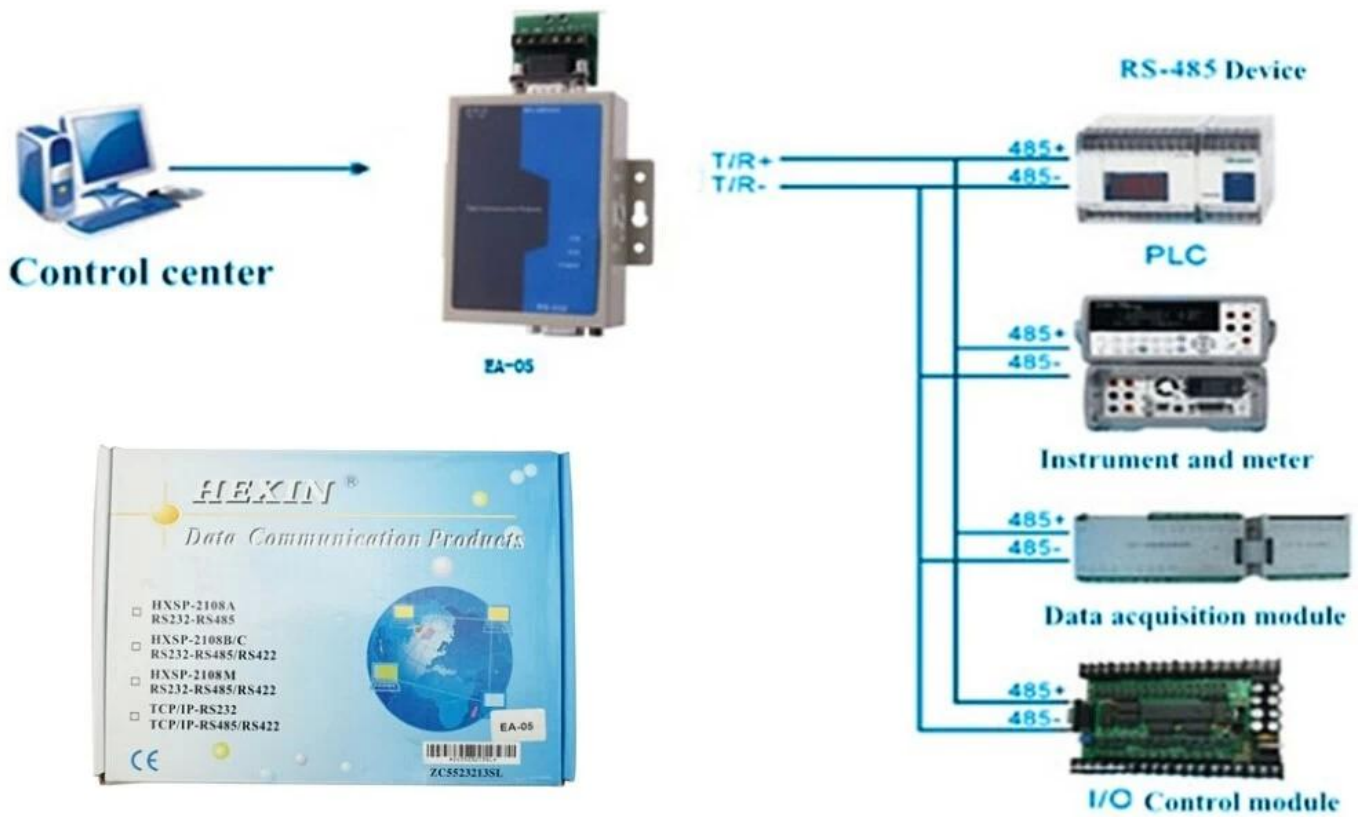

SHOW CASE



OFFICE SHOW



CUSTOMER



EXHIBITION

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair




2015 Shenzhen Fair

CERTIFICATE



HOW TO COOPERATION

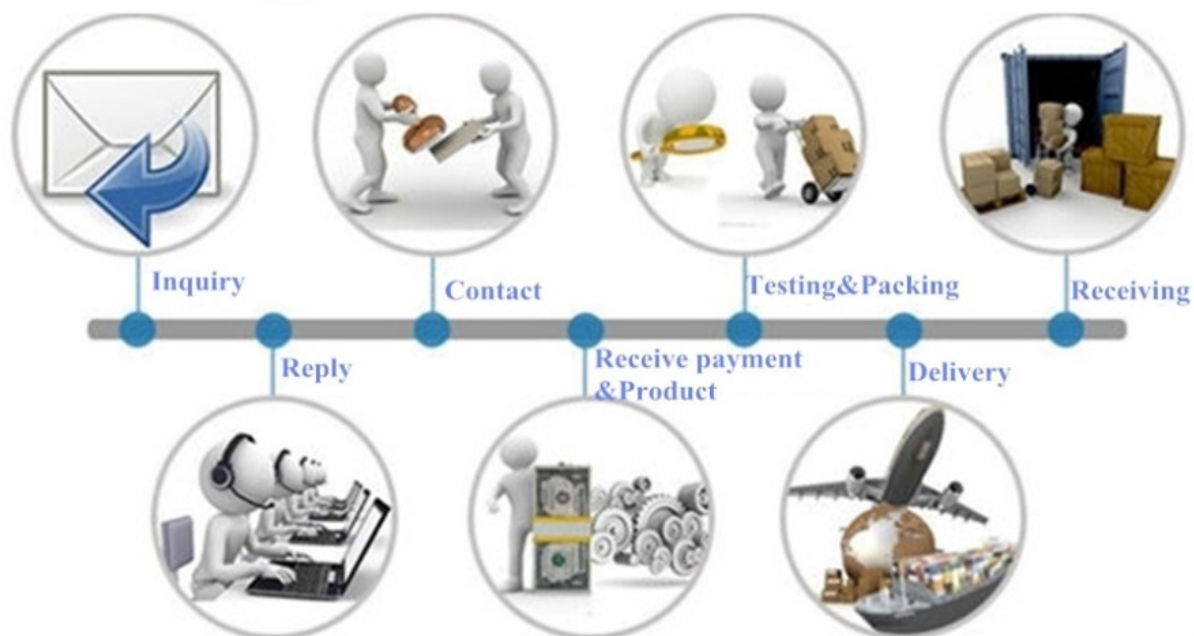

Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer

FAQ

Q:Can I have a sample order?

A:Yes, we are willing to offer trial sample order to you for quality test. Mixed samples are acceptable.

Q: What is the lead time?

A: Sample needs 1-3 working days, mass production time needs 10-15 working days for order less than 5000pcs.

Q: Do you have any MOQ limit?

A: EXW MOQ is 100pcs under blank box.

Q: How do you ship the goods and how long does it take arrive?

A: The sample will be sent to you by optional shipping service (couriers, air, and sea). The delivery time depends on the shipping service.

Q: How will we proceed the order if I have logo to print?

A: Firstly, we will prepare artwork for visual confirmation. If the color and position are right, we would make sampling firstly from silk print factory and take picture for your second confirmation before mass production.

Q: Does alarm panel work with any sensor?

A: The alarm panel can work with all dry contact wired detectors and wireless detector, including almost all of the wireless sensors from Chinese manufacturers. The wireless encode and decode is EV1527 or our wireless sensors.