

Wired embedded magnetic contact

NC/NO mode optional

35±5(mm) gap distance


Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

SMQT®

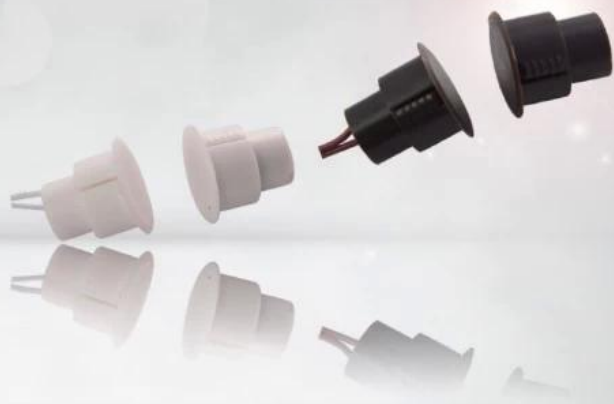

• Parameter

SMQT®

Specification	
Product name	Wired Magnetic Door Contact Sensor
Model number	EB-136
Dimensions	Φ19 * 25 (mm)
Connection	Normally open / normally closed
Operating distance	35 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Iron door or window
product weight	24g

• Introduction

SMQT®

The electronic door contact switch is the electronic door sensor for door alarm security system and door access control system.

PRODUCT PICTURE



PRODUCT FEATURE



EB-136



Dimension: $\phi 19 \times 25$ (mm)

Material: ABS

Max Gap: ≤ 40 mm

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.



• *Packaging & shipping*

SMQT[®]



• *Office show*

SMQT[®]



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

