

# Wired embedded magnetic contact

*NC/NO mode optional*

*35±5(mm) gap distance*


*Max voltage≤100VDC, Max current≤500mA*

*Suitable for metal door or window*

*White/Brown color optional*

*24g weight*

**SMQT®**

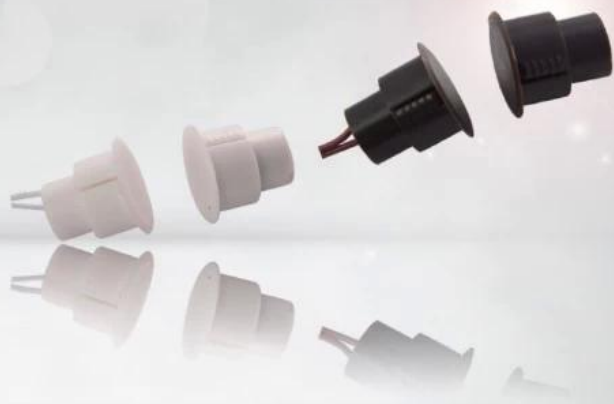

## • Parameter

**SMQT®**

Specification	
Product name	Wired Magnetic Door Contact Sensor
Model number	EB-136
Dimensions	Φ19 * 25 (mm)
Connection	Normally open / normally closed
Operating distance	35 ± 5 (mm)
Maximum pressure	≤100VDC
Load current	≤500mA
Working Power	≤10W
Housing Material	ABS fireproof material
Shape color	Brown / White
Scope	Iron door or window
product weight	24g

## • Introduction

**SMQT®**

The electronic door contact switch is the electronic door sensor for door alarm security system and door access control system.

# PRODUCT PICTURE





# PRODUCT FEATURE



EB-136



Dimension:  $\phi 19 \times 25$ (mm)

Material: ABS

Max Gap:  $\leq 40$ mm

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

## Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



## Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



## Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.





## • *Packaging & shipping*

SMQT<sup>®</sup>



## • *Office show*

SMQT<sup>®</sup>



## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

