

wireless Solar Siren

Fireproof ABS housing, 105 sound pressure,
AC 110V-240V,USB 5V ,solar Power supply,
color(red/blue optional).



SMQT

• *Parameter*


SMQT

Backup Power	3.7V 1800mAh 18650 type rechargeable battery a 9V 6F22 battery 1
Solar panel output current	Under 2000LUX lighting conditions $\geq 4\text{mA}$
Maximum volume	110db
Maximum alarm current	$< 500\text{mA}$
Standby Current	$< 1\text{mA}$
Battery standby time	< 45 days (no light conditions)
Radio Frequency	315MHZ
Conditions of Use	Temperature $-10\text{ }^{\circ}\text{C} \sim + 55\text{ }^{\circ}\text{C}$ Relative humidity $\leq 80\%$ (non-condensing)
Housing Material	PC + ABS + anti-UV
size	309 * 230 * 80 (mm)

• *Introduction*

SMQT

PRODUCT PICTURE

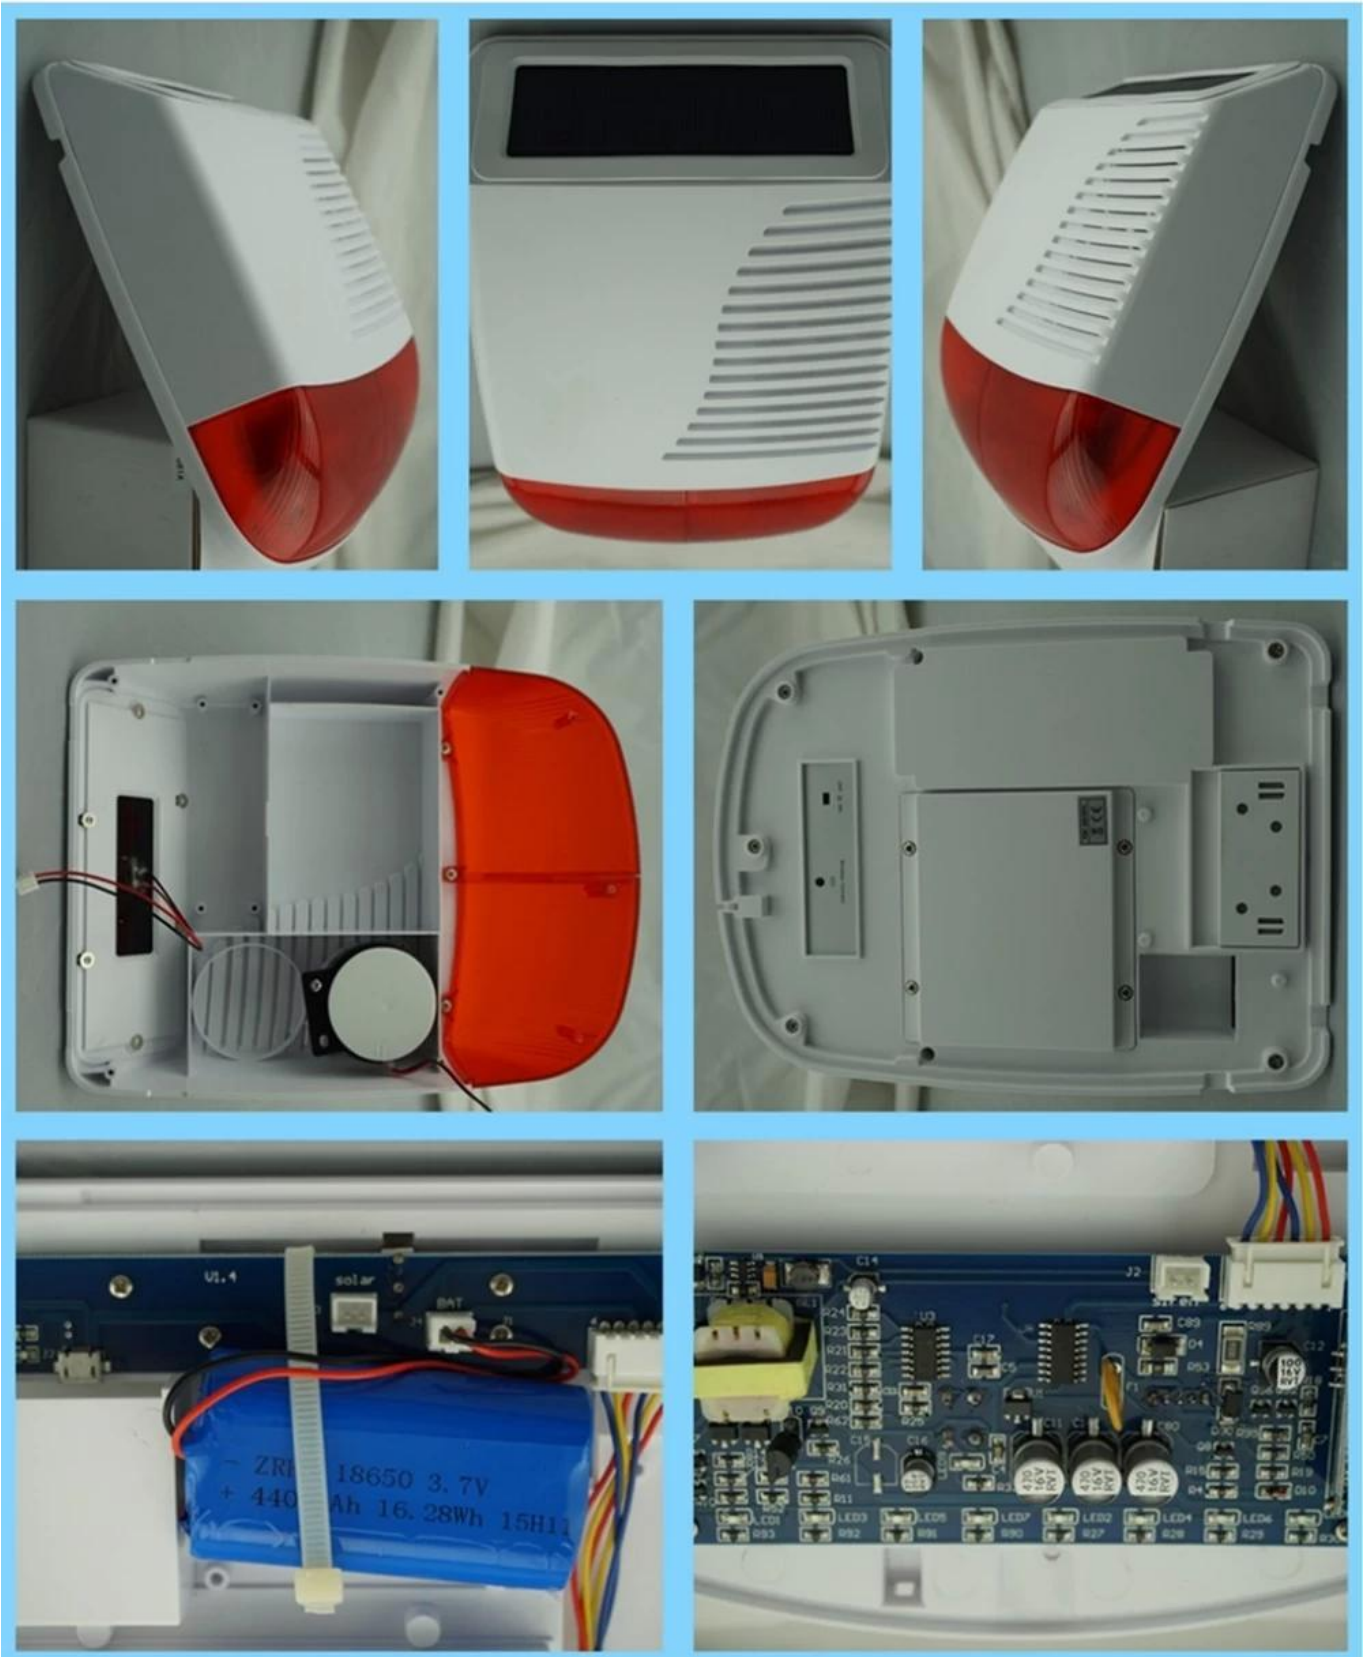

Electro mechanical electric motor siren like the electronic strobe

solar siren use with the alarm system.

• *Dimension*

SMQT



• *Feature*

SMQT

PRODUCT FEATURE



EB-168W

1. Waterproof Shell →

2. Intelligent Control →

*3. Lithium batteries,
solar charger* →

4. Tamper alarm →

Your hearing, you kown, no worry!



Solar power



Wireless outdoor solar strobe light siren

Wireless connection



Apply for Wireless home alarm system

• Packaging & shipping

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair