

# Wireless door sensor

*Fireproof ABS shell*

*DC 12V power supply*

*Wireless frequency 315Mhz/433Mhz optional*

*Wireless signal transmission distance max 100m*



**SMQT®**

## • Parameter

**SMQT®**



Parameter	
Product name	Wireless door alarm sensor for home alarm
Model	EB-130
Dimension	71×36×15(mm) 63×14×14(mm)
Gap	40 ±5mm
Operating voltage	12V Alkaline battery
Battery work time	≤1years
Wireless frequency	315Mhz/433Mhz(optional)
Transmitting distance	≤100m(in the open area)
Shell color	White
Net weight	0.035kg

## • In-kind shooting

**SMQT®**





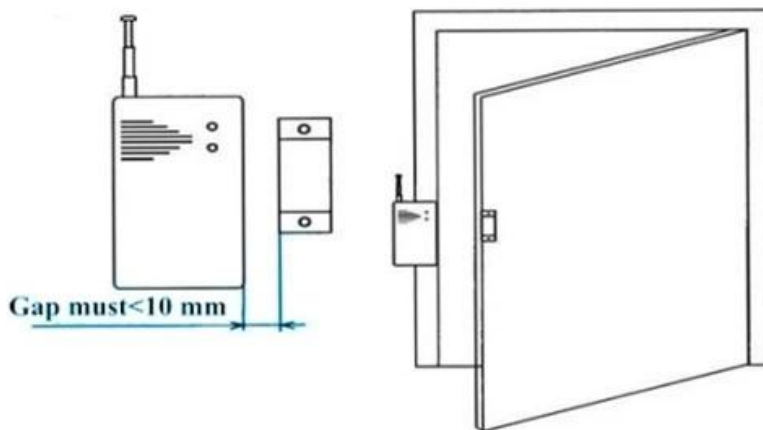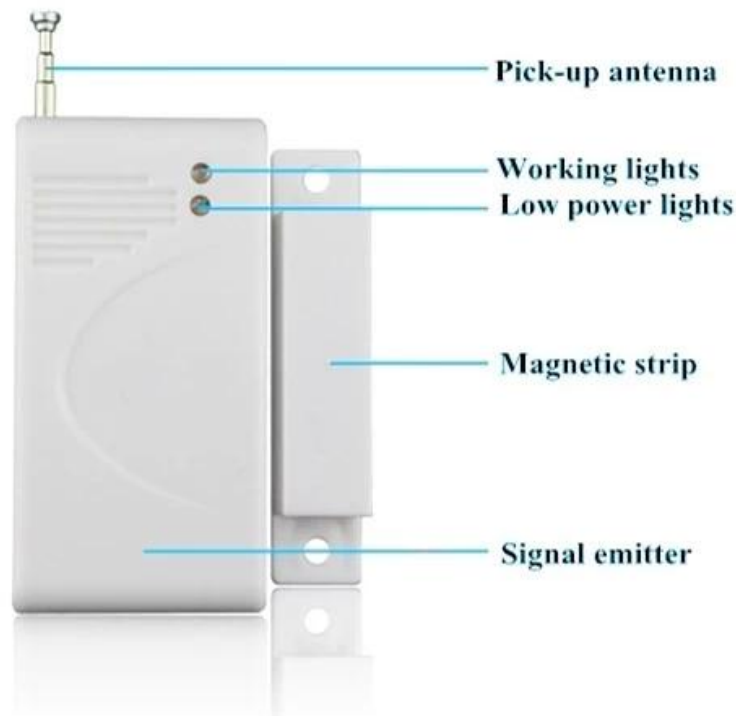

**Function:** To detect the door, window, drawer, ambry is illegally open or move.

**Features:** Triggered under the armed state, there will be alarm signal to send to alarm host.

**Installation:** installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



**Installation Instruction**

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

## • Packaging & shipping

SMQT®

Packaging list	
Product name	EB-130 Wireless door alarm sensor for home alarm
Qty	200 pcs per carton
Carton size	47*37*29(cm)
Weight	10kg



## • Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....