

• Parameter

SMQT

Specification		
Product number	EA-23A	EA-23B
Standard Structure	Stainless steel panels, metal buttons	Stainless steel panels, metal buttons
Electrical Performance	Current maximum durability 3A36VDC	Current maximum durability 3A36VDC
Contact output	NC / COM contacts	NO / NC / COM contacts
Durability test	500,000 times aging tested	500,000 times aging tested
For Type	Applicable hollow frames	Applicable hollow frames
Panel Processing	Brushed stainless steel panel	Brushed stainless steel panel

Introduction

SMQT

The access control door exit button is the stainless push door release button switch used with the access control system.



• Feature smor



EA-20A



EA-20B

Superior Design NO.1

Stainless steel wire drawing panel, high temperature resistant shock, do not fade.





Components NO.2


PC rubber seal production, full seal lock core.

Installation

SMQT



Switch Power Supply

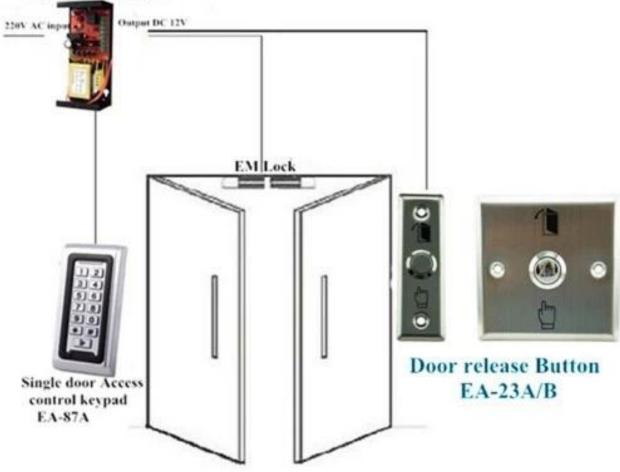



Office show

SMQT













• Exhibition smot

