

## Wired infrared 2 beams perimeter detector



no intruding  
no across

### • Parameter

SMQT®

Nome do Produto	Outdoor sensor de feixe à prova de água
número do modelo	ABT
Tensão operacional	13,8 ~ 24VDC 11 28VAC ~
corrente de operação	40-65mA
velocidade indicação	50 ~ 700m / seg
saída anti-demolição	NC
temperatura ambiente	-20 °C ~ + 50 °C
saída de alarme	NO / NC
ajuste de nível	180 ° ± 90 °
ajuste Vertical	± 10 °
Cor	Preto
Material	resina de PC

### • Introduction

SMQT®

# PRODUCT PICTURE




O detector de movimento barreira feixe de infravermelho é usado em cima do

muro como o infravermelho trabalho detector cerca com o sistema de alarme.

## • Dimension

SMQT<sup>®</sup>

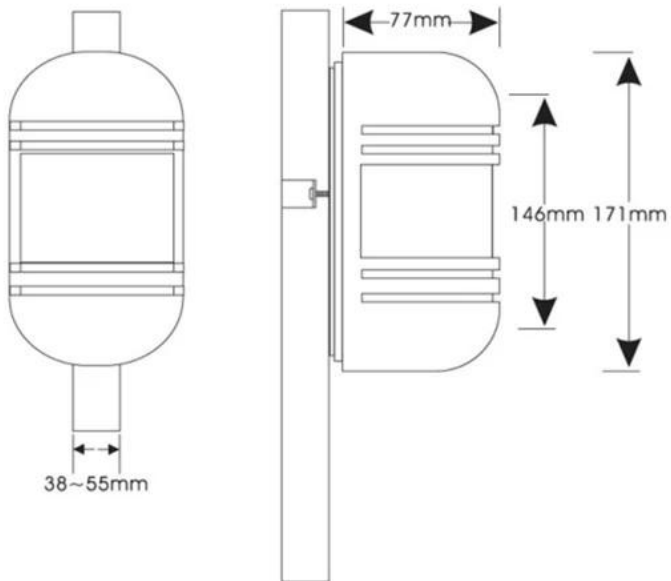

## • Feature

SMQT<sup>®</sup>

# PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity(AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

---

• *Packaging & shipping*

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair