

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT



• Parameter

SMQT



dimensões	64L * 19W * 13H (mm)
Conexão	Normalmente aberto / normalmente fechado
Distância de funcionamento	20 ± 5 (mm)
Pressão máxima	≤ 100VDC
Corrente de carga	≤500mA
Potência de trabalho	≤ 10W
Material da Caixa	ABS forma de material à prova de fogo
Cor	Castanho / Branco
Escopo	Porta ou janela não ferrosa
Peso do Produto	24g

• Introduction

SMQT

O interruptor de contato de porta magnético é o sensor de porta com fio e sensor de janela para controle de acesso de porta e sistema de alarme.

PRODUCT PICTURE

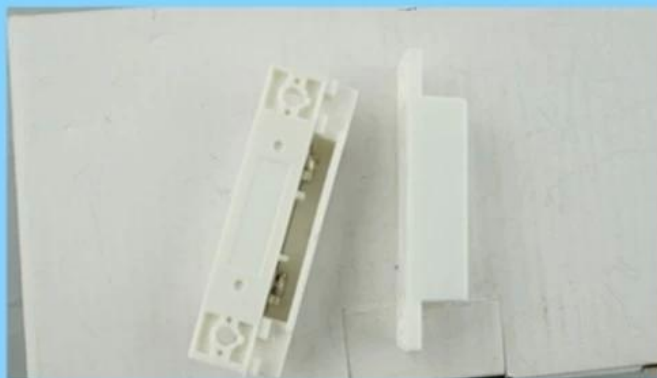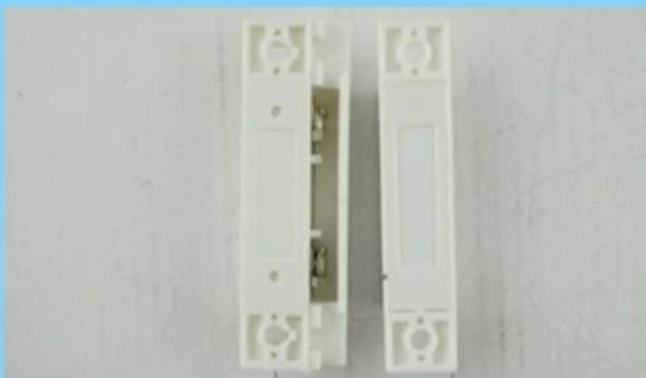

PRODUCT FEATURE



White



Brown

2 Color optional

Dimension: 64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage ≤ 110VDC, MAX current ≤ 500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight: 24g

2 years quality warranty, welcome OEM



● Office show

SMQT®



● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair