Parameter

SMQT

energia de reserva	3.7V 1800mAh 18650 tipo de bateria recarregável um 9V 6F22 1
corrente de saída do painel solar	Sob condições de iluminação 2000LUX ≥4mA
volume máximo	110db
Máxima corrente de alarme	& Lt; 500mA
corrente à espera	& Lt; 1 mA
Bateria tempo de espera	& Lt; 45 dias (sem condições de luz)
Frequência de rádio	315MHZ
Condições de Uso	Temperatura -10 ℃ ~ + 55 ℃ Umidade relativa ≤80% (sem condensação)
material da caixa	PC + ABS + anti-UV
tamanho	309 * 230 * 80 (mm)

Introduction

SMQT

PRODUCT PICTURE

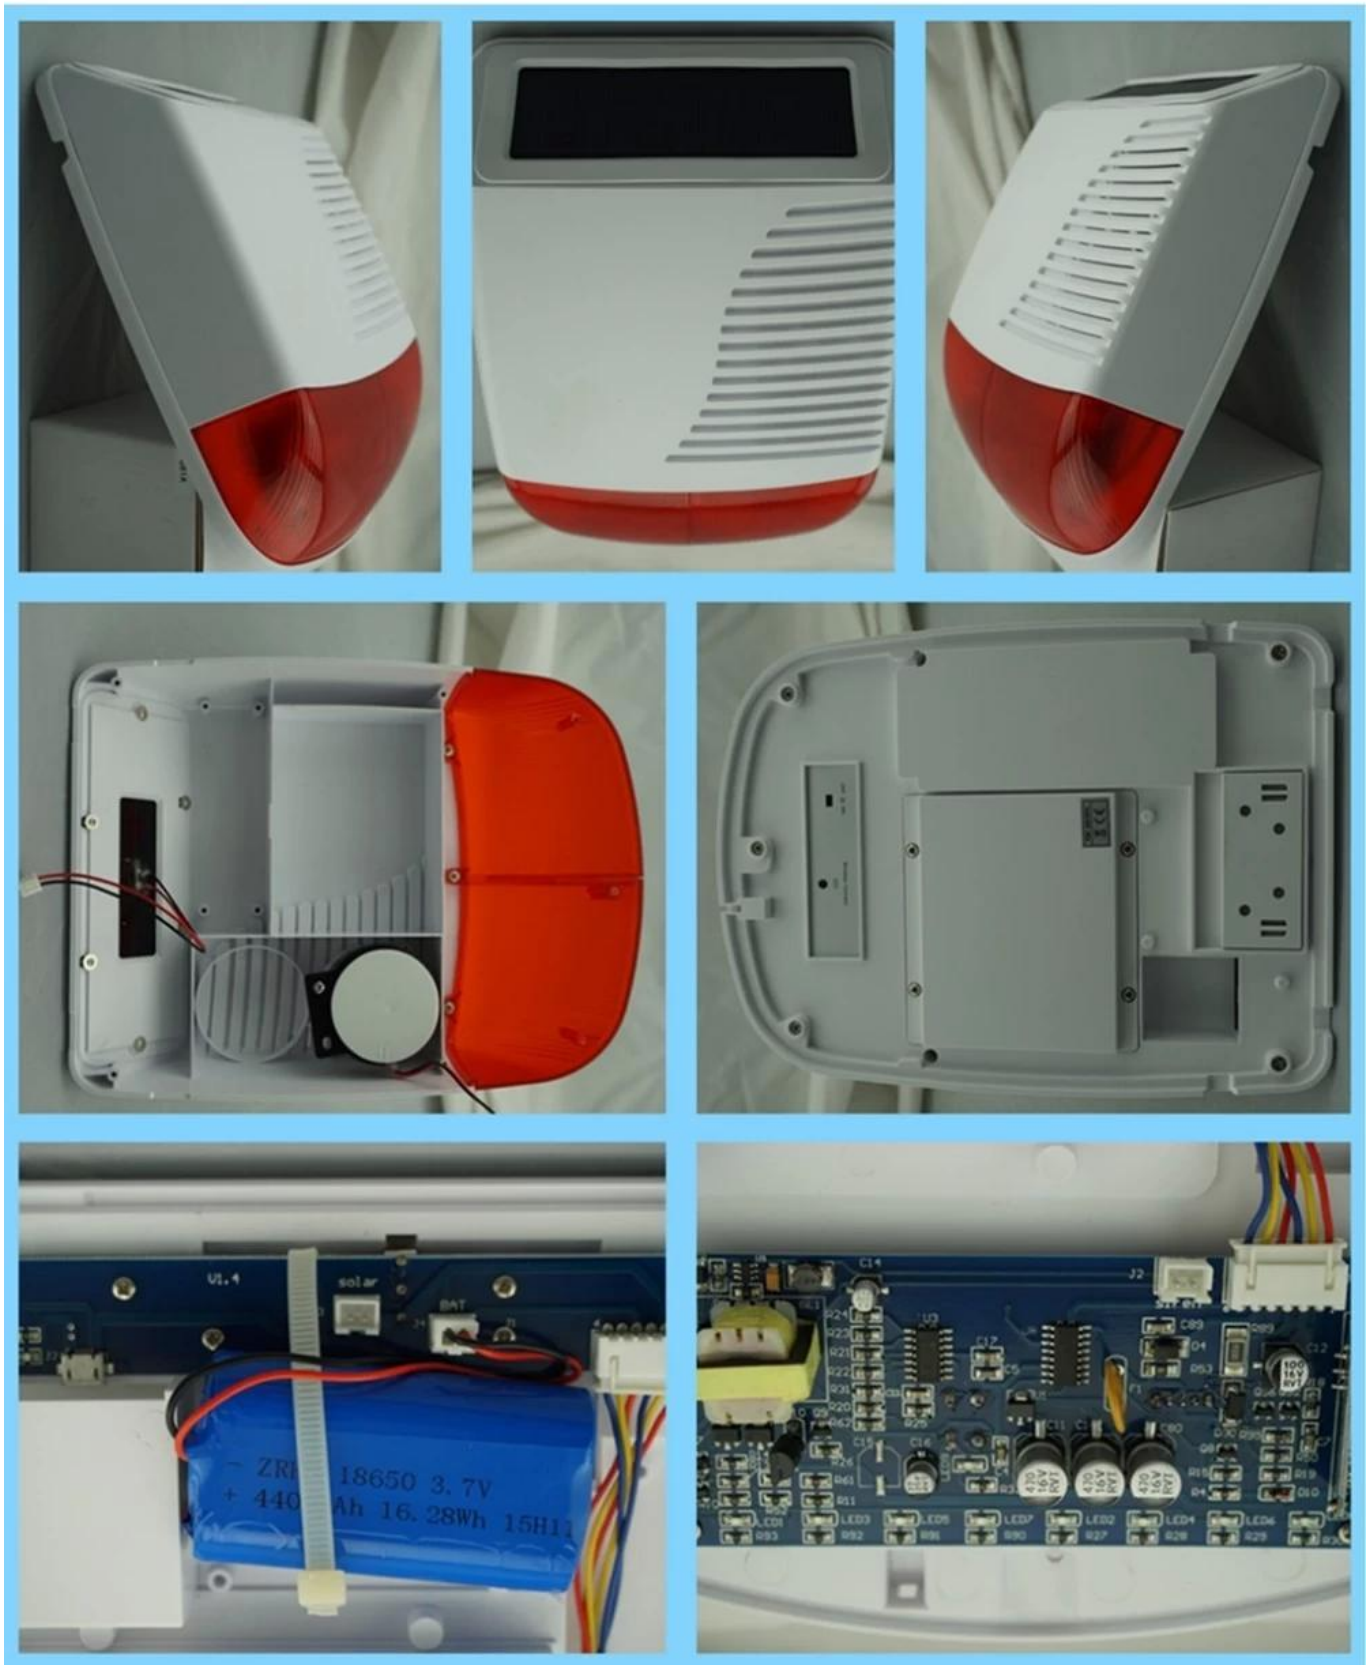

Electro mecânicos sirene de motor elétrico como a sirene solares

estroboscópicas electrónico usar com o sistema de alarme.

•Dimension

SMQT

•Feature

SMQT

PRODUCT FEATURE

EB-168W

1.Waterproof Shell

2.Intelligent Control

3.Lithium batteries, solar charger

4.Tamper alarm

Your hearing,you kown, no worry!

Solar power

Wireless outdoor solar strobe light siren

Wireless connection

Apply for Wireless home alarm system

•Packaging & shipping

SMQT

•Office show

SMQT

•Exhibition

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair