

Wired infrared 2 beams perimeter detector



no intruding
no across

• Parameter

SMQT®

Наименование товара	Outdoor водонепроницаемый датчик луча
Номер модели	АВТ
Рабочее напряжение	13.8 ~ 24VDC 11 ~ 28VAC
Рабочий ток	40-65mA
скорость Индикация	50 ~ 700м / сек
Выход Анти-снос	Северная Каролина
температура окружающего воздуха	-20 °C ~ + 50 °C
выход сигнала тревоги	НЕТ / NC
регулировка уровня	180 ° ± 90 °
Vertical регулировка	± 10 °
цвет	черный
материал	РС смолы

• Introduction

SMQT®

PRODUCT PICTURE




Инфракрасный луч барьера детектор движения используется на заборе,

как инфракрасный работы детектора забор с системой сигнализации.

• Dimension

SMQT[®]

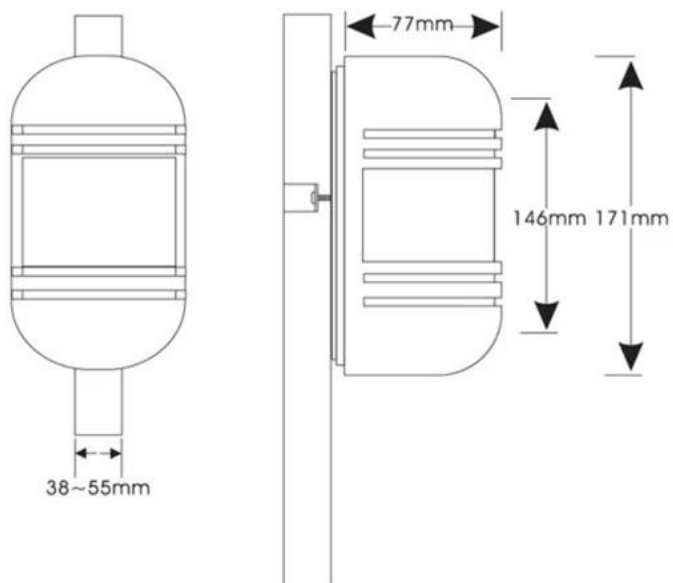

• Feature

SMQT[®]

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity(AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

• *Packaging & shipping*

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....