Сигаретный дымовой извещатель

параметр	
Имя:	Сигаретный дымовой извещатель
Размер:	Ø106mm * 59мм
Рабочее напряжение:	Аккумуляторная батарея 9V 6F22
Резервный ток:	≤15uA
Тревожный ток:	≤56mA
Срок службы батареи:	Менее 1 года
Индикатор мощности:	рсветодиодный индикатор
Индикатор тревоги:	рсветодиодная вспышка мигает
Звуковое давление:	85дБ / м
Рабочая температура:	-10 ° C ~ 50 ° C
Рабочая влажность:	≤95% относительной влажности
Передающее расстояние:	& lt; 100 м (открытая область)
Выполнить критерий:	EN14604
Область обнаружения:	40 квадратных метров при монтажной высоте от 6 до 12 метров. 20 квадратных метров при монтажной высоте в пределах 6 метров.

Каковы особенности нашего сигаретного дымового извещателя?

9V 6F22 battery,wireless output 315MHz or433MHz

Sound&flash alarm wireless fire alarm smoke detector

Dust-proof,moth-proof and anti-Interference function

Suitable for detecting the smoke in house,shop,hotel...

2 years quanlity,welcome to do OEM and ODM

ВНУТРЕННЯЯ СЪЕМКА

ЗАЯВЛЕНИЕ

Standalone Gas detector

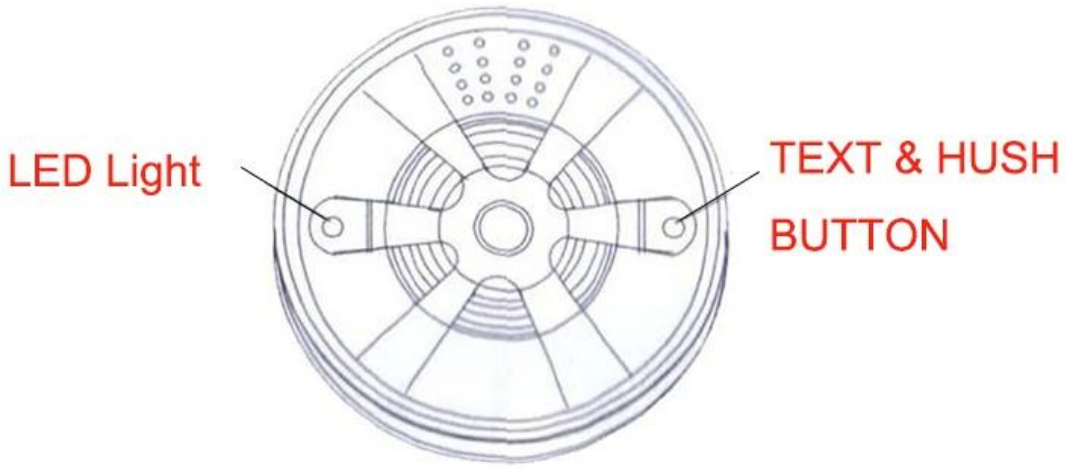

The detector adopts the reflection principle of smoke particles that can reflect infrared light The main circuit includes a MCU processing Section,an infrared-emitting portion and an infrared receiving portion.

Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

КАК О ДРУГОЙ ВЫБОР?