

Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

SMQT



• Parameter

SMQT



Габаритные размеры	64L * 19W * 13H (мм)
подключение	Нормально открытый / нормально закрытый
Рабочее расстояние	20 ± 5 (мм)
максимальное давление	≤100VDC
Ток нагрузки	≤500mA
Рабочая мощность	≤10W
Материал корпуса	ABS огнестойкий форму материала
Цвет	Коричневый / Белый
Объем	Цветных двери или окна
Вес изделия	24g

• Introduction

SMQT

Контактный выключатель двери магнитный является проводной датчик двери и датчик окна для контроля доступа двери и системы сигнализации.

PRODUCT PICTURE

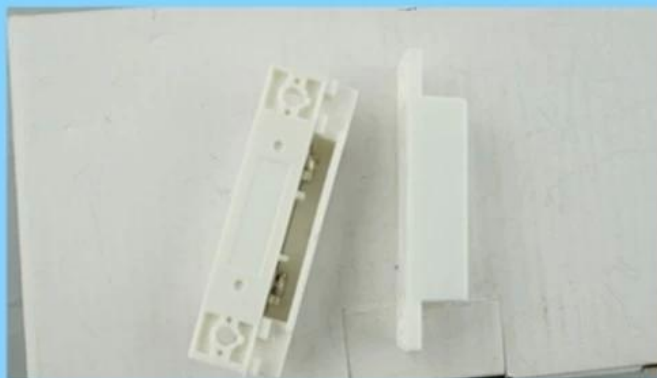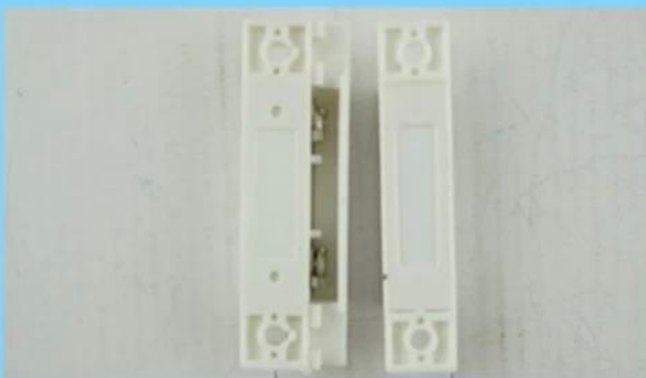

PRODUCT FEATURE



White



Brown

2 Color optional

Dimension:64×19×13(mm)

NO/NC mode optional

20±5(mm) gap

MAX voltage≤110VDC,MAX current≤500mA

Fireproof ABS material housing

Suitable for wooden door or window

Brown/ White color optional

Weight:24g

2 years quality warranty, welcoem OEM



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair