

Converter RS232 to RS485

Compatible with EIA/TIA RS-232, RS-485 standard

Interface: RS232 interface DB9 (holes)

RS485 interface DB9 (pin)


Transmission medium: normal cables

twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment: -10 to 80 °C

Working humidity: 5% to 95%

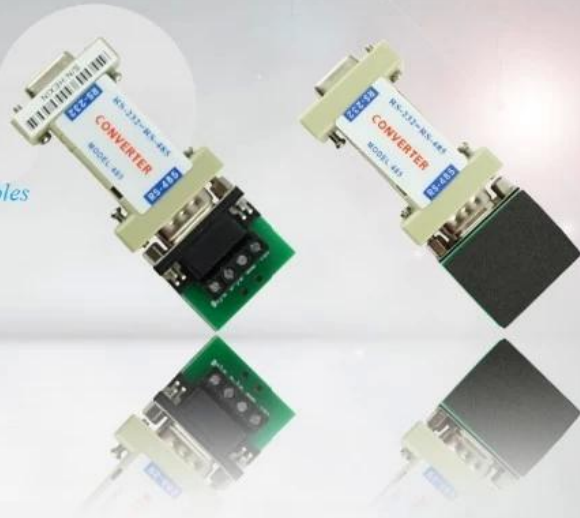

Parameter



EA-01	
Model	EA-01
Dimensions	90 × 33 × 12 (mm)
Compliance	Complies with EIA / TIA RS-232C, RS-485 standards
Interface	RS232 DB9 (holes) / RS485 DB9 (pin) / RS-232C (S-232C)
Mode	Asynchronous
Speed	300-115200BPS
Terminal	5 (RS-232 Terminal) 1,200 (RS-485 Terminal)
Signal	RS-232: TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND RS-485: + Data-, GND
Weight	0.106kg
Humidity	5% ~ 95%
Temperature	-10 °C ~ 85 °C

Introduction



RS232 RS485



Converter RS232 to RS485

Dimension:90×33×12(mm)

*Interface compatible with EIA /
TIA RS-232C, RS-485 standard*

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

*RS-232: TXD, RXD, RTS, CTS, DTR, DSR,
DCD, GND*

RS-485: Date +, Date-, GND, 9V+

Relative Humidity:5%~95%

Environment temprature:-10 °C~85 °C

Welcome OEM, 2 years quality warranty

• Installation

SMQT®

Switch Power Supply



Door release button



Standalone controller

Converter
(RS232 to RS485)
EA-01



PC

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair