


Converter RS232 to RS485

- Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA
- RS-232 interface, DB9(holes)
- RS-422/RS-485 interface,DB9(pin) with 6 terminals
- 300-115.2kbps transmission speed
- Twisted-pair cables as transmission medium
- With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.
- 3500VRMS isolation
- 500VDC isolation voltage



Parameter

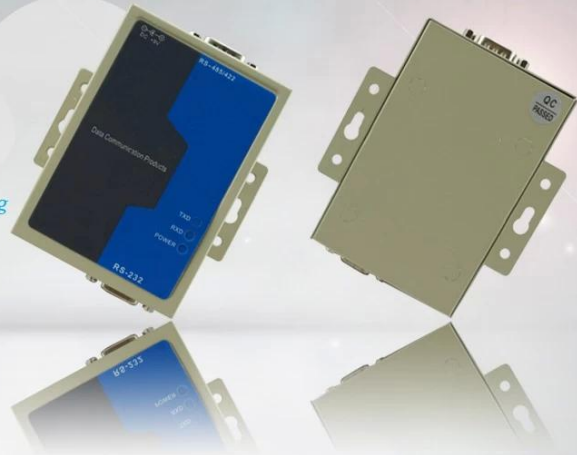

Model	EA-05
Dimensions	90L ***** 65W 25.5H (mm)
Power Supply	9V
Interface	RS-232C DB9 (pin) / RS-422 / RS-485 DB9 (pin)
Transmission Rate	300-115.2KBPS
Protection	RS-232 $\pm 15\text{KVESD}$, RS-422 / RS-485 600W
Isolation	3500VRMS
Temperature	0 °C ~ 50 °C
Weight	0.62kg

In-kind shooting





• Feature

SMQT®

EA-05



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

Application

SMQT

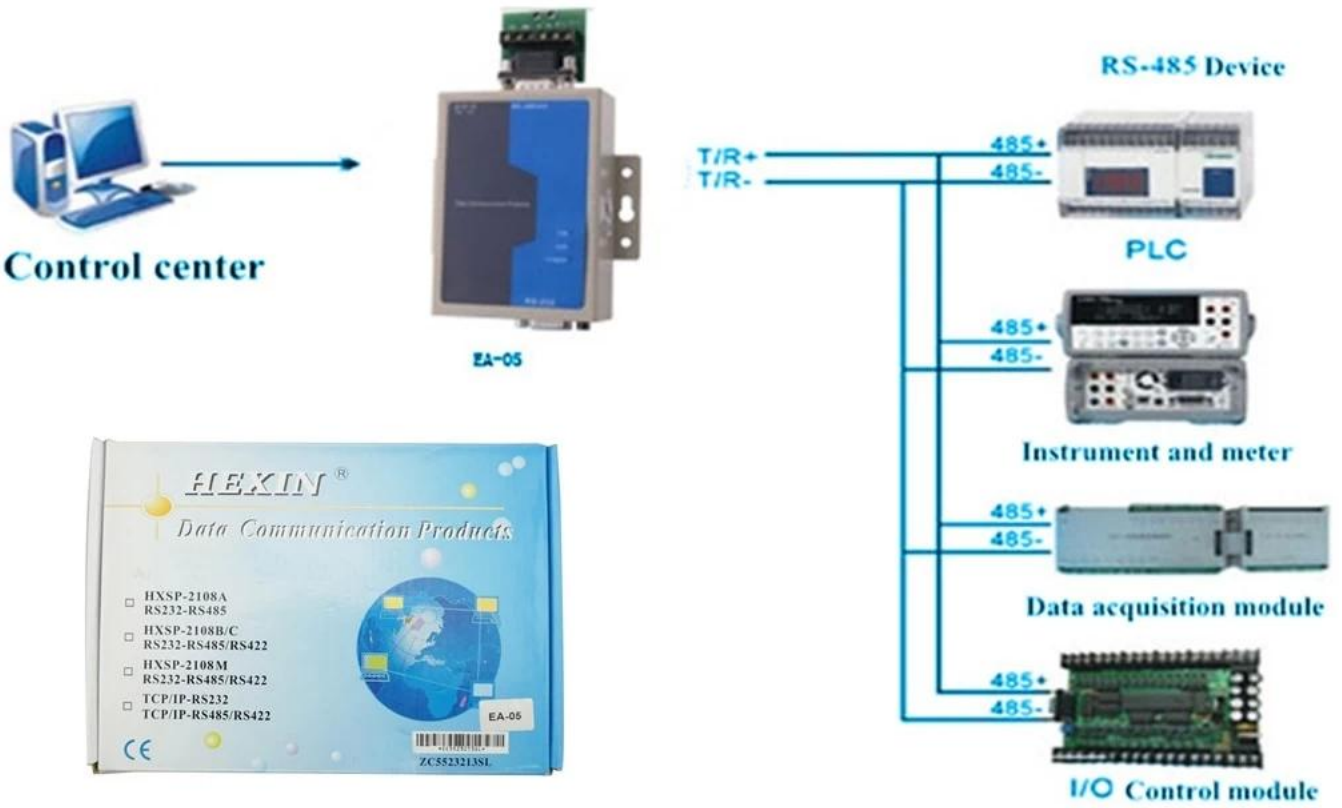

Packaging & shipping

SMQT

□□□□□□□□□□□□□□□□	
□□□□□□□□□□□□	□□□□□□□□□□ RS232 □□□□ RS485 EA-05
□□□□□	20 □□□□□□□□□□□□
□□□□□□□□	43 * 30 * 37 (□□.)
□□□□□□□	14kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....