



OLED display
White/Black color optional
Accept Logo print

EA-92DK

	EA-92DK
	96 × 96× 22 (mm)
	12V ± 3VDC
	<1W
	ID 125KHz
	60mm
	150m
	WG26 / WG34
	1bit / MS
	4bit / 8bit
	/ ()
	/

operating temperature	-30 °C ~ 65 °C
weight	0.2kg

1. The device adopts an areaceous OLED display; the display is directly (derctly) visible.



2. The device is designed with a Wiegand 26/34 interface for easy integration with existing systems.

3. The device is designed with a Wiegand 26/34 interface for easy integration with existing systems.


4. The device is designed with a Wiegand 26/34 interface for easy integration with existing systems.

5. The device is designed with a Wiegand 26/34 interface for easy integration with existing systems.

Size

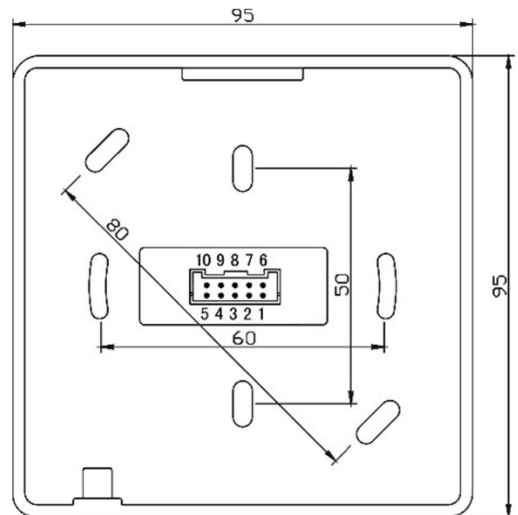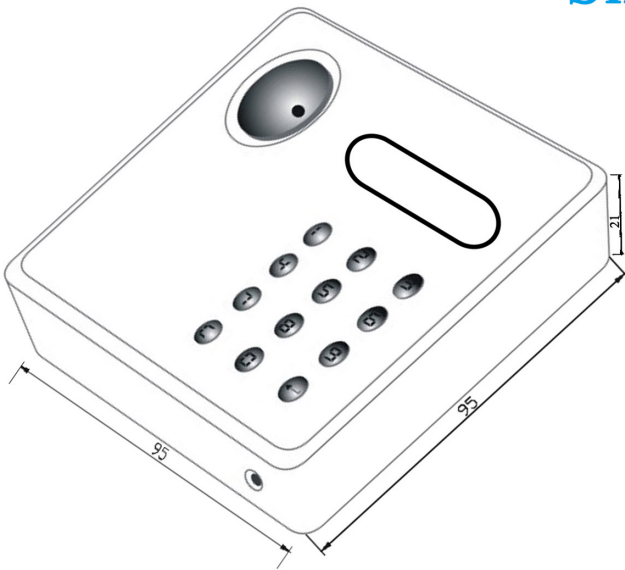

Wire port introduction

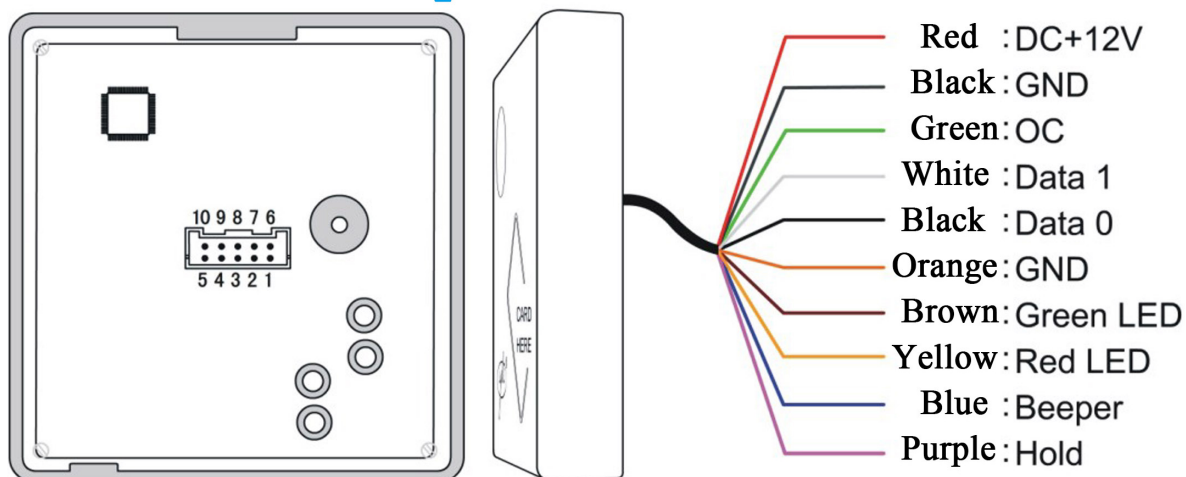

NO	Color	Function	Description
1	Red	12V+	DC Power 12V
2	Black	GND	DC Power 0V
3	Green	OC OUT**	OC Out to output doorbell signal or anti-tamper signal
4	White	DATA1	Wiegand DATA1 Output
5	Black	DATA0	Wiegand DATA0 Output
6	Orange	GND	Signal Grounding
7	Brown	Green LED*	Grounding to display 1 st message and green LED lights up
8	Yellow	Red LED*	Grounding to display 2 nd message and red LED lights up
9	Blue	Beeper	Beeper controller, grounding to work
10	Purple	Hold	Card reading controller, grounding to stop therefore reading

