

● Parameter

SMQT®

□□□□	
□□□□□□□□□□□□	□□□□□□ PIR □□□□□□□□□□
□□□	EB-188
□□□□	110 × 70 × 40 (mm)
□□□□□□□□□□□□□□□□	3V DC (2AA □□□□□□□□□□)
□□□□□□□□□□□□	& lt; = 25uA
□□□□□□□□□□□□	& lt; = 15mA
□□□□□□□□□□□□□□□□	9M
□□□□□□□□□□□□	15 °
□□□□□□□□□□□□□□□□	315MHz / 433MHz (2262 □□□□□□□□ □□□□) (□□□□□□□□□□□□)
□□□□□□□□□□□□□□□□	200 □□□□ (□□□□□□□□□□□□□□)
□□□□□□□□□□□□□□□□	2.2m
□□□□□□□□□□□□□□	□□□□□□□□
□□	□□□□□□□□□□□□
□□□□□□	□□□□□□□□□□□□□□□□
□□□□□□	□□□□□□□□□□□□□□□□ ABS □□□□
□□□□□□□□□□□□	0.184kg

● Parameter


SMQT®



● Introduction

SMQT®

PRODUCT PROFILE

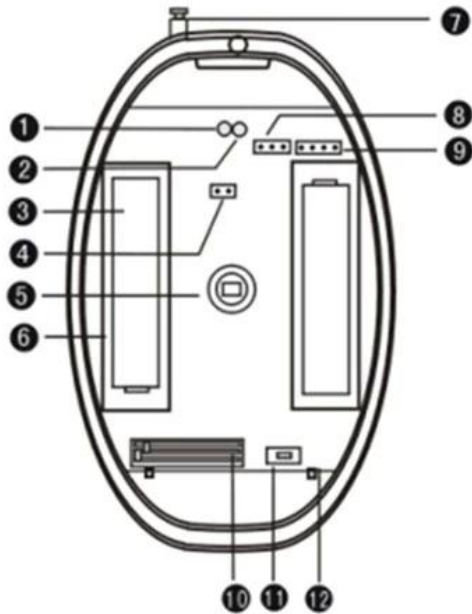

- ① LED indicator
- ② Low power indicator
- ③ Battery
- ④ LED jumper
- ⑤ IR sensor
- ⑥ Battery box
- ⑦ Antenna
- ⑧ DELAY Jumper
- ⑨ RANGE Jumper
- ⑩ Code Jumper
- ⑪ Test Button
- ⑫ PCB



● Features

SMOT



- 1.Adjustable
- 2.Auto
- 3.
- 4.Adjustable □□□□□□□□□□□□□□□□□□□□
- 5.Anti-RFI & amp; □□□□□□□□□□□□□□□□□□□□ I-□□□□□□□□□□
- 6.Send □□□□ RF
- 7.Low
- 8.SMT Design □□□□□□□□□□□□□□□□□□□□



Curtain PIR sensor

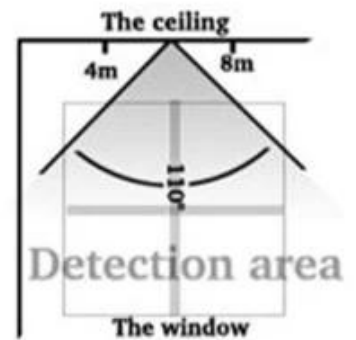

DETECTING AREA VIEW

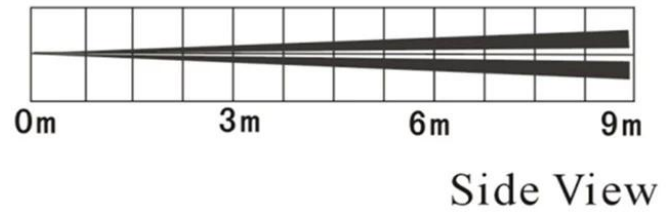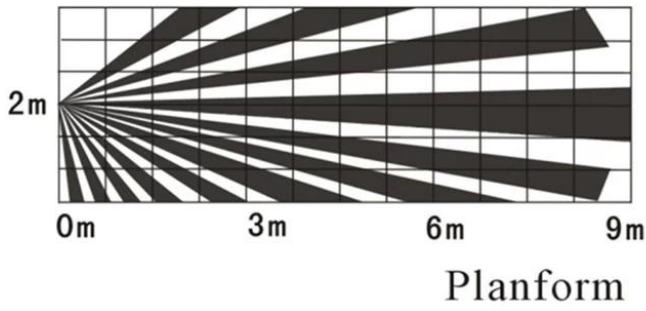

● Packing list

SMQT

	□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□	□□□□□□□ PIR □□□□□□□□□□
□□□□□□	100pcs / □□□□□□
□□□□□□□□□□	55 × 42 × 29 (□□.)
□□□□□□□□	20kg



● Office

SMQT



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

