

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance


MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

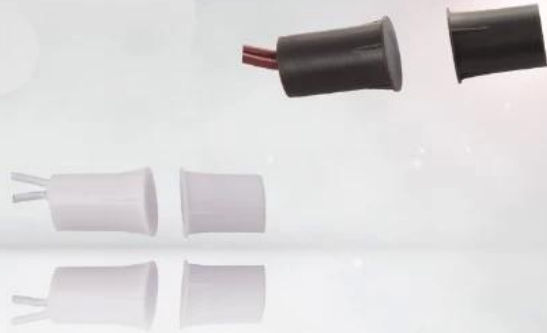

Parameter

SMQT

Model	EB-135
Dimensions	Φ10× 18.5 (mm)
Contact type	NO / NC (Optional)
Gap distance	20 ± 5 (mm)
Operating voltage	≤100VDC
Operating current	≤500mA
Power consumption	≤10W
Material	ABS / PC (Optional)
Color	White / Brown (Optional)
Application	ABS sensor
Operating temperature	-10 °C ~ 50 °C
Weight	8g

Introduction

SMQT

Introduction text area containing multiple empty rectangular boxes for content.

PRODUCT PICTURE



PRODUCT FEATURE



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to)



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.




Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

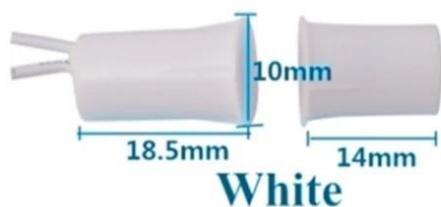





● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....