

ABS SMQT RFID 13.56MHz



EA-98KC

ABS SMQT RFID 13.56MHz	
Model	EA-98KC
Dimensions	88 × 88× 20 (mm)
Operating Voltage	12V ± 3VDC
Power Consumption	<1W
Frequency	13.56Mhz IC
Protection Level	IP66
Thickness	60mm
Read Range	150m
Interface	WG26 / WG34 (Optional)
Memory	1bit / MS
Encryption	4bit / 8bit (Optional)

□□□□□□□□□□	□□□□
□□	□□□□
□□□□□□□□□□	□□□□□□□□□□□□□□□□□□□□ WG
□□□□□□□□□□ temperature	-30 °C ~ 65 °C
□□□□□□□□□□	0.12kg

EA-98KC □□□□□□□□□□□□□□□□?

RFID frequency & WG format



Appearance



Size




Wire port introduction



- :DC 12V+
- :GND
- :D0
- :D1
- :LED
- :Beep

Suitable for?

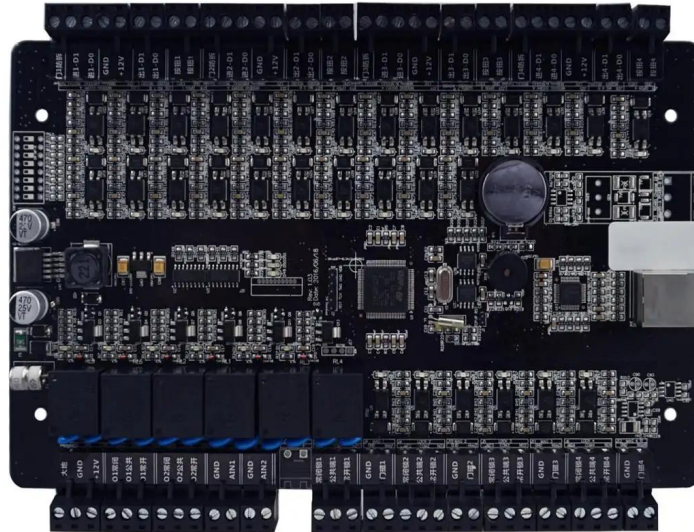

Suitable for all kinds of WG format door access control system
WG26/34(optional)
Card type:13.56MHz

□□□□□□□□□□ □ ?

