

Converter RS232 to RS485

Compatible with EIA/TIA RS-232, RS-485 standard

Interface: RS232 interface DB9 (holes)

RS485 interface DB9 (pin)

Transmission medium: normal cables


twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment: -10 to 80 °C

Working humidity: 5% to 95%

SMQT

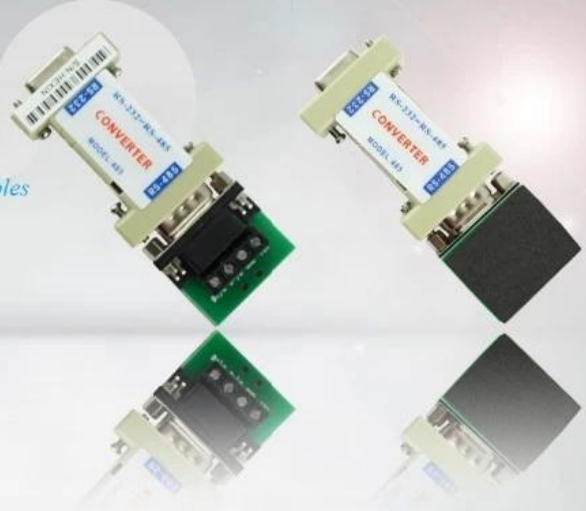

• Parameter

SMQT

Şartname	
Ürün adı	Dönüştürücü RS232 - RS485
Model	EA-01
Boyut	90 × 33 × 12 (mm)
Seri özellik	EIA / TIA RS-232C, RS-485 standardıyla uyumlu arayüz
Elektrik Arayüzü	S-232C terminal DB9 dişi konnektör portu, RS-485 terminali Terminalli DBP pin konnektör portu (dört veya altı kablo bağlantısı)
Çalışma yolu	Eşzamansız yarı dubleks
İletim ortamı	Normal hat, bükülmüş çifti veya ekranlanmış kablo
Aktarım hızı	300-115200BPS
İletim mesafesi	5 m (RS-232 terminali) 1200 m (RS-485 terminali)
Sinyal	RS-232: TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND RS-485: Tarih +, Tarih-, GND
Güç kaynağı	Verimli seri çalınma teknolojisi, harici güç kaynağı yok, gerçek üç hatlı (TD, RD, GND) iletişim sistemi
Renk	gri
Kullanımı	Giriş kontrol sistemi
Bağıl nem	% 5 -% 95
Ortam sıcaklığı	-10 °C ~ 85 °C
anlaşma mektubu	Şeffaf
Net ağırlık	0.106kg

• Introduction

SMQT

Kapı erişim kontrol sistemi bilgisayar yazılımı için RS232 -

RS485 dönüştürücü.





Converter RS232 to RS485

Dimension:90×33×12(mm)

*Interface compatible with EIA /
TIA RS-232C, RS-485 standard*

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

*RS-232: TXD, RXD, RTS, CTS, DTR, DSR,
DCD, GND*

RS-485: Data +, Data-, GND, 9V+

Relative Humidity:5%~95%

Environment temprature:-10 °C~85 °C

Welcome OEM, 2 years quality warranty

• Installation

SMQT®

Switch Power Supply



Door release button



Standalone controller

Converter
(RS232 to RS485)
EA-01



PC

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair