

Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed


Twisted-pair cables as transmission medium

With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT

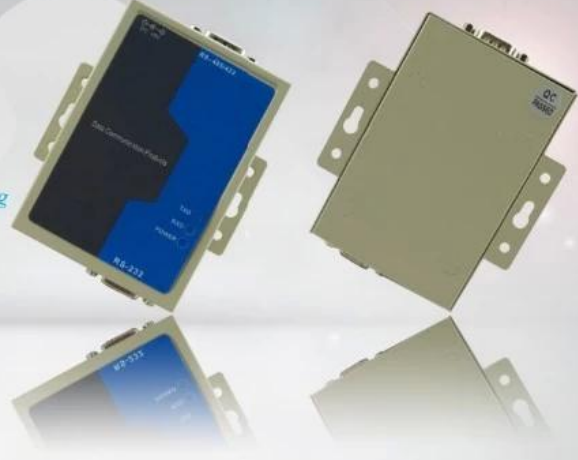

• Parameter

SMQT

Ürün boyutu	90L * 65W * 25.5H (mm)
Harici güç kaynağı	DC9V
Arabirim Özellikleri	EIA / TIA RS-232C, RS-485 / RS-422 standardı ile uyumlu arabirim
Elektrik Arayüzü	RS-232C arayüzü DB9 dişi konnektör portu, RS-422 / RS-485 Arayüzü DB9 dişi konnektör ve altı terminal ile donatılmıştır
Aktarım hızı	300-115,2KBPS
Sinyal göstergesi	Üç sinyal lambası TXD RXD POWER
İletim ortamı	Korumalı bükülmüş çift tel
Koruma sınıfı	RS-232 arabirimi $\pm 15\text{KVESD}$ koruma, hat başına yılda 600W'a kadar RS-422 / RS-485 arabirimi yıldırımdan koruma
İzolasyon	3500VRMS
İzolasyon Gerilimi	500VDC sürekli
Çevre	% 5 ila % 95
Çalışma sıcaklığı	0 ° C ~ 50 ° C

• Introduction

SMQT

Kapı erişim kontrol dönüştürücü 2 kablolu rs485 rs422 ethernet dönüştürücüdür. Ve ev için dc dönüştürücü.



• *Feature*

SMQT



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

• *Installation*

SMQT

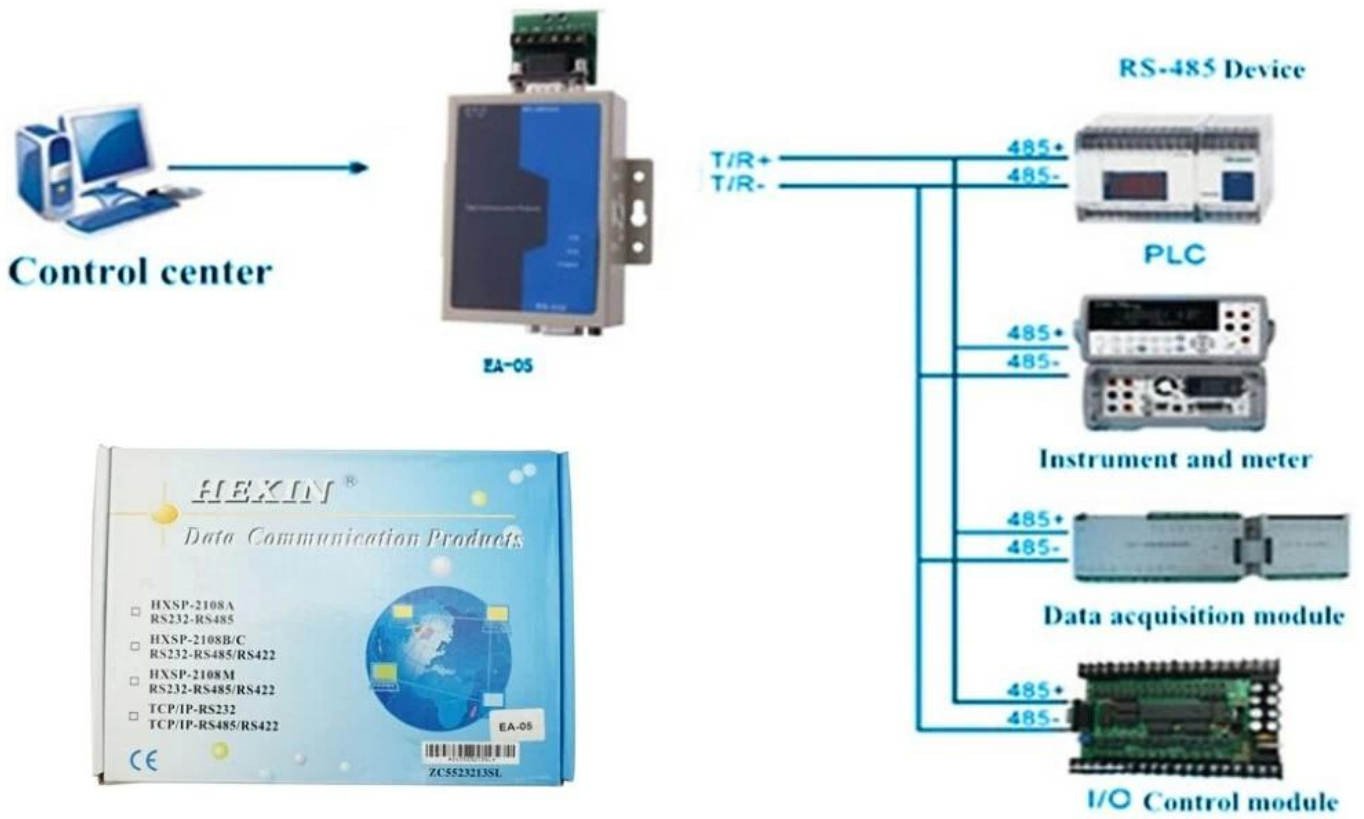

• Show case

SMQT®



• Packaging & shipping

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair