

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wiegth: A:210g B:280g C:290g

SMQT



• Parameter

SMQT

| Parametre | |
|------------------------|--|
| Ürün ismi | Deklanşör Kapı manyetik kontak sensörü |
| Model | EB-137 |
| Boyut | 106 × 38 × 10 (mm) |
| Kod mod | NO / NC (isteğe bağlı) |
| boşluk | 60 ± 10 (mm) |
| Max Voltaj | ≤100V DC Modu C: 12VDC |
| Max şu andaki | ≤500mA |
| Max değerlendirme | ≤10W |
| Renk | Gri |
| Takım elbise için | panjur kapı |
| Malzeme | A. alaşım zn, B.alloy-Al & Alaşım-zn C: kablosuz |
| Ağ ağırlık | A: 0.21Kg B: 0.28Kg C: 0.29Kg |
| Kablosuz Sıklık | 433Mhz (1527 çip kod) |
| telsiz iletim mesafesi | <100m |

• In-kind shooting

SMQT




• *Feature*

SMQT

EB-137A

EB-137B

EB-137C

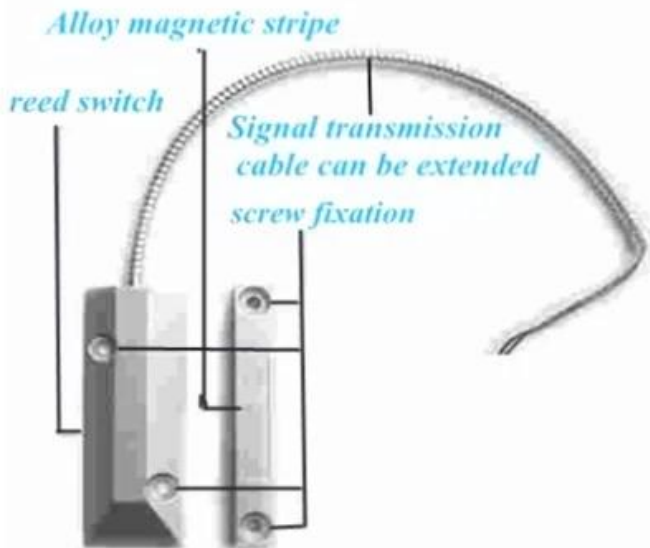

• *Packaging & shipping*

SMQT

Ambalaj listesi

| | |
|---------------|------------------------|
| Ürün adı | |
| miktar | Karton başına 50 parça |
| Karton boyutu | 38 * 30 * 30 (cm) |
| Ağırlık | 10 ~ 17kg |



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair