

## Wired infrared 2 beams perimeter detector



no intruding  
no across

### • Parameter

SMQT®

Tên sản phẩm	O cảm biến tia hồng ngoại outdoor
Số mô hình	ABT
điện áp làm việc	13,8 ~ 24VDC 11 ~ 28VAC
hiện hành	40-65mA
tốc độ Hiển thị	50 ~ 700m / giây
sản lượng chống phá dỡ	NC
nhiệt độ môi trường	-20 °C ~ + 50 °C
đầu ra báo động	NO / NC
điều chỉnh mức	180 ° ± 90 °
điều chỉnh Vertical	± 10 °
Màu	Đen
Vật chất	nhựa PC

### • Introduction

SMQT®

# PRODUCT PICTURE




Các máy dò chuyển động chùm rào hồng ngoại được sử dụng trên hàng rào như

công việc hàng rào máy dò hồng ngoại với hệ thống báo động.

## • Dimension

SMQT<sup>®</sup>

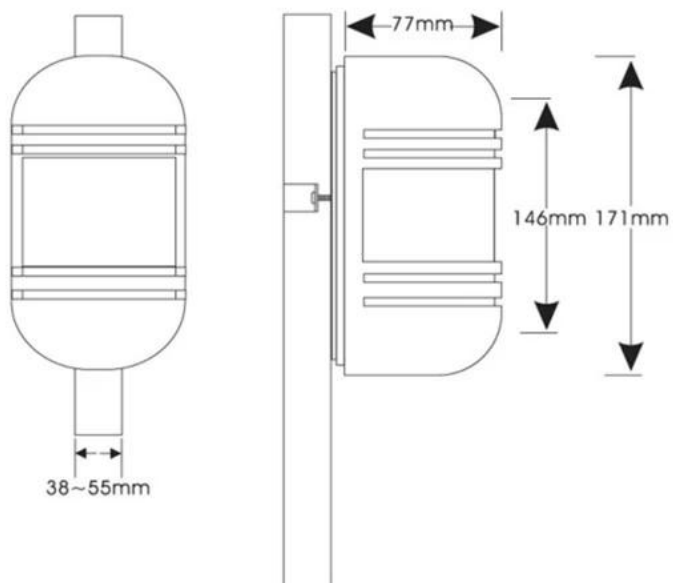

## • Feature

SMQT<sup>®</sup>

# PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity (AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrated optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

---

• *Packaging & shipping*

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair