

# Wired magnetic door sensor

Fireproof ABS material housing

20±5(mm) gap

Max voltage≤100V DC,Max current≤500mA

Use for wooden door or window

White/Black color optional

**SMQT**



## • Parameter

**SMQT**



Kích thước	64L * 19W * 13H (mm)
liên quan	Thông thường mở / thường đóng
khoảng cách hoạt động	20 ± 5 (mm)
áp lực tối đa	≤100VDC
tải trọng hiện tại	≤500mA
Công suất làm việc	≤10W
Vật liệu nhà ở	ABS hình dạng vật liệu chịu lửa
Màu	Brown / White
Phạm vi	cửa không màu hoặc cửa sổ
trọng lượng sản phẩm	24g

## • Introduction

**SMQT**

Việc chuyển đổi xúc cửa từ là cửa cảm biến có dây và cảm biến cửa sổ để kiểm soát truy cập cửa và hệ thống báo động.

# PRODUCT PICTURE

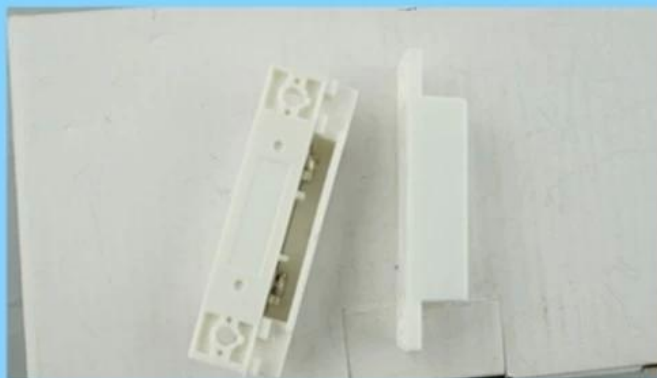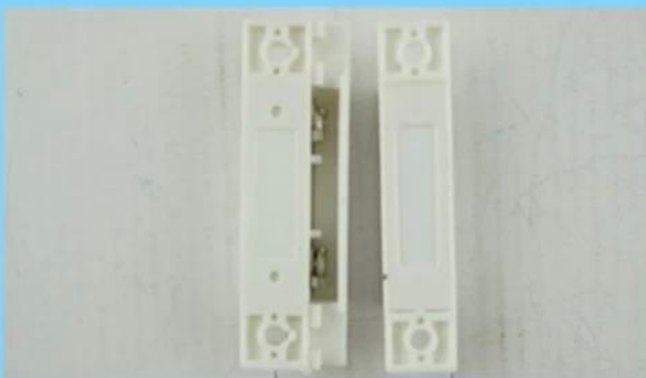

## PRODUCT FEATURE



White



Brown

2 Color optional

*Dimension: 64×19×13(mm)*

*NO/NC mode optional*

*20±5(mm) gap*

*MAX voltage ≤ 110VDC, MAX current ≤ 500mA*

*Fireproof ABS material housing*

*Suitable for wooden door or window*

*Brown/ White color optional*

*Weight: 24g*

*2 years quality warranty, welcome OEM*



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair