

Wireless door sensor


Fireproof ABS shell

DC 12V power supply

Wireless frequency 315Mhz/433Mhz optional

Wireless signal transmission distance max 100m

SMQT

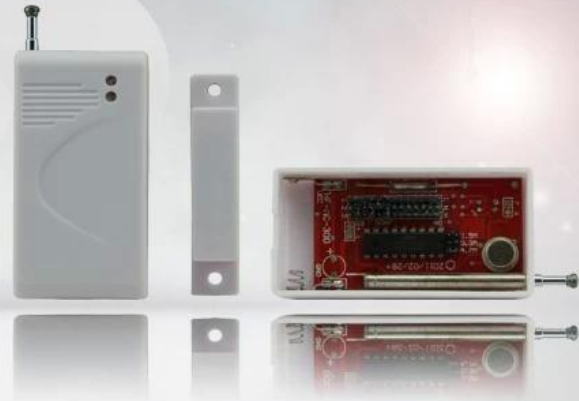

• Parameter

SMQT



Đặc điểm kỹ thuật	
Tên sản phẩm	cảm biến cửa từ không dây
Số mô hình	EB-130
Điện áp hoạt động	12V
khoảng cách hoạt động	40 ± 5 (mm)
tần số truyền dẫn	315MHZ / 433MHZ
khoảng cách truyền dẫn	≤100m

• Introduction


SMQT

Các bộ cảm biến liên lạc không dây cửa là từ cảm biến chuyển 12v và cảm biến báo động màn không dây cho hệ thống báo động.

PRODUCT PICTURE

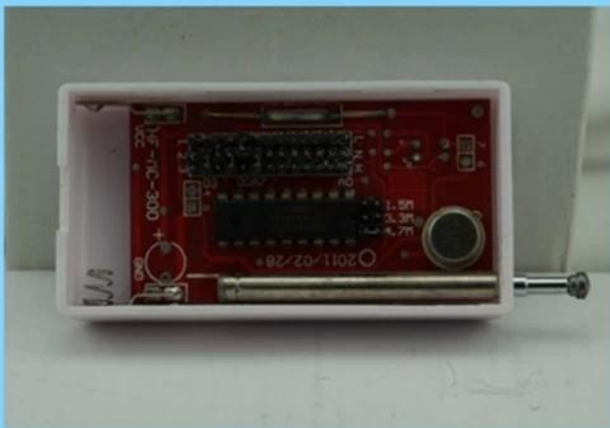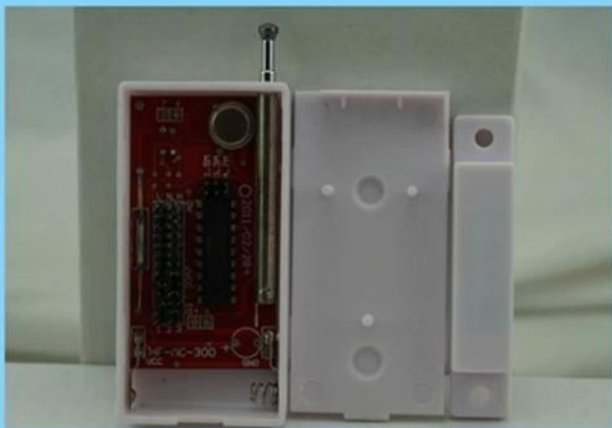

PRODUCT FEATURE

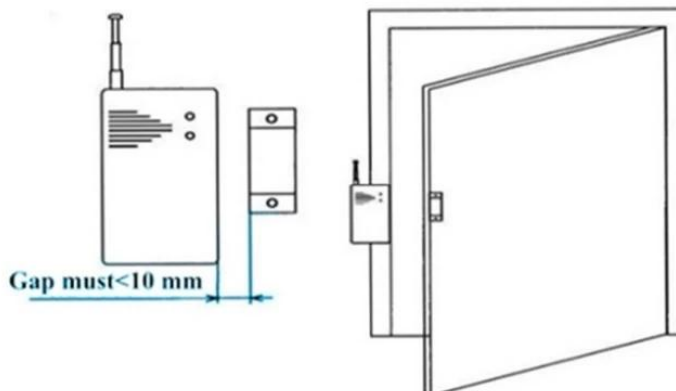

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

1. Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
2. Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....