

Wired infrared 2 beams perimeter detector



no intruding
no across



• Parameter

SMQT®

安裝環境	Outdoor 戶外安裝
安裝類型	ABT
工作電壓	13.8 ~ 24VDC 11 ~ 28VAC
工作電流	40-65mA
探測距離	50 ~ 700M / 可選
輸出類型	NC
工作溫度	-20 °C ~ + 50 °C
輸出類型	NO / NC
安裝角度	180 ° ± 90 °
安裝方式	± 10 °
安裝方式	Vertical
安裝方式	± 10 °
安裝方式	可選
安裝方式	可選 PC

• Introduction

SMQT®

PRODUCT PICTURE




□□□ □□□□□□ □□ □□□□□□ □□ □□□□□□ □□□□□□ □□□□ □□□□ □□□□ □□□□□□ □□□

□□□□□□ □□□□ □□ □□□□ □□□□ □□□□ □□□□□□□□ □□□□ □□□□□□.

• Dimension

SMQT[®]

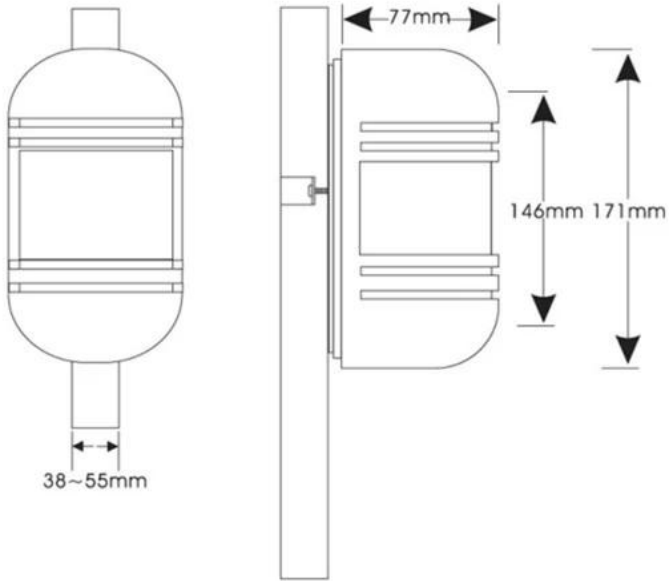

• Feature

SMQT[®]

PRODUCT FEATURE



Sealed integration structure is able to work in the harsh environment

Automatically regulate to confront with fog or inclement weather

Sensitivity (AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built-in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes, low-power digital

• *Packaging & shipping*

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....