


2020 年 1 月 1 日 至 2020 年 12 月 31 日 期间 发生 的 所有 事件 均 被 记录 在 案。 2020 年 1 月 1 日 至 2020 年 12 月 31 日 期间 发生 的 所有 事件 均 被 记录 在 案。 COVID-19



with face temperature and mask checking





□□□□□□ □□□□□□ **MF-T1008**

	2020 年 新型冠状病毒肺炎 疫情 防控工作 领导小组 办公室 关于印发《 新型冠状病毒肺炎 疫情防控工作 指南》的通知 COVID-19	
	MF-1008A	MF-1008B
	Hi3516DV300	
	Linux	
	16 GB EMMC	
	1 / 2.7 "CMOS	
	4.5 mm	
	7 inch TFT	
	600 * 1024	
	16: 9	

摄像机 摄像机	摄像机 摄像机 摄像机 摄像机 摄像机 摄像机	
摄像机 摄像机	8 摄像机Ω / 2 摄像机	
摄像机 摄像机		
摄像机 摄像机	摄像机 摄像机 摄像机 摄像机 摄像机 摄像机	
摄像机 摄像机	2 1080 * 1920 摄像机 摄像机	
摄像机 .摄像机	0.01 摄像机Lux @ F1.2 (ICR) 摄像机 B / W 0.001Lux @ F1.2	
SNR	≥ 50 摄像机 (AGC OFF)	
WDR	≥80 摄像机	
摄像机 摄像机		
摄像机	1.2-2.2 摄像机 摄像机 摄像机 摄像机 摄像机	
摄像机	0.5-2 摄像机	
摄像机 摄像机	摄像机 40 ± 摄像机	
摄像机 .摄像机	<500ms	
摄像机	摄像机 100000 摄像机 22400 摄像机 摄像机 摄像机	
摄像机 摄像机		
摄像机	30-45 (°C)	
摄像机	± 0.5 (°C)	
摄像机	0.4 摄像机	
摄像机 摄像机	<500ms	
摄像机 摄像机		
摄像机 摄像机	摄像机 RJ45 10M / 100M	
摄像机 Weigand	34 摄像机 26 摄像机 / 摄像机 摄像机	
摄像机 摄像机	1 摄像机 摄像机 摄像机	
摄像机 USB	1 摄像机 USB (摄像机 摄像机 摄像机 摄像机)	
摄像机 摄像机		
摄像机 摄像机	摄像机 3 / 摄像机 12 摄像机 摄像机	
摄像机 摄像机	20 摄像机 摄像机) 摄像机)	
摄像机 摄像机 摄像机	-15 摄像机 摄像机 60 + ~ 摄像机 摄像机	
摄像机	5 ~ 90 摄像机 摄像机	
摄像机	123.5 (266 * (摄像机) 45.5 * (摄像机 摄像机 (摄像机)	123.5 (摄像机 (摄像机) 266 * (摄像机) 45.5 * (摄像机
摄像机	1.9 摄像机	2.1 摄像机

摄像机 摄像机 MF-T1008 摄像机

Size

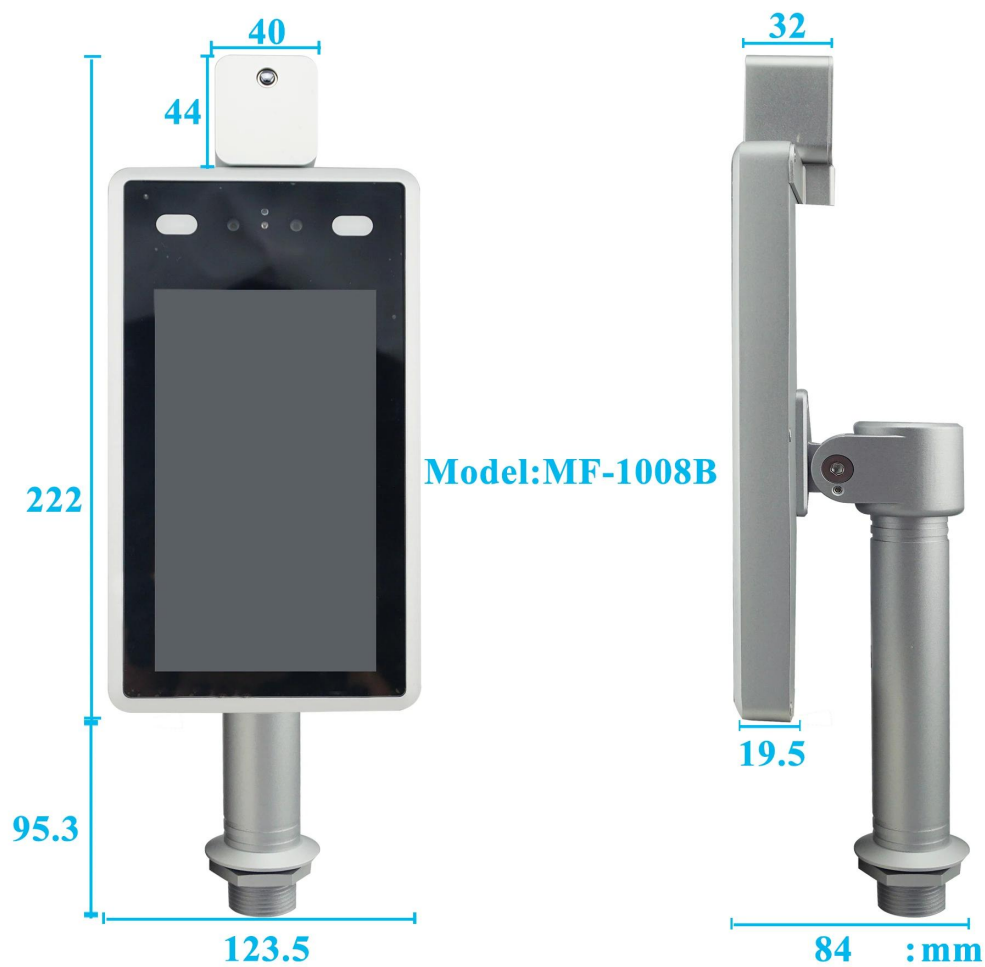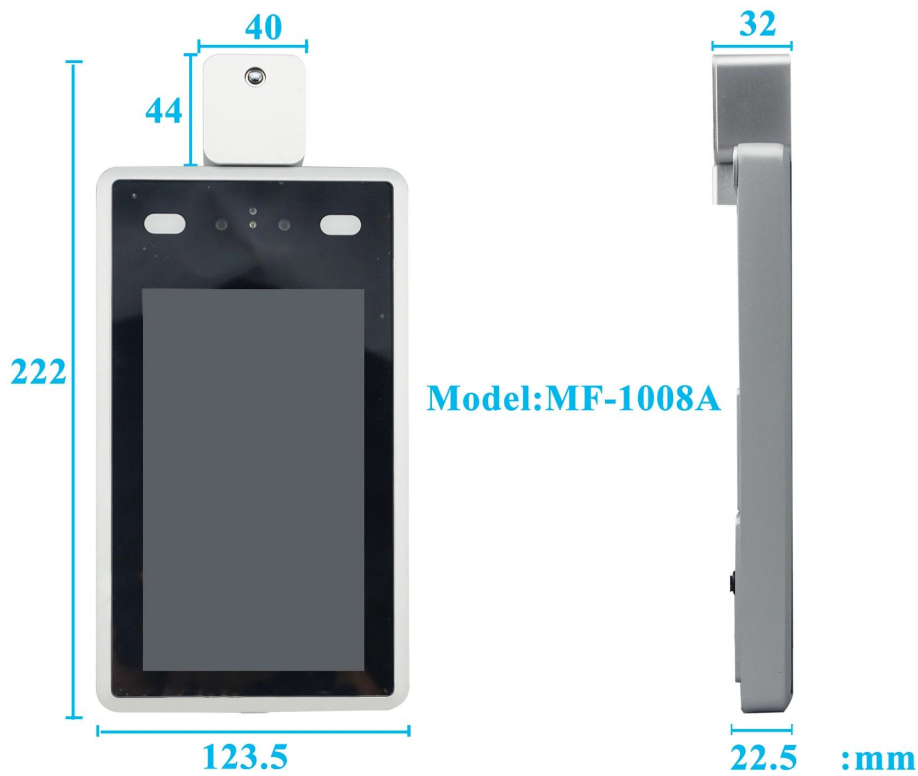


Device Feature

10 system languages and voice adjustable

English
繁体中文
русский
Deutsch
Le français
한국어
Português
Espanol
lingua italiana
日本の


Celsius and Fahrenheit temperature display adjustable

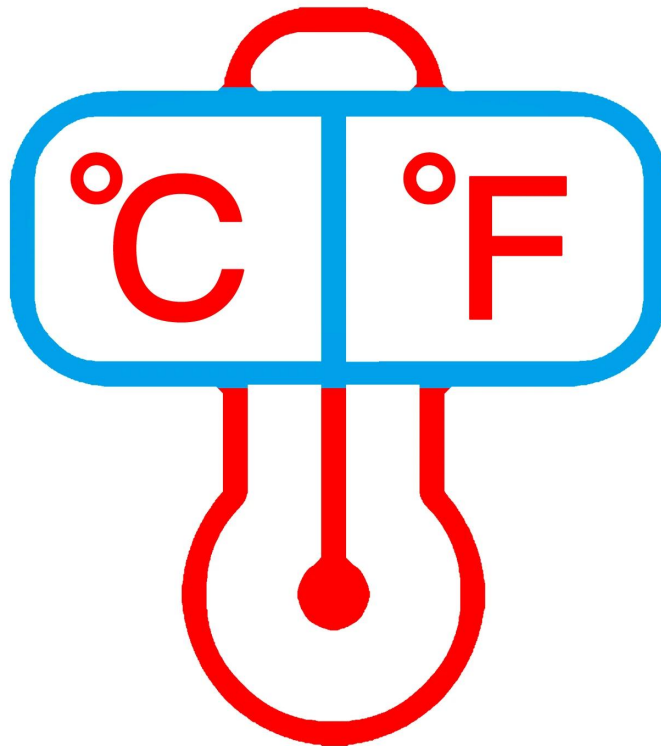

Wire interface introduction



Browser software interface

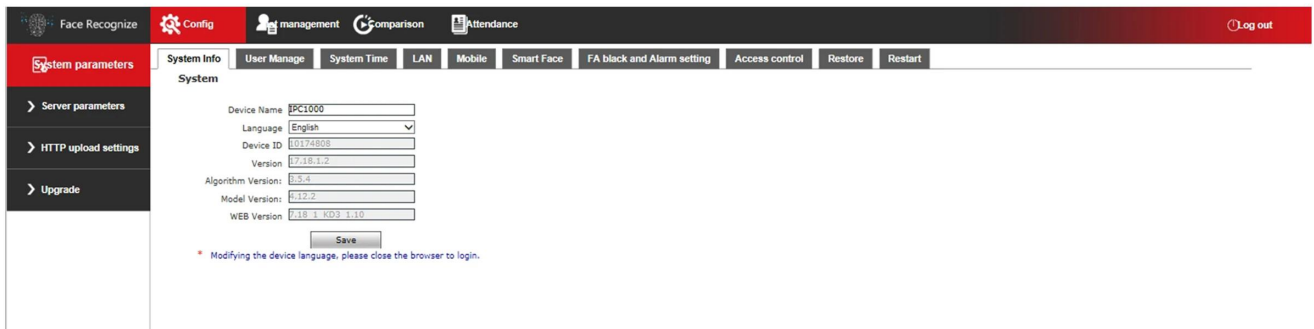

Body temperature detecting in live



MF-1008A



MF-1008B

Temperature measurement range 30-45 (°C) Accuracy $\pm 0.5(^{\circ}\text{C})$;

Automatically identify unmasked personnel and provide real-time warning;

Support mid-range temperature measurement and real-time warning of high temperature;

Support temperature data SDK and HTTP protocol docking;

Support binocular live detection;

Unique face recognition algorithm to accurately recognize faces, face recognition;
time <500ms;

Adopt Linux operating system for better system stability;


IP34 rated dust and water resistant;

MTBF> 50000 H;

Support 22400 face comparison library and 100,000 face recognition records;

Support one Wiegand input or Wiegand output;


Packages

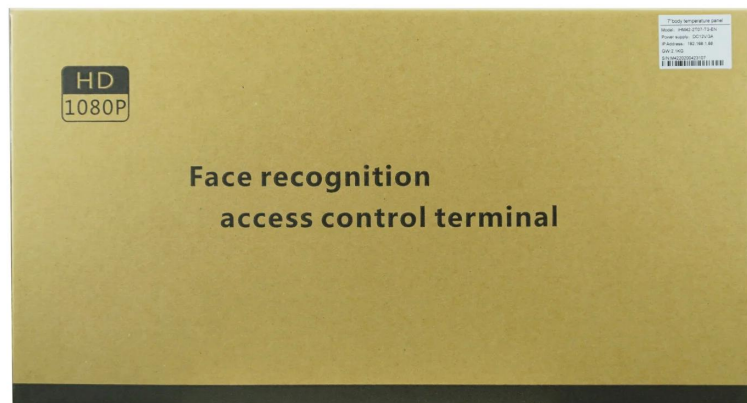

Optional Bracket



A bracket
For MF-1008B




B bracket
For MF-1008B

0.55m



C bracket
For MF-1008B

1.1m

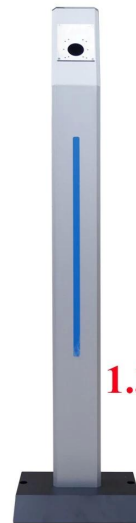

D bracket
For MF-1008A

1.3m

Access control & Time attendance



Apply to a variety of **access control** and **time attendance** sites, such as factories, offices, schools, supermarkets, and so on.

□□□□ □□□□ □□ □□□□



