

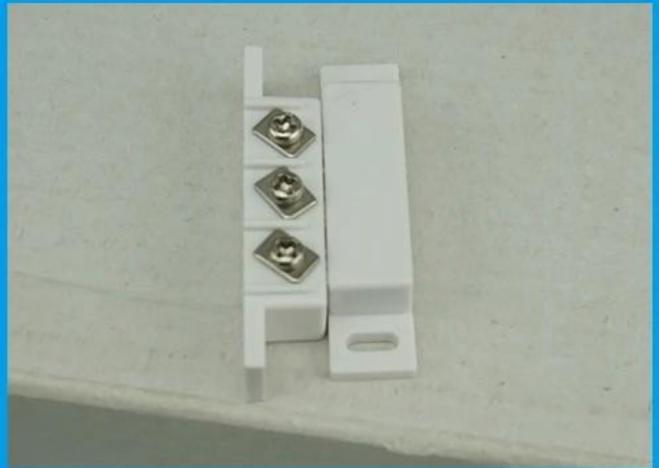
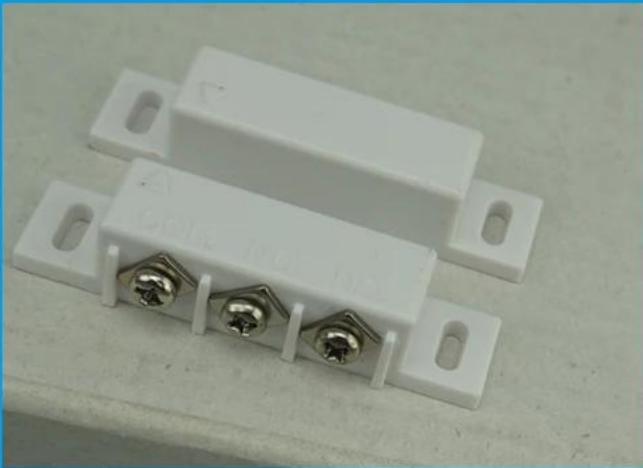


New

Access control & Alarm product supplier

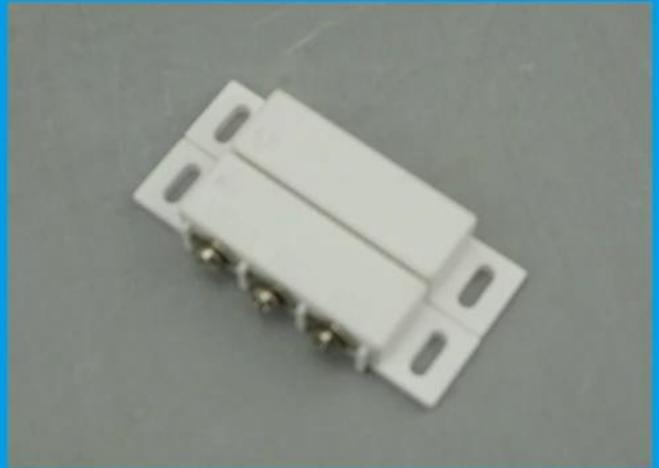

EB-131B

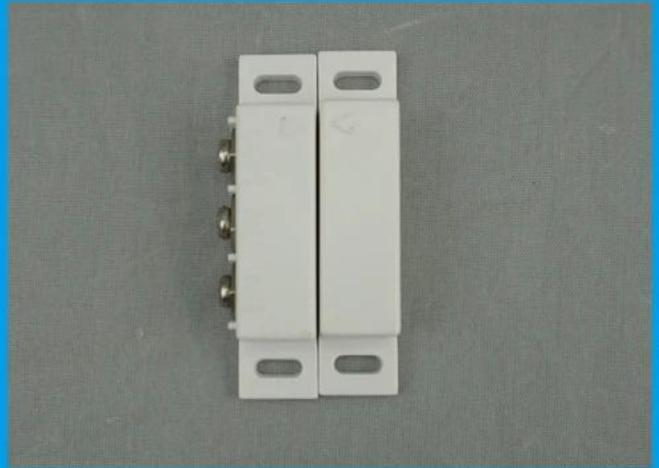

EB-131B



EB-131B'S MAIN PARAMETER

□□□□□ □□:	3 □□ □□□□□□□ □□□□□□□ □□□□□□□ NO / NC / COM □□□□□□□
□□□□□□ □□:	EB-131B
□□□□□□□ □□□□□ □□□□□:	Max DC 100V
□□□□ □□□□□:	0.5 □□□□A
□□□□□□ □□□□□□□:	10W
□□□□□□ □□□□:	NO / NC / COM
□□□□□□ □□□□□□:	20 ~ 30mm □
□□□□:	(□□) 11.5 * 12.5 * 55 :□□□□□ □□□ (□□) 11.5 * 12.5 * 55 :□□□□□□□□□ □□□
□□□ □□ □□□ □□□□□□:	□□□□□□ □□ □□□□□ □□□□□ □□□□□ □□□□□ □□□□□ □□□□□ □□□□□ □□□□□
□□□□:	ABS □□□□□□□ + PCB □□□□□□□ □□□ + □□□□□
□□□□□ □□□:	□□□□□□□□) □□□□□□ / □□□□□□
□□□:	13 :□□□□□□□G 10 220 □□□□□ □□□ □□□ □ □□□□□ □□□ □□□□□G
□□□□:	2 □□□□□□ □□□
OEM:	□□□□□□□□ □□□□□□□ □□□□□ □□□□

EB-131B



1. 3 contacts wired magnetic door sensor

2. Working voltage: Max 100V DC

3. Working current: max 0.5A

4. Power consumption 10W

5. Wired port: NO/NC/COM


6. Suitable for access control system and alarm system

7. CE certificate



8. 2 years warranty, welcome OEM

☐☐ ☐☐☐ **EB-131B** ☐☐☐☐☐☐☐☐ ☐☐☐☐☐☐☐

Size

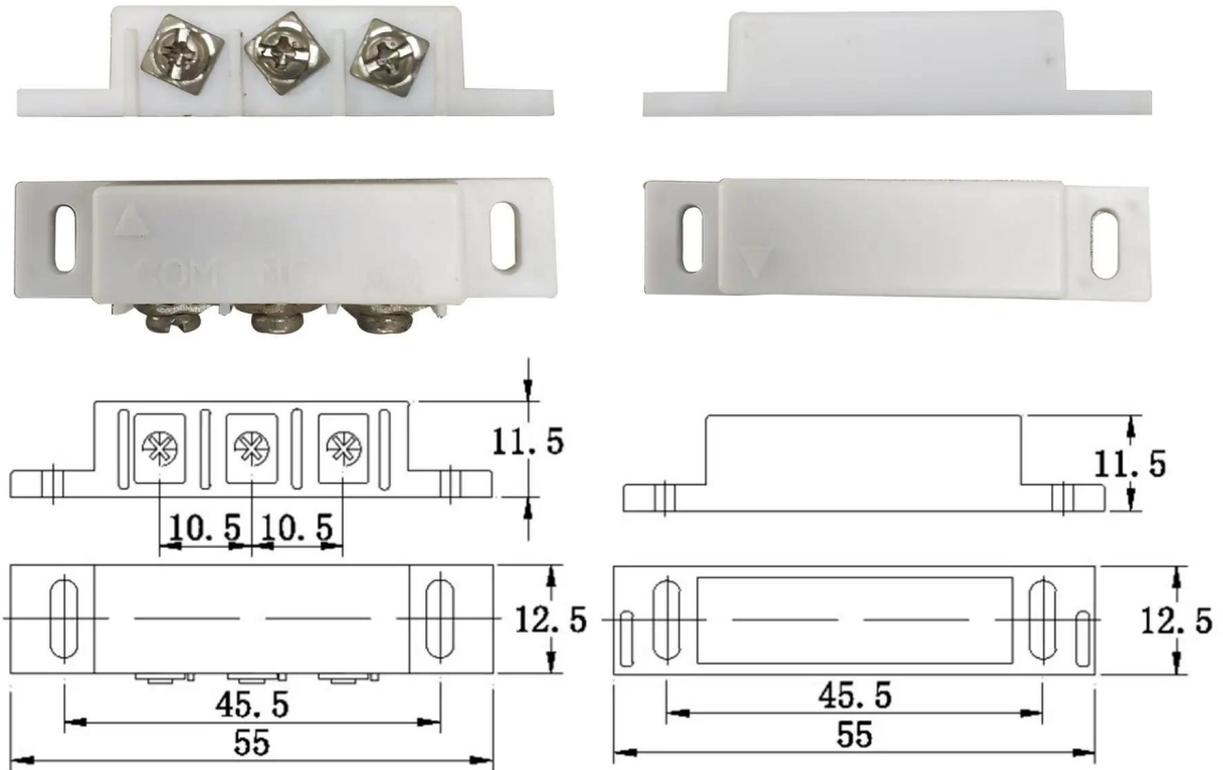

Installation & working principle

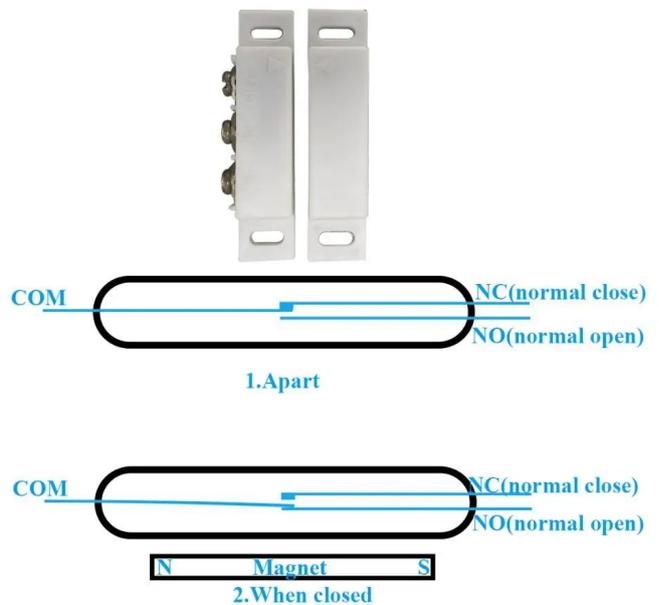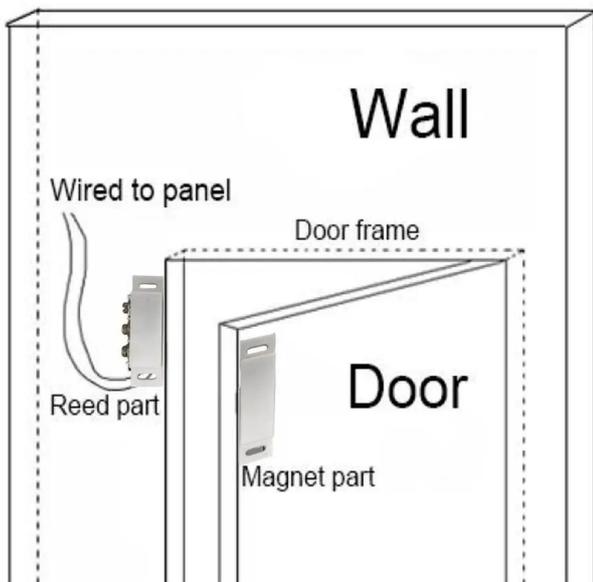


□□□□ □□□□ □□□ □□□


SMQT
铭汗科技



SMQT
铭汗科技

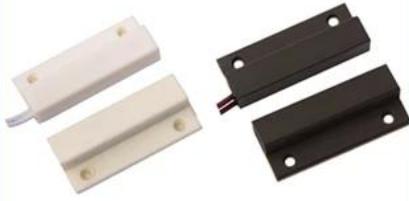

SMQT
铭汗科技

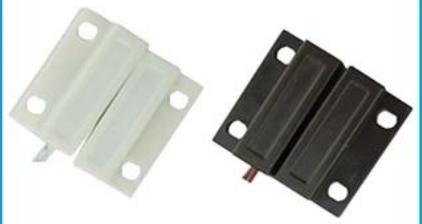

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

