• Parameter

SMQT

□□□□□□	
□□□□□	EA-27A / B / C / D
□□□	□□□□□ □□ □□□□□ □□□ □□□□□□
□□□	86 * 50 * 20 (□□□)
□□□□□ □□□□□□□□ □□□□	12V ± 3VDC
□□□□□□□ □□□□□□	NO / NC / COM
□□□□□□□□□□ □□□□□□□□	500000 □□□□□□ □□□□
□□□□ □□□	□□□□□□□) □□□□ / □□□□ / □□□□)
□□□□□□ □□	□□□□□□□□□□ □□□□
□ □□□□	□□□□□□ □□ □□□□□□ □□□□
□□□□□□ □□□□□	0.05KG

• Introduction

SMQT

□□ □□□□□□ □□□□□□ □□□□□□ □□□□□ □□□□□ □□ □□ □□□□□□ □□ □□□□□ □□□□□ □□□□□ □□□□□□.

•Feature

SMQT

EA-27A

EA-27B

EA-27C

EA-27D

THE ONE

Strong stability

PC rubber seal lock core, resistance to heat shock, 500，000 times mechanical test qualified, suitable for all Access control system

THE SECOND

Superior Design

Simple and beautiful appearance, stainless steel wire drawing panel.

THE THIRD

OEM

LED backlight's color red/blue green optional, print logo or other service

•Installation

SMQT

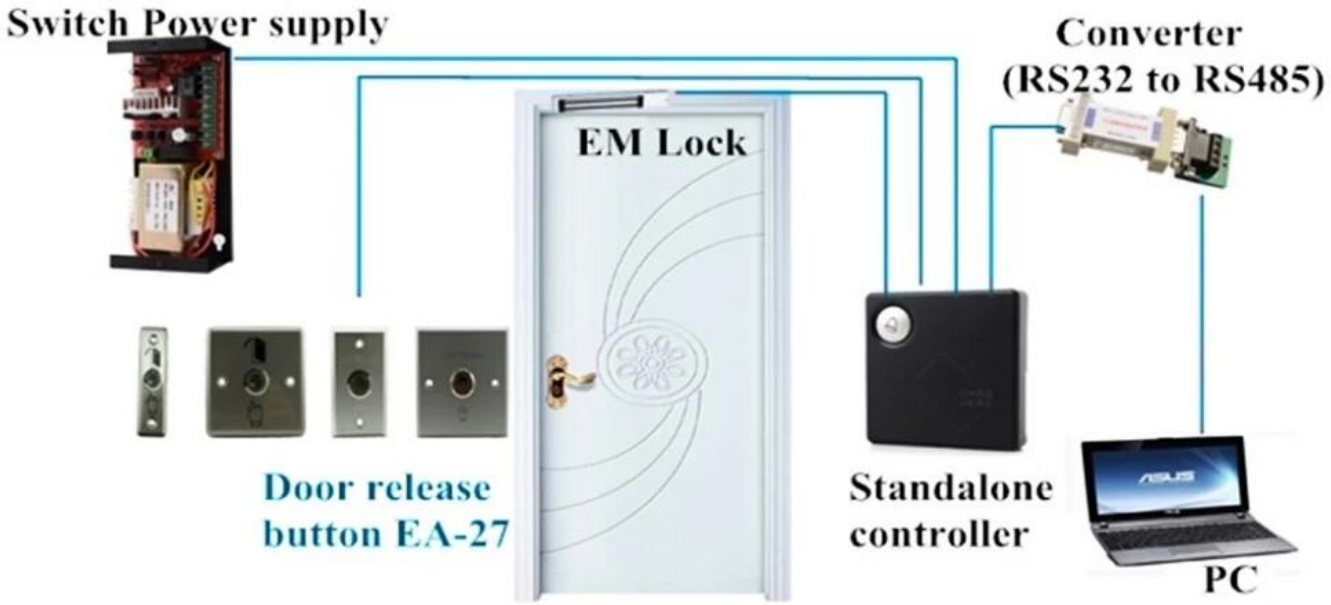

•Office show

SMQT

•Exhibition

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair