□□□□ □□□□□□□ □□□□□ □□□ □□□□□□ □□□□ □□□□□□ □□ □□□□□□□ □□□□□□□□□□ □□□□□

EA-903'S MAIN □□□□□

□□□□□	
□□□:	□□□□ □□□ □□□□□□ □□□ □□□□□□□ □□□□□ □□□ □□□□□□ □ □□□□□□□□□□ □□□□□ □□□□□□
□□□□□ □□□:	DC12V □□□□□□□ □□□□□□ & lt350 □MA
□□□□□:	160MM × 92mm × 30mm □
□□□:	0.28KG
Woring □□□□□□□ □□□□:	- 20 ℃ ~ 50 ℃
□□□□□ □□□□□:	10□ ~ 85□
□□□□□□□ □□□:	500 □ □□□□ □□□□ □□□□□□□ □□□□ 1500 □ □□□□□ □□□ 500 □ □□□ 100000 □□□ □□□□□□ □□□□ □□□□ □□□□□□□ □□□□
□□□□□□□□ □□□□:	≤0.5s
FRR:	□□□□□□□ & lt0.01 □□
□□□□□:	□□□□□□□ & lt0.001 □□
□□□□□□□ □□□□□:	TCP / IP □ □□□ U □ RS485
□□□□□ **WG:**	WG26 / WG34 □□□□□□□ □□□□
□□□□□ □□□□□□□□ □□□□:	□□□□□□ □□□□□ □□□□ □□□ □□□□□□ □□□
□□□□□□□ □□□:	10 □□□□□□□□□ □ □□□□□□□ □□□□□□□□ □ □□□□□□□) □□□□□□□ □□□□□□□ □□□□□□ □ □□□□□□□□□□□ □ □□□□□□□ □ □□□□□□□□□□ □ □□□□□□□□□ □ □□□□□□□□ □□□□□□□□□□□)

□□□□□ EA-903 □□□

Device introduction

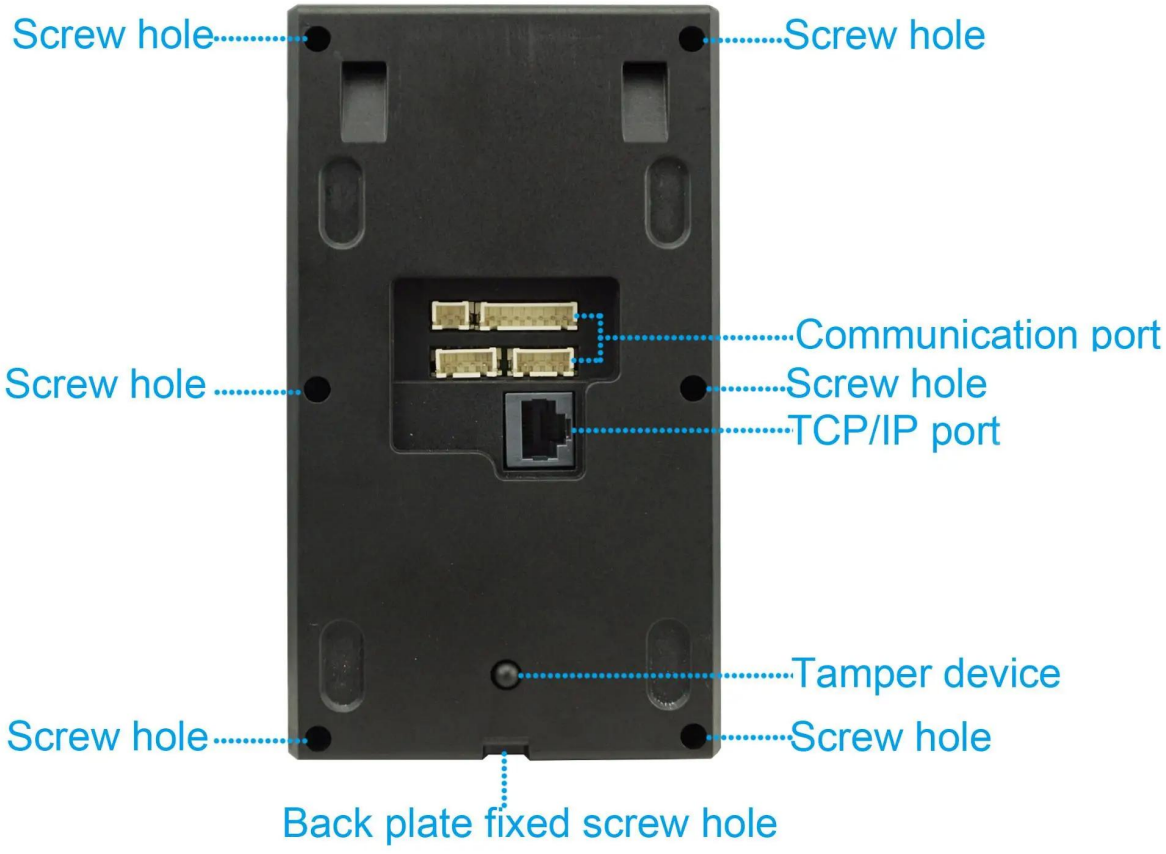

Back plate fixed hole
Back plate fixed hole
Back plate fixed screw hole

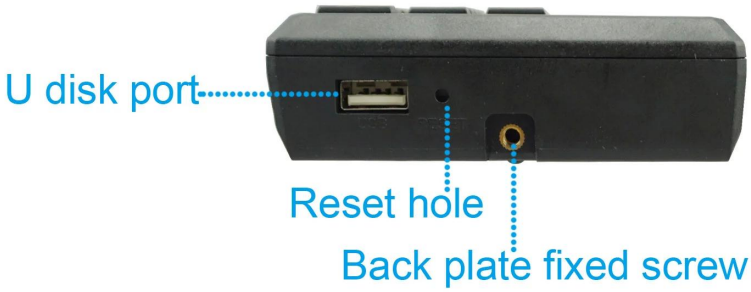
U disk port
Reset hole
Back plate fixed screw hole

Wire diagram

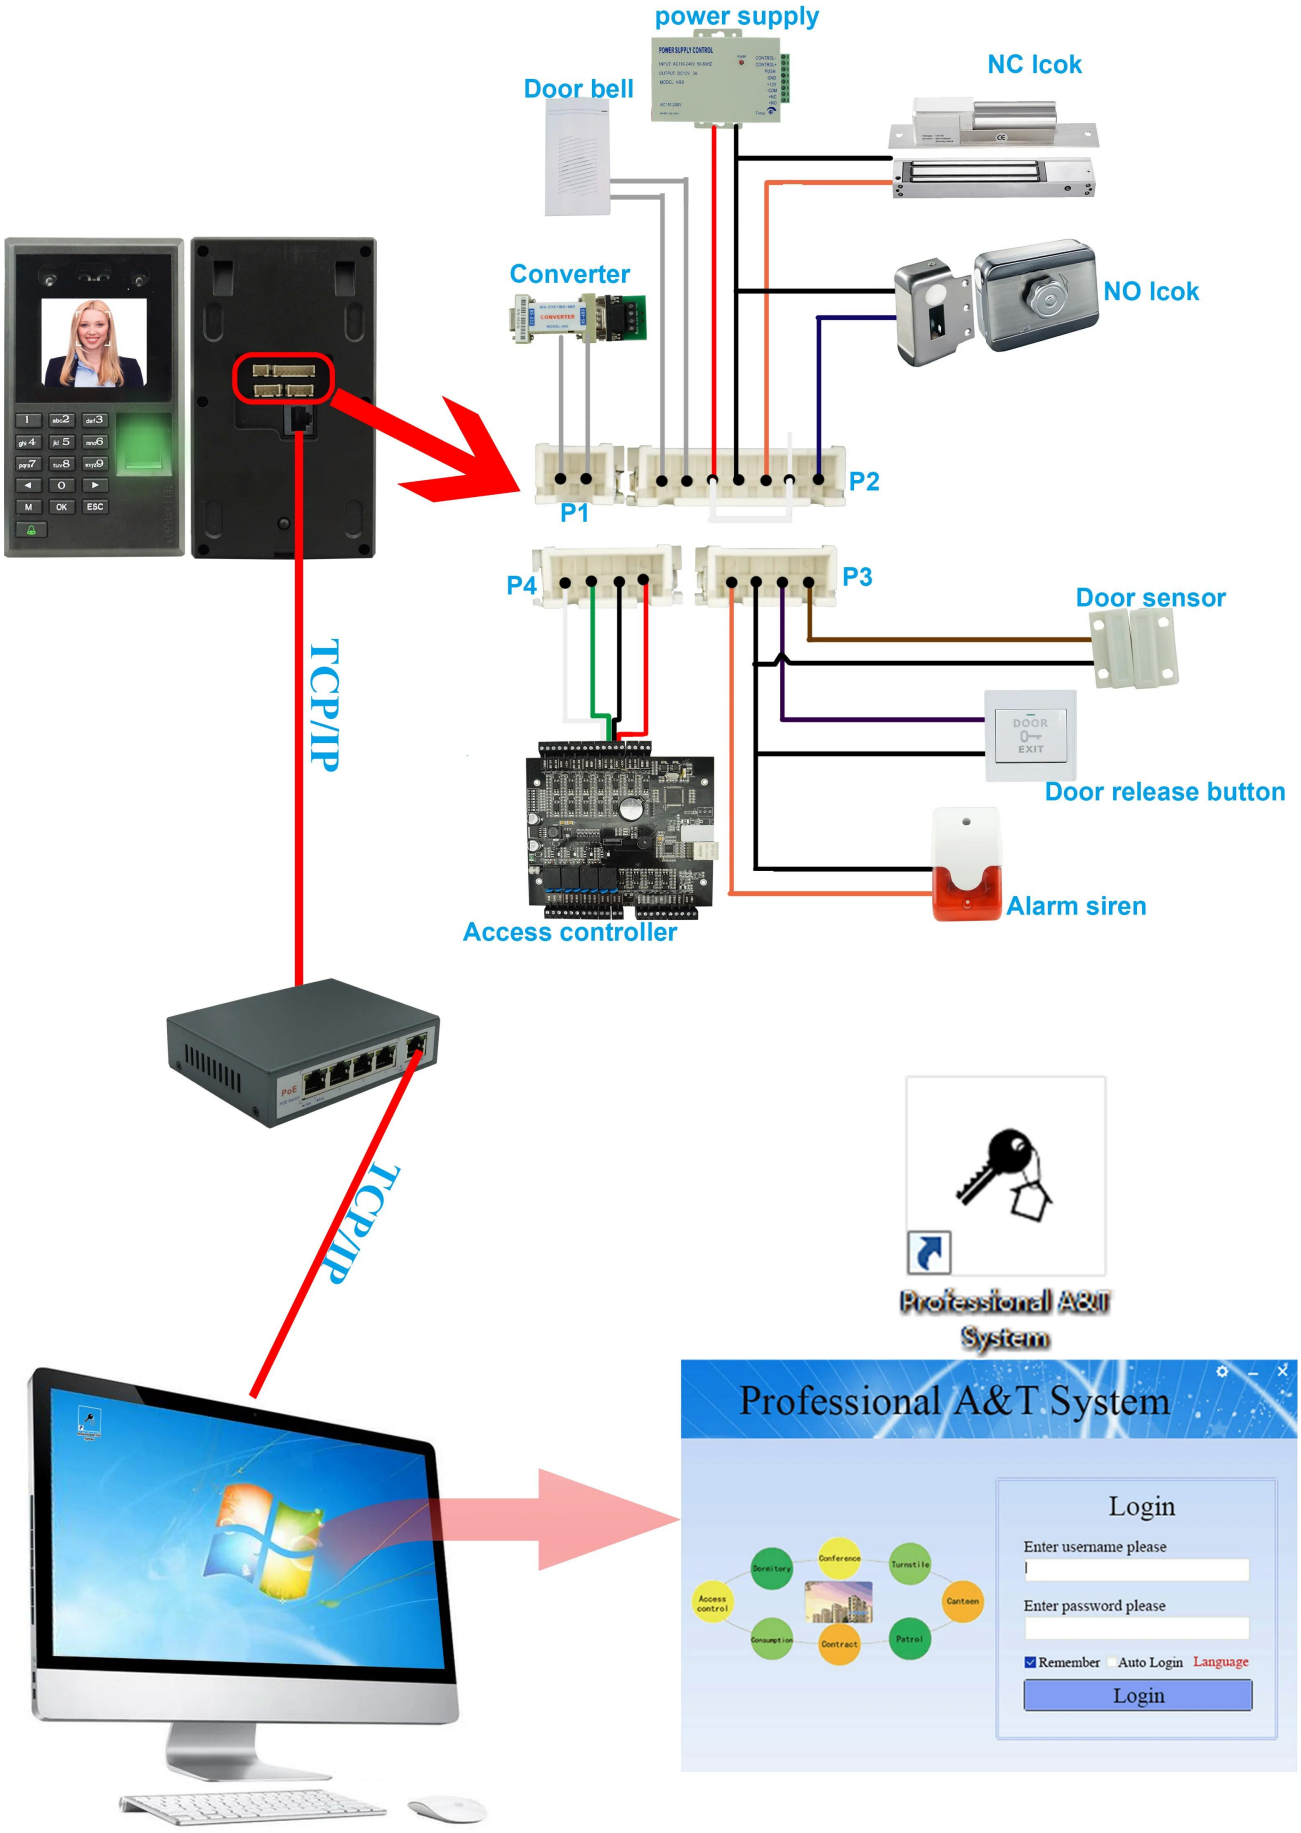

Packaging

1
abc2
def3
ghi 4
jkl 5
mno6
pqrs7
tuv8
wxyz9
0
M
OK
ESC
CONTROLLER

25minutes 225megabytes
disc
Recordable
Speed
Do not put in direct sunlight for a prolonged period

[illegible]

SMQT
铭汗科技

SMQT
铭汗科技

SMQT
铭汗科技

SMQT
铭汗科技

SMQT
铭汗科技

SMQT
铭汗科技

SMQT
铭汗科技



SMQT
铭汗科技

SMQT
铭汗科技