

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight



• Parameter

SMQT

品名	有线磁控开关
型号	EB-135
规格	Φ10 × 18.5 (mm)
触点形式	NO / NC (可选)
间隙	20 ± 5 (mm)
额定电压	≤100V 直流
额定电流	≤500mA
额定功率	≤10W
材料	ABS (阻燃) / 塑料
颜色	ABS 白色/棕色 可选
适用温度	-10 °C ~ 50 °C
重量	8G

• In-kind shooting

SMQT



• *Feature*

SMQT



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

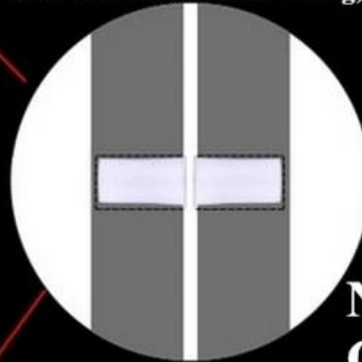

Notice:
Gap < 2cm




Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional



White

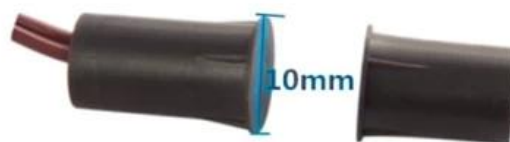

Brown

• Packaging & shipping

SMQT®

□□□□□□ □□□□□□ □□□□□	
□□□□□ □□□	□□□□□□ □□□□□□□□□ □□□□□□□□ □□□□ EB-135
□□□□□□	2000 □□□□□□□□ □□ □□□□ □□□□□□ □□□□
□□□□□□ □□□□□□ □□□	38 * 30 * 30 (□□)
□□□	21 □□kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....