Converter RS232 to RS485

Compatible with EIA/TIA RS-232.RS-485 standard

Interface:RS232 interface DB9(holes)

RS485 interface DB9(pin)

Transmission medium:normal cables

twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment :-10 to 80 ℃

Working humidity:5% to 95%

SMQT

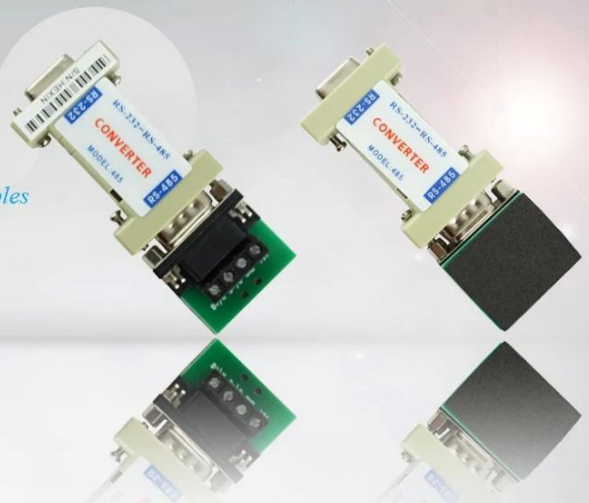

• Parameter

SMQT

□□□□□	
□□□□□□ □□□	□□□□□ RS232 □ RS485
□□□□□	EA-01
□□□	90 × 33 × 12 (□□□)
□□□□□□□ □□□□	□□ □□□□□□□ □□□□□ EIA / TIA RS-232C□ RS-485 □□□□□□□□
□□□□□□□□□□ □□□□□	S-232C DB9 □□□□ □□□□ □□□□□□ □□□□□□□ RS-485 □□□□ DBP □□□□□ □□ □□□□ □□□□ □□□□ □□□□□□□ □□□ □□ □□□□□ □□□□□□□))
□□□□□ □□□□□	□□□□□□□□ □□□ □□□□□□ □□□
□□□□□□□□ □□□□□□	□□□□□ □□□□ □□ □□□ □□□□□□□□ □□□□□ □□
□□□□□□ □□□□	300-115200BPS
□□□□□□ □□□	5 □□□□) □□□ RS-232) 1200 □□□□) □ RS-485)
□□□□□	RS-232: TXD□ RXD□ RTS□ CTS□ DTR□ DSR□ □□□ □□□□□□ □□□□□□□ GND RS-485: □□□□□ +□ Date-□ GND
□□□□□□ □□□□	□□□□□□□ □□□□□ □□ □□□□□□□□□ □□□□□□ □□□□□□□ □□ □□□□□□□□□□ □□□□□ □□□□□□□□□ □□□□ (TD□ RD□ GND) □□□□□ □□□□
□□□□□	□□□□□ □□□
□□□□□□□	□□□□□□ □□ □□□□□□ □□□□
□□□□□□□ □□□□□□□	5□ ~ 95□
□□□□□□ □□□□□□□□□□	-10 ℃ ~ 85 ℃
□□□□□ □□□□	□□□□
□□□□□□ □□□□□	0.106kg

• In-kind shooting

SMQT

•*Feature*

SMQT

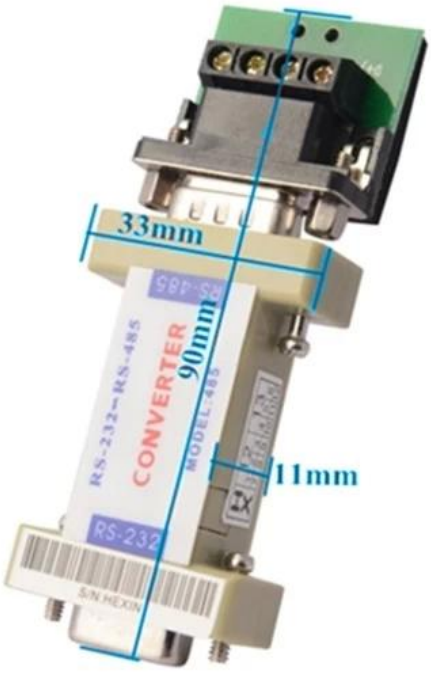

EA-01

Converter RS232 to RS485

Dimension:90×33×12(mm)

Interface compatible with EIA / TIA RS-232C, RS-485 standard

RS-232 terminal DB9 female connector port

RS-485 terminal DBP pin connector port

RS-232: TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND

RS-485: Date +, Date-, GND,9V+

Relative Humidity:5%~95%

Environment temprature:-10 ℃~85 ℃

Welcome OEM, 2 years quality warranty

•Application

SMQT

•Packaging & shipping

SMQT

□□□□□□□□□ □□□□□□□□ □□□□□	
□□□□□□ □□□	□□□□□ RS232 □□□ RS485 EA-01
□□□□□□□	100pcs □□□□□□□ □□ □□□□
□□□□□□ □□□□□ □□□	53 * 40 * 37 (□□)
□□□	10KG

• *Office show*

SMQT

• *Exhibition*

SMQT