Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed

Twisted-pair cables as transmission medium

With protection of ±15KVESD,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT

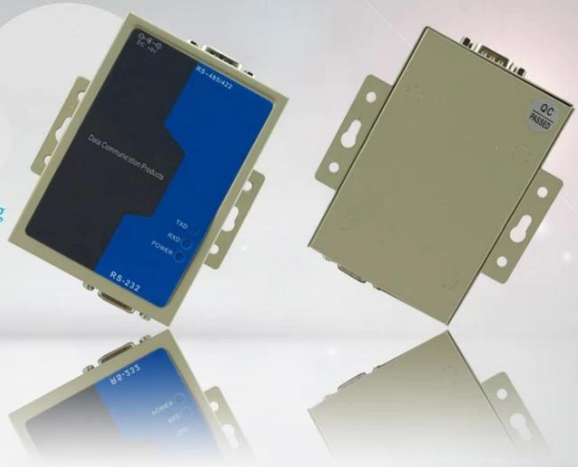

• Parameter

SMQT

□□□□□	
□□□□□□ □□□	□□□□□□□□ □□□□□□□ □□□□□ RS232 □□□ RS485
□□□□□	EA-05
□□□	90L * 65W * 25.5H (□□)
□□□□□□ □□□□□□□ □□□□□□□□	9 □□□□□□□V
□□□□□□□ □□□□	□□ □□□□□□□ □□□□□ EIA / TIA RS-232C□ RS-485 / RS-422 □□□□□□□□
□□□□□□□□□□ □□□□□	RS-232C □□□□□ DB9 □□□□ □□□□ □□□□□□□ RS-422 / RS-485 □□□□□ DB9 □□□□ □□□□ □□□□□□ □□□□□ □□ □□□□□
□□□□□ □□□□□	□□□□□ □□□□□ □□□□□ TXD RXD □□□□□□
□□□□□□□□ □□□□□□	□□□□□□□ □□□□□□□□ □□□□□
□□□□□□ □□□□	300-115.2KBPS
□□□□□□□ □□□	RS-232 15 ± □□□□□KVESD □□□□□□ RS-422 / RS-485 600□ □□□□□W □□□□□ □□ □□□□□ □□ □□□□□□
□□□	3500VRMS
□□□□□	□□□□□ □□□
□□□□□□□	□□□□□□ □□ □□□□□□ □□□□
□□□□□□□ □□□□□□□	5□ ~ 95□
□□□□□□ □□□□□□□□□□	0 ℃ ~ 50 ℃
□□□□□□ □□□□□	0.62KG

• In-kind shooting

SMQT

•Feature

SMQT

EA-05

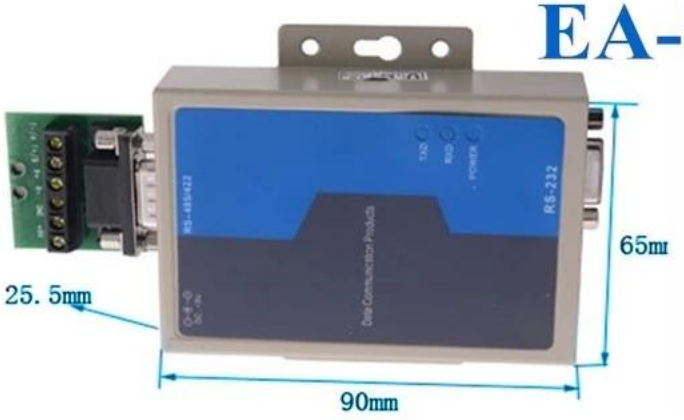

Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port, RS-422/485 Interface DB9 female connector

Transmission medium:shielded twisted pairwire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity:5%~95%

Environment temprature:0 ℃ ~ 50 ℃

Net weight:0.62kg

Welcome OEM and 2 years quality warranty

•Application

SMQT

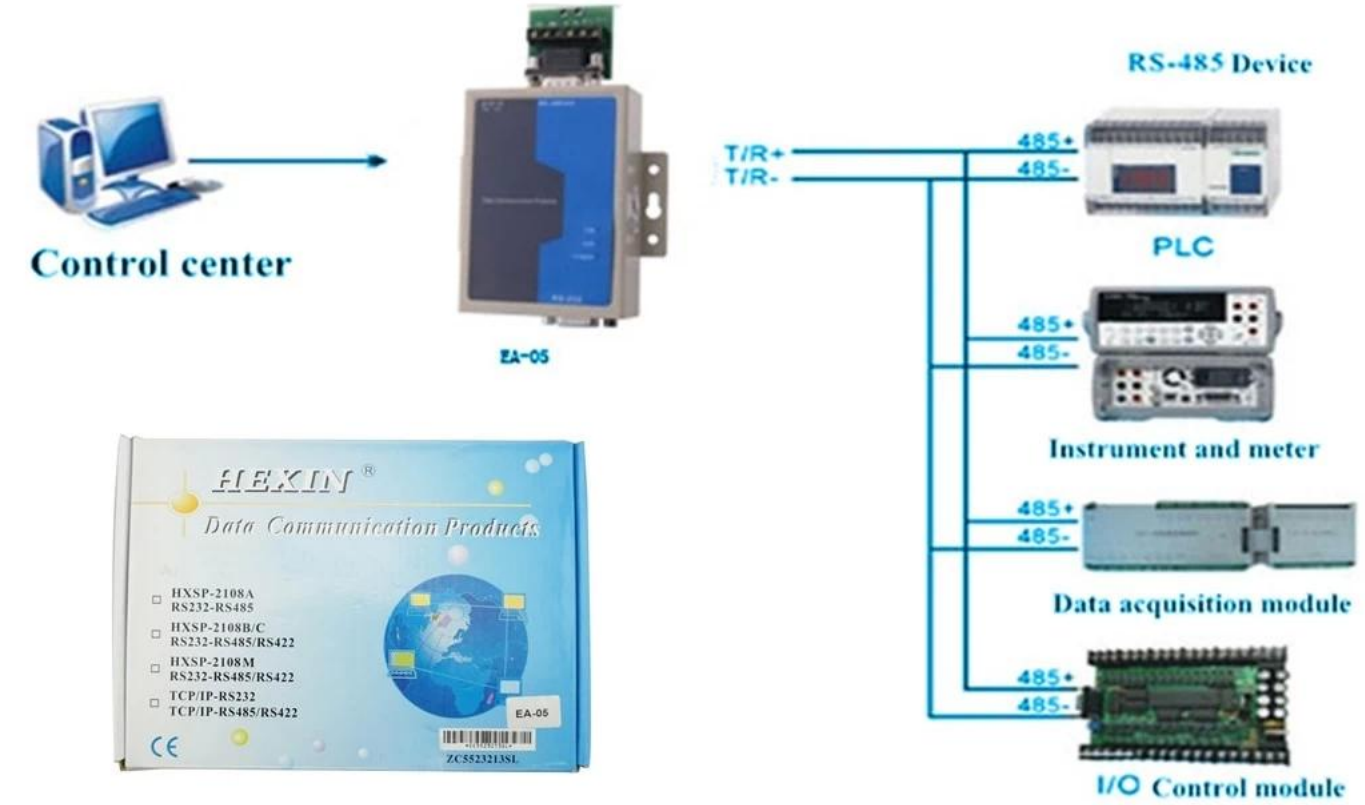

•Packaging & shipping

SMQT

□□□□□□□□ □□□□□□□ □□□□□	
□□□□□□ □□□	□□□□□ □□□□□□ □□□□□□□ RS232 □□□ RS485 EA-05
□□□□□□	20 □□□□□□□ □□ □□□□ □□□□□□□ □□□□
□□□□□□ □□□□□ □□□	43 * 30 * 37 (□□)
□□□	14KG

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair