


Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA
 RS-232 interface, DB9(holes)
 RS-422/RS-485 interface,DB9(pin) with 6 terminals
 300-115.2kbps transmission speed
 Twisted-pair cables as transmission medium
 With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning
 strike and surge power of each line.
 3500VRMS isolation
 500VDC isolation voltage



Parameter

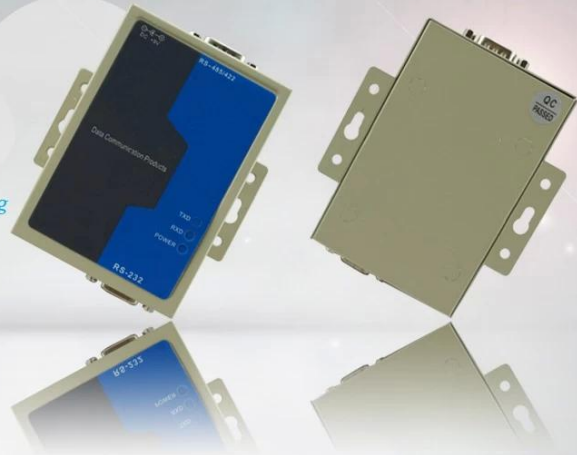

产品型号	RS232 转 RS485 转换器
产品型号	EA-05
尺寸	90L * 65W * 25.5H (mm)
接口类型	9 针 D 型接口
接口标准	符合 EIA / TIA RS-232C / RS-485 / RS-422 标准
接口描述	RS-232C 接口 DB9 母头，RS-422 / RS-485 接口 DB9 公头
接口信号	TXD RXD 信号
接口速率	300-115.2KBPS
接口保护	RS-232 15 \pm KVESD，RS-422 / RS-485 600W 浪涌保护
接口电压	3500VRMS
接口温度	5 \sim 95 $^{\circ}\text{C}$
接口湿度	0 $^{\circ}\text{C}$ \sim 50 $^{\circ}\text{C}$
接口重量	0.62KG

In-kind shooting





• Feature

SMQT

EA-05



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

Application

SMQT

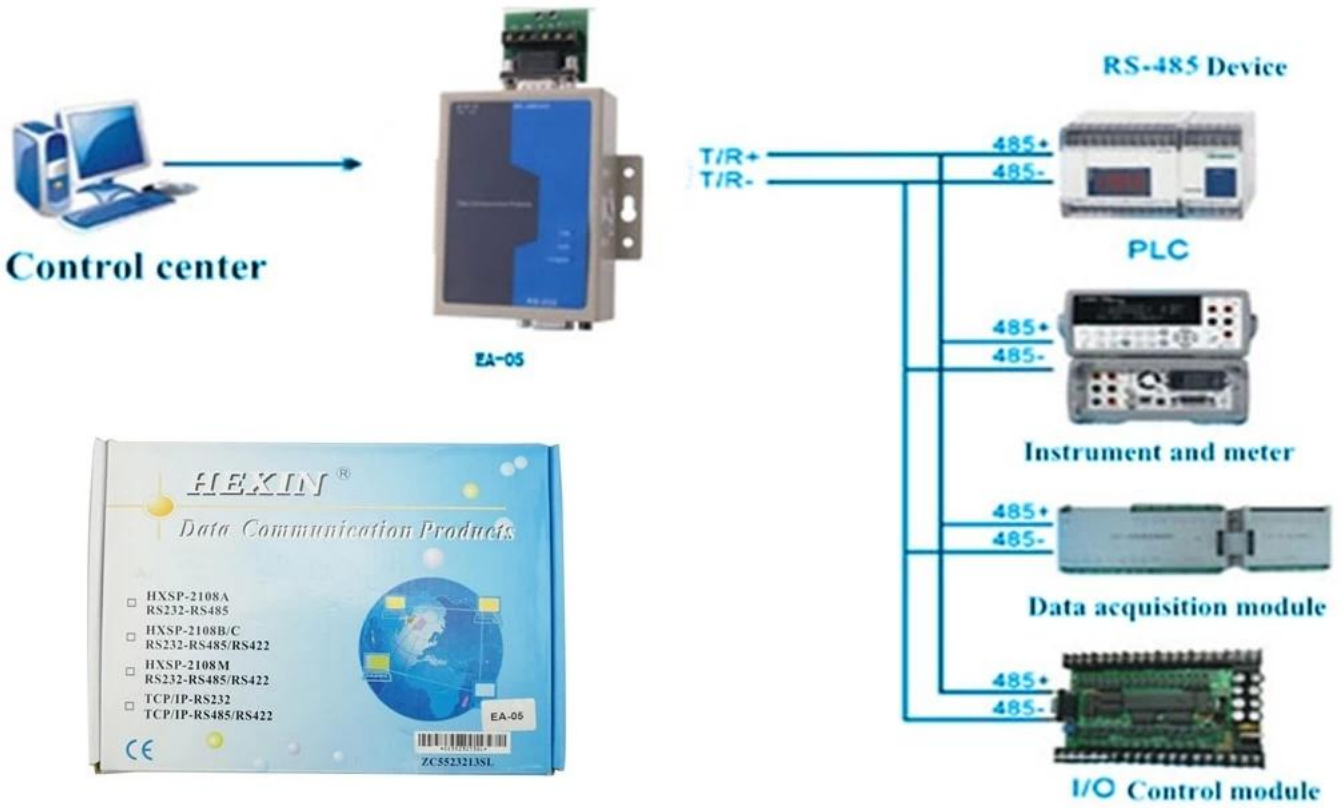

Packaging & shipping

SMQT

	□□□□□□ □□□□□□ □□□□□
□□□□□ □□□	□□□□□ □□□□□ □□□□□□ RS232 □□□ RS485 EA-05
□□□□□□	20 □□□□□□ □□ □□□□ □□□□□□ □□□□
□□□□□□ □□□□□ □□□	43 * 30 * 37 (□□)
□□□	14KG



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair