

● Parameter

SMQT

Case Size	205L * 165W * 74H (mm)
Output Voltage	DC12V
Output Current	3A
Timeout	0-15s
Output Protection	Overload, short circuit, and overtemperature protection
Control Mode	Manual/Timer
Control	Normally open, normally closed, and self-locking
Control Voltage	80V AC (for normally open, normally closed, and self-locking)
Power Source	12V 7AH

● Introduction

SMQT

12V 3A DC power supply unit with a timer function. It is suitable for various electronic devices that require a 12V DC power source. The unit is compact and easy to use, making it a popular choice for hobbyists and professionals alike.

The unit features a timer function that allows you to set the output voltage to zero for a specific duration. This is useful for testing and debugging circuits without the need for a separate power source. The timer is controlled via a push-button and can be set to 0-15 seconds. The unit also includes a reset button and a power switch for easy operation.

The unit is housed in a sturdy metal case and is designed for reliable performance. It is compatible with standard 12V 7AH batteries and can be used in a variety of applications. The unit is easy to install and use, making it a great choice for anyone looking for a reliable power source.

The unit is available in two versions: one with a normally open (NO) timer and one with a normally closed (NC) timer. The NC version is ideal for applications where you want the output to be zero when the power is turned on. The NO version is ideal for applications where you want the output to be zero when the timer is set.

● Dimesion Picture

SMQT




● Installations

SMQT



● Features

SMQT

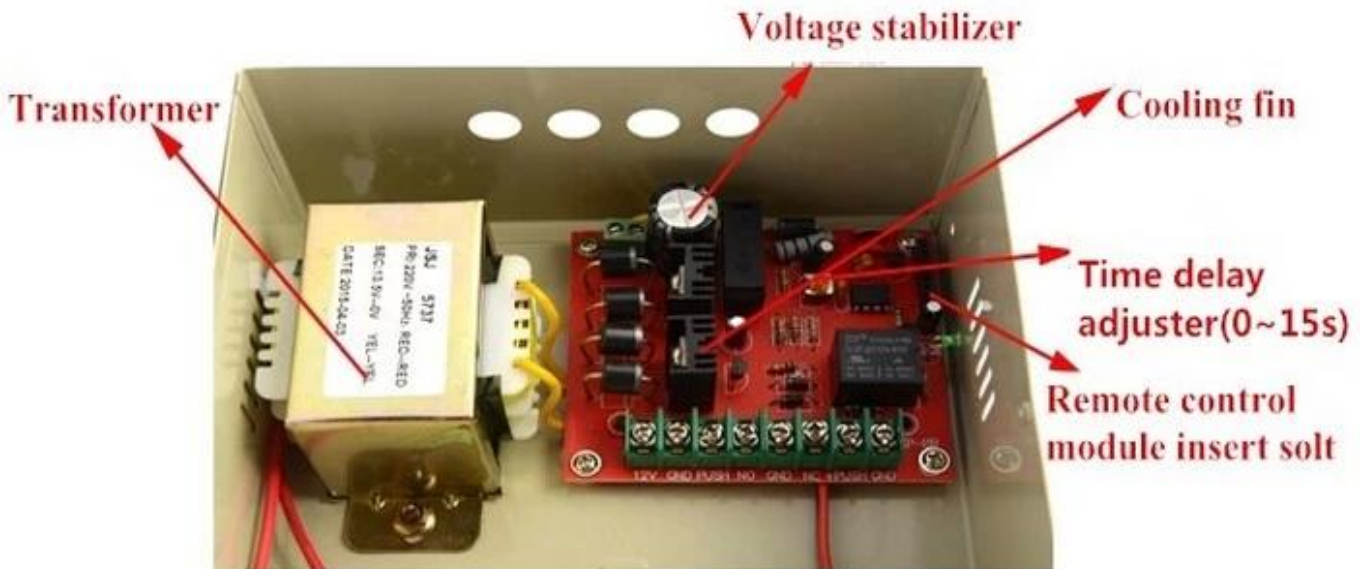

● Packing list

SMQT



□□□□□□	10 / □□□□
□□□□□□□□ □□□□□□	50L * 41W * 26H (□□)
□□□□□ □□□□□□□	25KG

● Office



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair