

● Parameter

SMOT®

基本仕様	
製品名	環境監視器 標準型
型番	EB-117
動作温度範囲	-10 °C ~ + 50 °C
湿度範囲	0.65 ~ 15.5% FT
湿度精度	10 90 %RH
電源電圧	DC12 / DC9V
出力信号	NC / NO
設置方法	壁掛
設置場所	屋内・屋外
設置寸法	Φ104 * 51 (mm)

● Introduction



SMOT®

- [illegible]

Dimension Picture

SMOT®



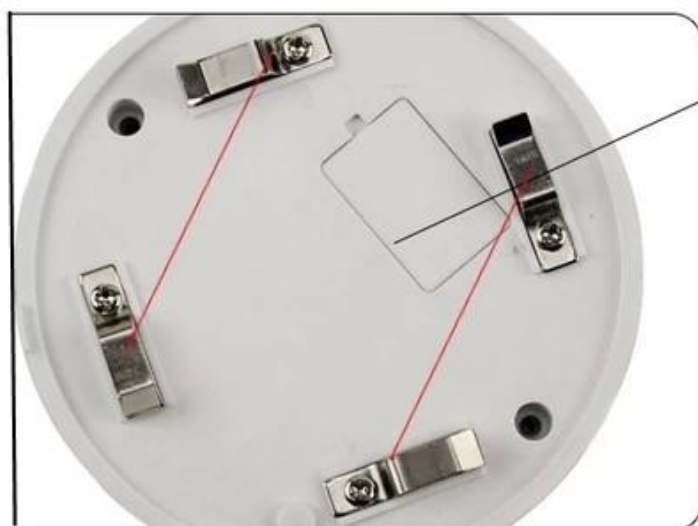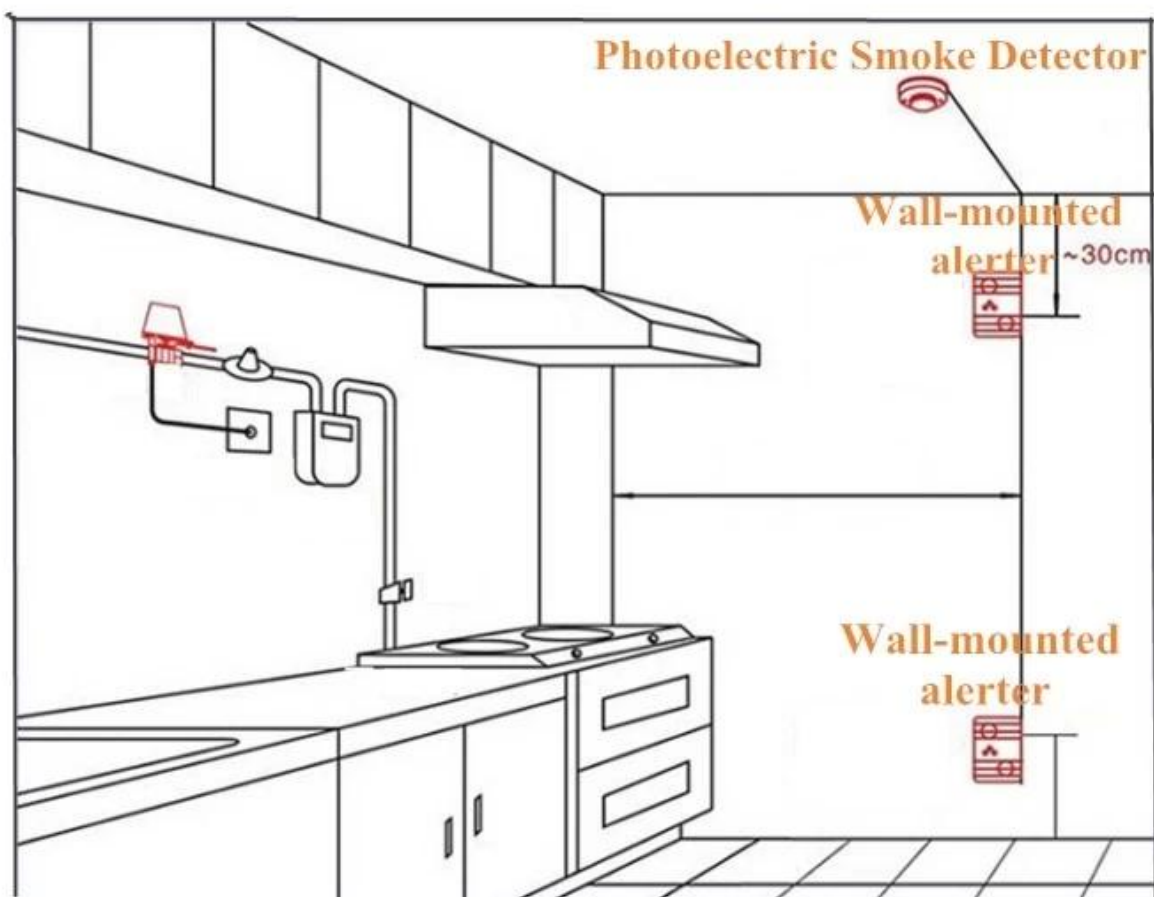

Base plate

1-2 interface for DC power
2-4 interface for relay output



Stability

Adopt SMT process manufacturing, dust, insects, white light interference, intelligent logic control, LED indicator alarm, filter out all sorts of false positives, stable and reliable.

ABS fireproof shell

Concise and beautiful, heat-resisting do not short circuit.



Metal shield

No radio frequency interference, filter out false positives.

Infrared photoelectric sensor

High sensitivity



LED indicator light

Every 9 seconds flicker, during normal working normally on alarm condition, energy conservation and environmental protection.

Adjusting device

The factory has been set up, please don't move easily.



● Packing list

SMQT®

□□□□□□□□ □□□□□□ □□□□□	
□□□□□□ □□□	□□□□□□□□□□ □□□□□□ □□□□□
□□□□□□□	108 / □□□□□
□□□□□□□□□□ □□□□□□□□	56 * 47 * 35 (□□)
□□□□□□ □□□□□□□□	25KG



● Office

SMQT®



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

