

● Parameter


SMQT

参数	
额定功率	额定功率/额定电压
外形尺寸	Φ10 * 18.5 (mm)
重量	重量/长度
工作温度	20 ± 5 (°C)
额定电压	≤100VDC
额定电流	≤500mA
额定功率	≤10W
额定电压	额定电压/额定功率
重量	重量/长度
额定功率	额定功率/额定电压
额定功率	8

● Dimension Picture

SMQT

2 Color optional

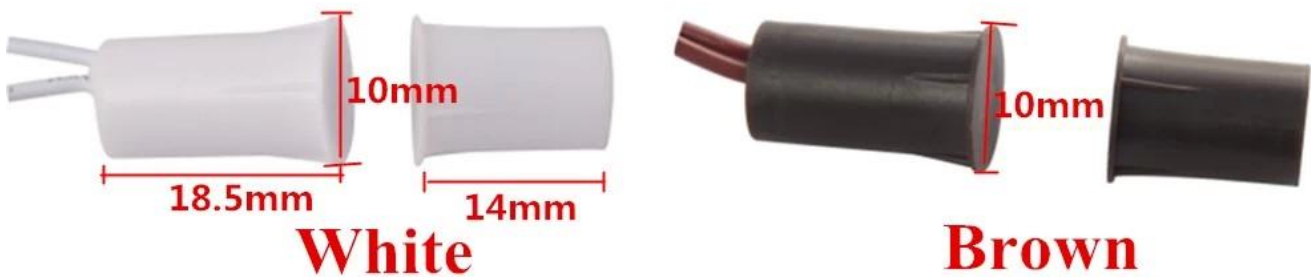


● Installations

SMQT



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

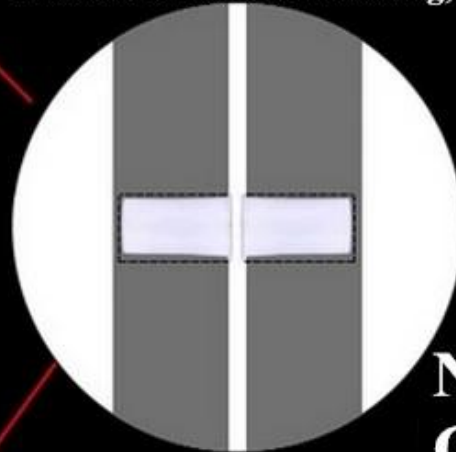

Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

● Features

SMQT

1. 该系列门窗采用优质铝合金型材，强度高，耐腐蚀，使用寿命长。且具有良好的隔热、隔音、防尘、防风性能。
2. 该系列门窗采用优质玻璃，透光率高，视野开阔。且具有良好的隔热、隔音、防尘、防风性能。
3. 该系列门窗采用优质五金配件，操作方便，使用寿命长。且具有良好的隔热、隔音、防尘、防风性能。



Suitable for:
 Suitable for home anti-theft



Door
Magnetic Contact
 safe door happy life

(Notice:need match the home alarm system to

● Packing list



	□□□□□□ □□□□□□ □□□□□□□□□□
□□□□□□	2000/□□□□
□□□□□□□□ □□□	37.5 29.5 * □W * 20 □□) □
□□□□□□□□ □□□	20.94 □□□





● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....