

## • Parameter

SMQT®

產品名稱	SMQT 車載音響系統
產品型號	EB-166
適用車種	ABS 系統
工作電壓	DC12V
最大輸出功率	30W
工作頻率	80HZ ~ 15KHZ
SNR	≥82db
信噪比	120DB
工作溫度	-10 °C ~ 65 °C
尺寸	40×95 mm

## • Introduction

SMQT®




□□□□□□ □□ □□□□□□□□ □□□□□□ 120 □□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□□

□□□□□ □□□□□□ □□□□□□ □□□□ □□□□□ □□ □□□□□□ □□□□□□  
□□ □□□□□□□□ □□□□□ □□□ □□□□ □□□□□□□ □□□□□□□□ □□□□□□□ □□□  
□□□□□□ □□□□□.

• *Dimension*

SMQT®

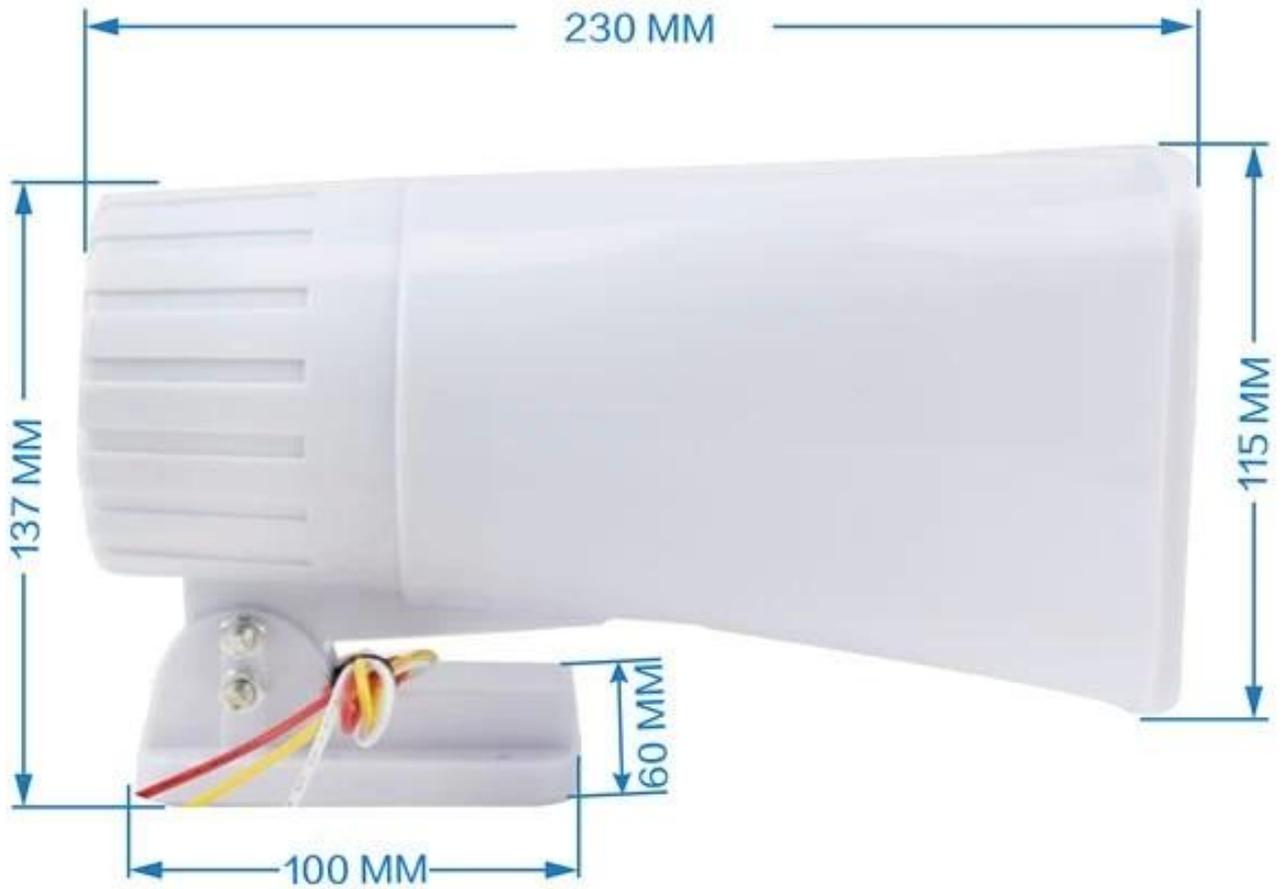

• *Feature*

SMQT®



1

## *ABS shell*

ABS engineering plastics

Adopt ABS material production, good pressure resistance, corrosion resistance, can be used in harsh environment such as toxic, long life not aging.

2

## *Sounds loud*

Alarm sounds great

NV0EOS phonetic chip is applied to make speech processing core, with the stability of the industrial performance. Alarm sounds great, is not afraid of other people can't hear you.



3

## *Flexible stent*

Rotating stents

Can be fixed on the ground, also can be fixed on the wall, can rotate 90 degrees to use, convenient installation.



4

## *Well-adapted*

Wide applicability

Suitable for oil field, high pressure, the mine, toxic sites, car, airport QuDiao, etc.







## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....