

Model	SMOT EB-183
Dimensions (mm)	40 * 59 * 107
Dimensions (mm)	Φ106x36
Operating Voltage	DC12V
Number of Channels	18 Channels
Channel Spacing	Φ8m
Rotation Angle	360 °
Output Type	NO / NC
Output Signal	Open Collector
Response Time	2.2M-3.6M
Material	ABS
Control Mode	ON / OFF

1-12v 12V DC power supply

2-Size 40 * 59 * 107 mm

3-ABS sensor

4-Channel



5-OEM

6.used in ABS system

12V DC power supply


12V DC power supply

Detecting Area View

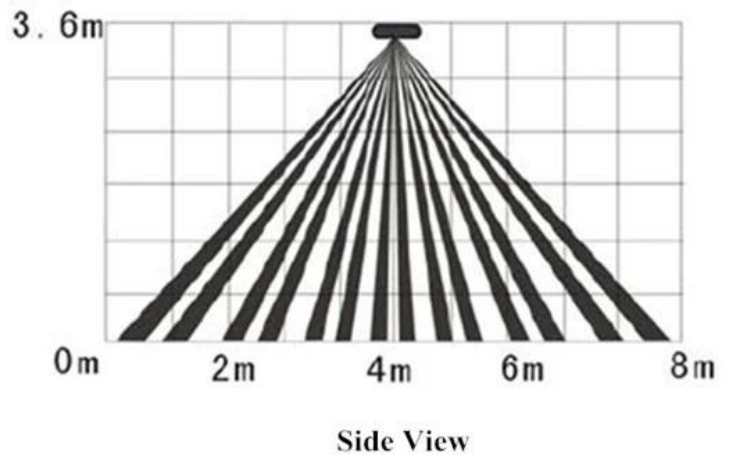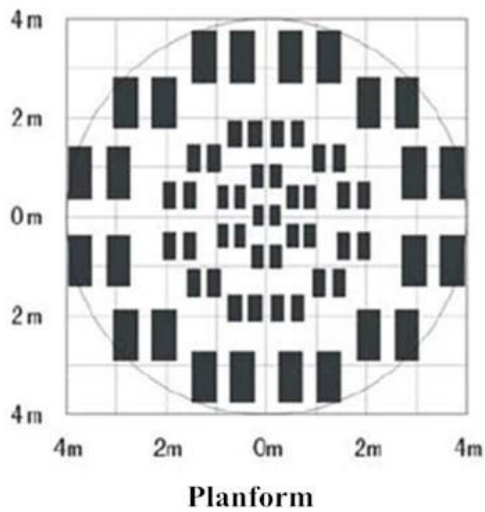

● Dimesion Picture

SMOT

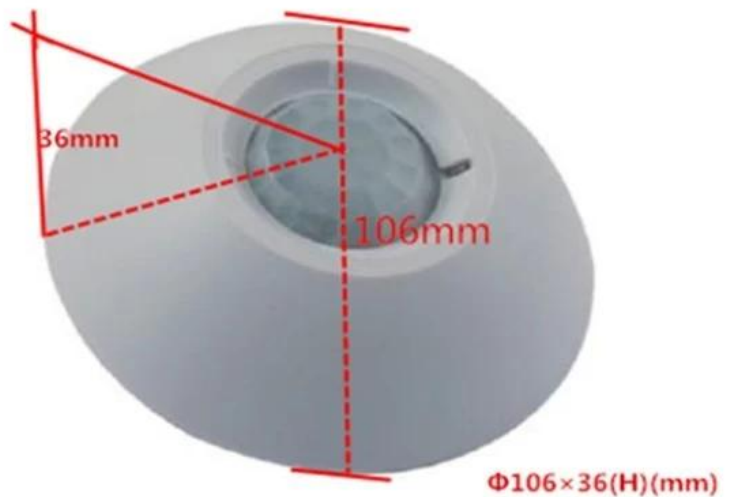

● Installations

SMOT




● Features

SMQT

1. 系統採用 高 級 警 報 器 材 質 堅 固 耐 用 且 具 有 超 高 級 警 報 音 效 且 具 有 超 高 級 警 報 音 效 . 且 具 有 超 高 級 警 報 音 效 .
 2. 系統採用 高 級 警 報 器 材 質 堅 固 耐 用 且 具 有 超 高 級 警 報 音 效 且 具 有 超 高 級 警 報 音 效 . 且 具 有 超 高 級 警 報 音 效 .
- 系統採用 高 級 警 報 器 材 質 堅 固 耐 用 且 具 有 超 高 級 警 報 音 效 且 具 有 超 高 級 警 報 音 效 . 且 具 有 超 高 級 警 報 音 效 .



inside picture of detector

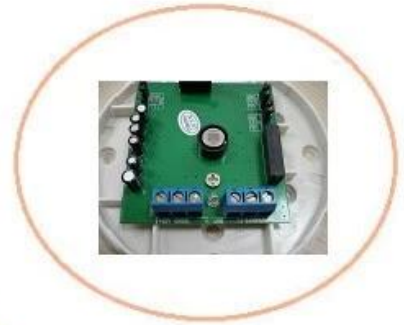

wired connect PCB



Tamper on PCB



ceiling mounted sensor

● Office

SMQT



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair