

12 〇〇〇〇〇〇 〇〇〇〇〇〇 〇〇〇〇〇〇 〇〇 〇〇〇〇〇 〇〇〇〇 〇〇〇〇〇〇〇^V 〇〇〇〇〇〇 〇〇〇〇〇



□□□□□□ □□□□□□ **EB-184**

設定項目	
電圧	12 電圧調整 電圧調整範囲 電圧 電圧調整 電圧 電圧調整V 電圧調整 電圧調整
電圧調整	EB-183
電圧調整	電圧 36 * 106 電圧
電圧調整範囲 電圧	DC12 ± 3V
電圧調整範囲 電圧調整	12mA
電圧調整範囲 電圧調整	360 °
電圧調整範囲 電圧調整	NC
電圧調整範囲 電圧	電圧調整範囲 電圧 電圧調整
電圧調整範囲 電圧調整	電圧 3.6 ~ 電圧 2.2 電圧調整
電圧調整	ON / OFF (電圧調整範囲)

□□□□) □□□□□□□ □□□□□□□: EB-184)

1. 00 0000 0 00000000 00000000 0000 0000 00 0 000000 00000000 000000 0000000000
000000 0000000000.


- 2. 1. 2. 3. 4. 5.
- 3. 1. 2. 3. 4. 5.
- 4. 1. 2. 3. 4. 5.
- 5. 1. 2. 3. 4. 5.

EA-184

Size





PCB board display

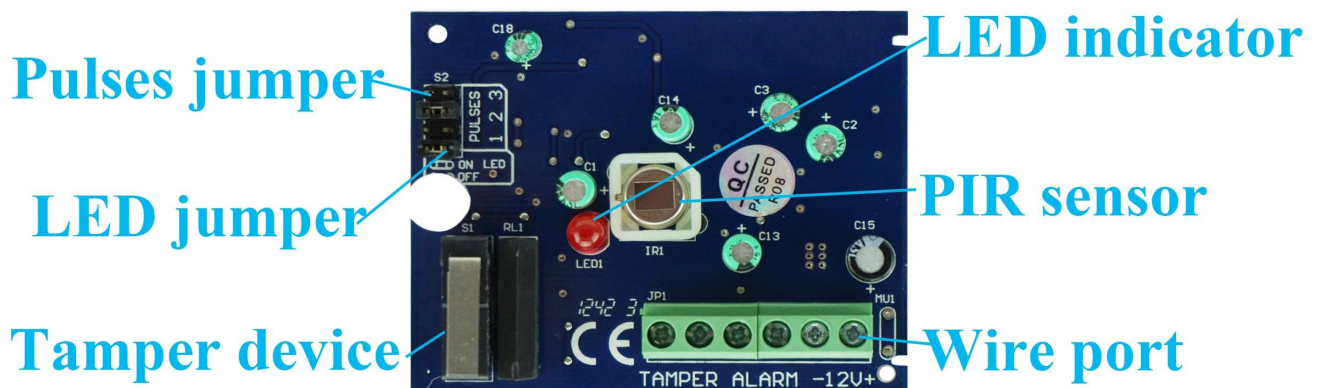

Detecting area specification

Detection distance diagram:

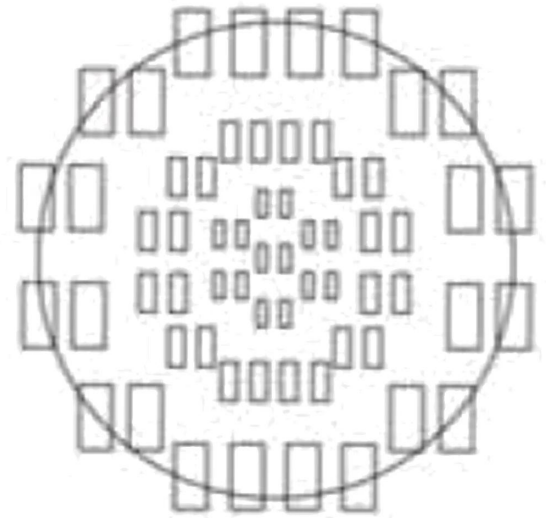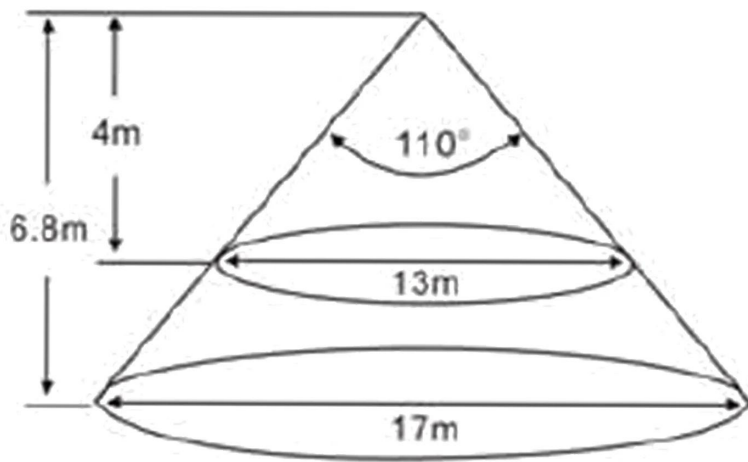

□□□□ □□□□ □□ □□□□

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

