

## •Parameter

SMQT®

|      |                                                     |
|------|-----------------------------------------------------|
| 製品名  | SMQT 製品名                                            |
| 型番   | EA-21A / EA-21B                                     |
| 寸法   | EA-21A: 85 × 52 × 25 (mm) EA-21B: 86 × 86 × 39 (mm) |
| 動作電圧 | 12V DC                                              |
| 動作電流 | 100mA & lt115 mA °                                  |
| 動作電圧 | 100V & lt4 W                                        |
| 動作電圧 | 10 ~ 20 W                                           |
| 動作電圧 | NO / NC / COM                                       |
| 動作電圧 | 500000 動作電圧                                         |
| 動作電圧 | 動作電圧                                                |
| 動作電圧 | 動作電圧 / 動作電圧                                         |
| 動作電圧 | 動作電圧 動作電圧 動作電圧 動作電圧                                 |
| 動作電圧 | 0 ~ 95%                                             |
| 動作電圧 | -20 °C -50 °C                                       |
| 動作電圧 | EA-21A: 0.046kg EA-21B: 0.106kg                     |

## •Introduction

SMQT®



00000000 00 0000 0000 0000 000000 00000000 00 00000000 00 00000000 000000

□□□□□□ □□□□□□ □□□□□□□□ □□□□□□ □□□ □□□□□□ □□□□□ □□.



*EA-21A*



*EA-21B*



No touch infrared induction door release button

500000 times mechanical test


LED back light indication

Stainless steel panel,wire drawing finished

Welcome OEM&ODM

## • Installation

SMQT®

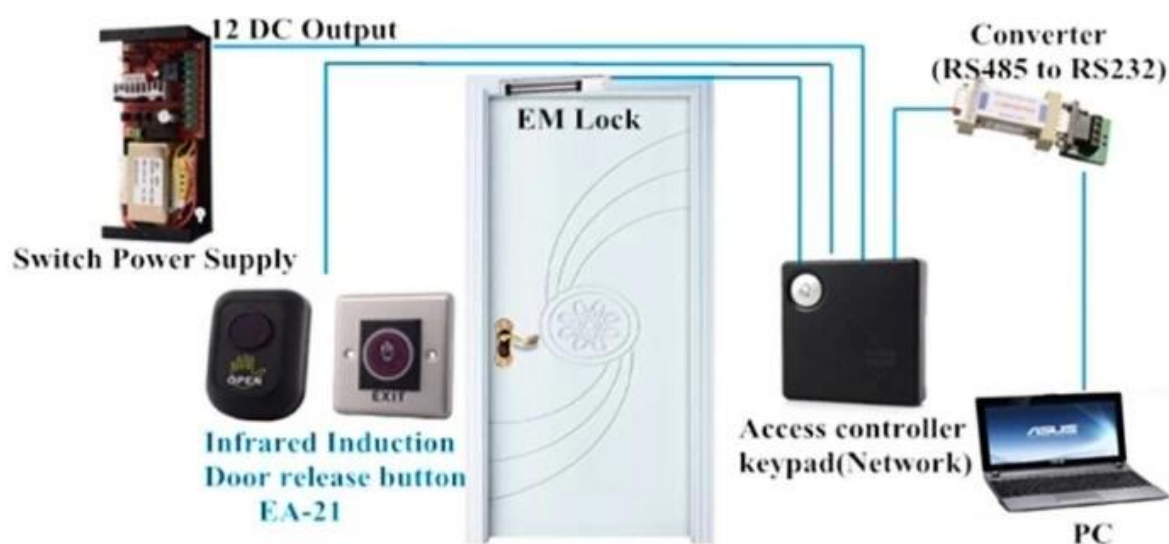

## • Packaging & shipping

SMQT®





## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

