• Parameter

SMQT

□□□□□	
□□□□□□ □□□	□□□□□ □□□□□□□ □□ □□□□□□□ □□□ □□□□□□ □□□□
□□□□□	EA-21A / EA-21B
□□□	EA-21A: 85 × 52 × 25 (□□□) EA-21B: 86 × 86 × 39 (□□□)
□□□□□ □□□□□□	12V □□□□□□□
□□□□□ □□□□	□□□□□□□ & lt115 □ °
□□□□□□ □□□□	□□□□□□□ & lt4 □W
□□□□□□□□ □□□□	10 ~ 20 □□
□□□□□□□ □□□□□□	NO / NC / COM
□□□□□□□□ □□□□□□□□□	500□000 □□□□□□ □□□□
□□□□□□ □□□□□□	□□□□□□ □□ □□□□□□ □□□□
□□□□□	□□□□ / □□□□□
□□□□□□□	sysetm □□□□□□□ □□□□□ □□□□□□ □□ □□□□□□
□□□□□□□ □□□□□□□	0 ~ 95□
□□□□□□□□□□ □□□□	-20 ℃ -50 ℃
□□□□□□ □□□□□	EA-21A: 0.046kg EA-21B: 0.106kg

In-kind shooting

EA-21A *EA-21B*

No touch infrared induction door release button

500000 times mechanical test

LED back light indication

Stainless steel panel,wire drawing finished

Welcome OEM&ODM

Application

SMQT

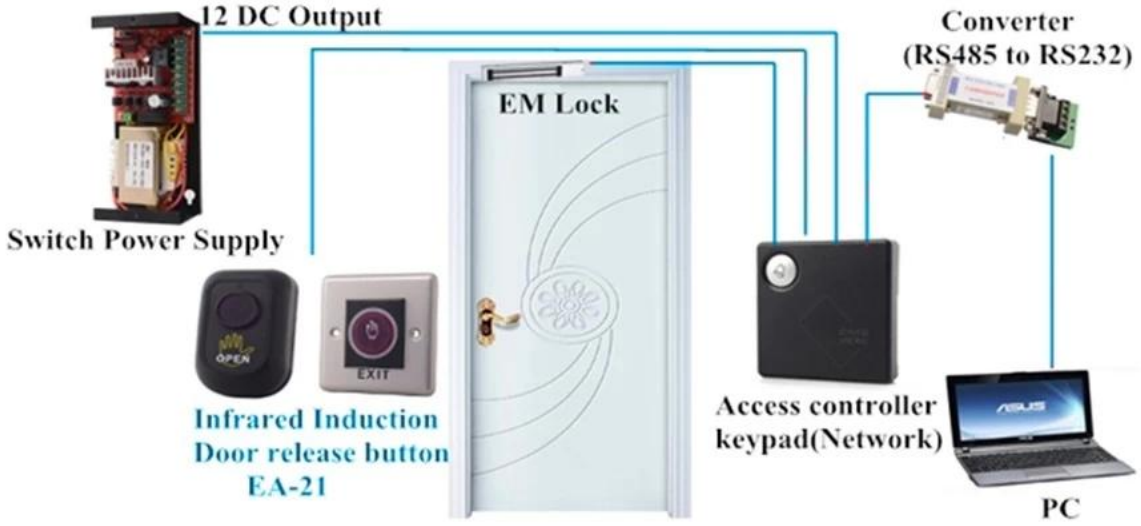

Packaging & shipping

SMQT

□□□□□□□□ □□□□□□□ □□□□□	
□□□□□□ □□□	EA-21 □□□□□ □□□□□□□ □□ □□□□□□□ □□□ □□□□□□ □□□□
□□□□□□	100 □□□□□□□ □□ □□□□ □□□□□□□ □□□□
□□□□□□ □□□□□ □□□	37 * 30 * 29 (□□)
□□□	12kg □

Office show

SMQT

Exhibition

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair