

Touch door release button

LED light indication

Touch iduction

Plexiglass panel

2 sizes optional

500000 times mechanical test.

SMQT



• Parameter

SMQT

| | |
|------|--|
| 品名 | SMQT 触摸门释放按钮 |
| 型号 | EA-20 |
| 规格 | 规格 A: 86 × 56 × 25 (mm) (规格 B: 86 × 86 × 25) |
| 额定电压 | 12V 直流电压 |
| 额定电流 | 100mA |
| 使用寿命 | 500,000 次机械测试 |
| 安装方式 | 表面安装 |
| 材质 | ABS 塑料外壳 钢化玻璃面板 |
| 认证 | system 认证 符合 CE 标准 |
| 工作温度 | 0 ~ 95℃ |
| 存储温度 | -20℃ -50℃ |
| 重量 | 规格 A: 0.06KG 规格 B: 0.09KG |

• Introduction

SMQT





EA-20A




EA-20B

1 Superior Design

Touch push button design simple and beautiful, Panel using organic glass materials, touch induction to open the door, button USES the interactive design of light touch response. Internal using PC rubber production, high temperature resistant do not fade

Resistance to heat shock Organic glass touch responsive

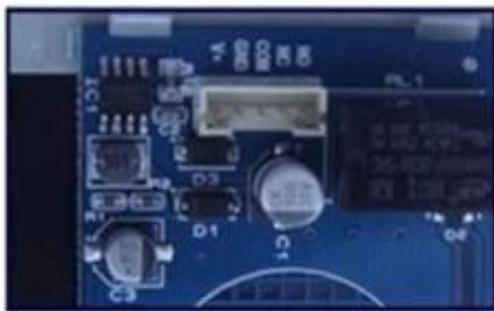

2 Product components

500,000 times test qualified, the relay switch power output, (NO NC COM)3 lines button suitable for all Access control system

NO NC COM, 3 lines

3 Strong stability

Waterproof and dustproof more durable and strong, resistance to high temperature shock do not fade.

Waterproof and Dustproof Stable solid long life



Application

SMQT



Switch Power Supply



Touch Induction Door Release button EA-20

Single Door Access control Keypad

Packaging & shipping

SMQT

| | |
|-------------------|---|
| | □□□□□□□□ □□□□□□ □□□□□□ |
| □□□□□□ □□□ | EA-20 □□□□□ □□□□□ □□□□□□□□ □□ □□□□□□ □□□□□□□□ |
| □□□□□□□ | 100 □□□□□□□□ □□ □□□□ □□□□□□□□ □□□□ |
| □□□□□□□ □□□□□ □□□ | 37 * 30 * 29 (□□) |
| □□□ | 12kg □ |



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair