

# Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wieght: A:210g B:280g C:290g



## Parameter

SMQT

型號	EB-137A / B
尺寸	106L * 38W * 10H (mm)
重量	254g 154 / 290g
工作電壓	≤100VDC
最大電流	≤500mA
工作功率	≤10W
材料	Alloy-zn and alloy-al
安裝距離	60 ± 10 (mm)
安裝方式	螺絲安裝 / 粘貼
輸出信號	NO/NC
工作溫度	-20℃ ~ 70℃
工作濕度	≤95%RH
壽命	≥100,000次
包裝	254g 154 / 290g

## Introduction

SMQT

SMQT magnetic contact sensor is a non-destructive, non-contact, and non-invasive detector for commercial and industrial applications. It is suitable for detecting the opening and closing of doors, windows, and shutters. The sensor is made of alloy-zn and alloy-al material, which is durable and reliable. It has a long service life and low power consumption. The sensor is easy to install and use. It is suitable for various environments and applications.

# PRODUCT PICTURE



• *Feature*


**SMQT**

# PRODUCT FEATURE

EB-137A

EB-137B

EB-137C

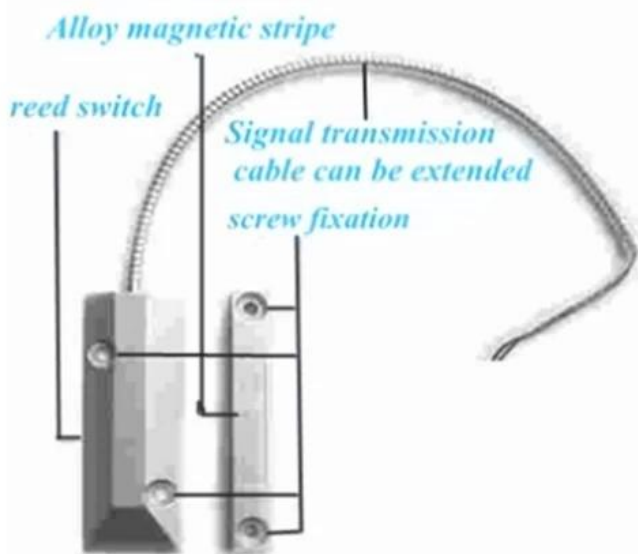



## • Packaging & shipping

SMQT®



## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....