

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance


MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

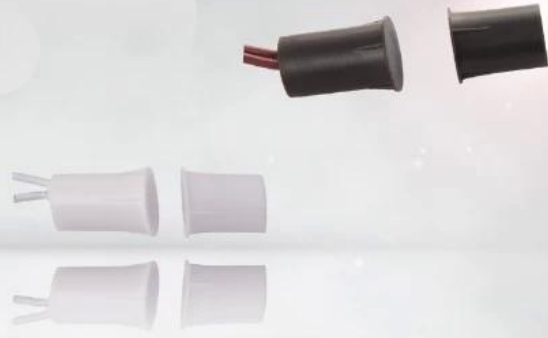

• Parameter

SMQT®

型號	EB-135
尺寸	Φ10 × 18.5 (mm)
開關類型	NO / NC (可選)
間隙	20 ± 5 (mm)
最大電壓	≤100V DC
最大電流	≤500mA
最大功率	≤10W
材料	ABS (防火) / 白色 / 棕色
重量	8G
工作溫度	-10 °C ~ 50 °C
適用場景	木門 / 木窗

• Introduction

SMQT®

此磁接觸開關採用ABS防火材料製成，具有優良的防火性能。適用於木門、木窗等場景，安裝簡便，使用壽命長。其工作溫度範圍為-10°C至50°C，最大電壓為100V DC，最大電流為500mA。開關類型可選NO（常開）或NC（常閉）。

PRODUCT PICTURE



PRODUCT FEATURE



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to)



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.




Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

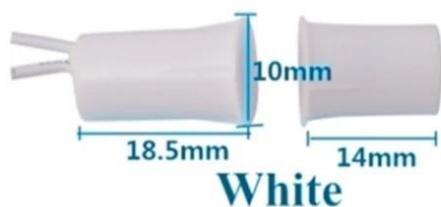





● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....