

# Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance


MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

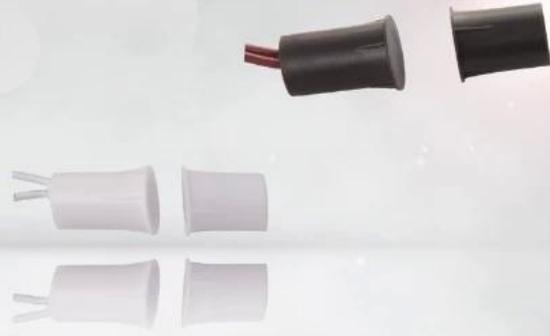

## • Parameter

SMQT®

|      |                    |
|------|--------------------|
| 型號   | EB-135             |
| 規格   | Φ10 × 18.5 (mm)    |
| 開關類型 | NO / NC (可選)       |
| 間隙   | 20 ± 5 (mm)        |
| 最大電壓 | ≤100V DC           |
| 最大電流 | ≤500mA             |
| 最大功率 | ≤10W               |
| 材料   | ABS (防火) / 白色 / 棕色 |
| 重量   | 8G                 |
| 工作溫度 | -10 °C ~ 50 °C     |
| 適用場景 | 木門 / 木窗            |

## • Introduction

SMQT®

此磁接觸開關適用於木門、木窗等場所，安裝簡便，使用壽命長，是家庭、商業場所的理想選擇。

# PRODUCT PICTURE





# PRODUCT FEATURE



## Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to)



### Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

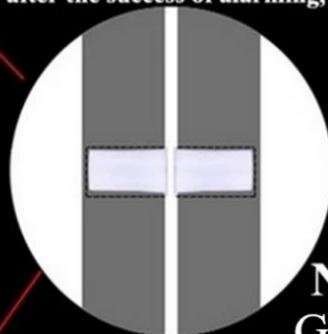


Notice:  
Gap < 2cm



### Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

## 2 Color optional

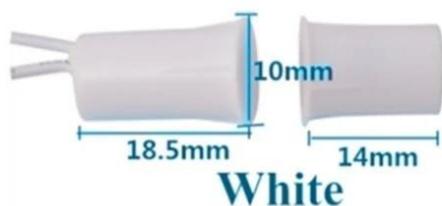





## ● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....