




تخصيص	
اسم المنتج:	مستقل كاشف الدخان، لاسلكي الدخان الاستشعار، إنذار الدخان
بحجم:	Ø106mm * 59MM
طاقة كهربائية شغالة:	البطارية 9V 6F22
الاستعداد الحالية:	≤15uA
إنذار الحالي:	≤56mA
البطارية الحياة العملية:	أقل من 1 سنة
مؤشر الطاقة:	إد ليد R
مؤشر الإنذار:	إد فلاش وميض R
ضغط الصوت:	85dB م / و
درجة حرارة العمل:	-10 ° C ~ 50 ° C
رطوبة العمل:	≤95% RH
مسافة الإرسال:	(لوت؛ 100 متر (مساحة مفتوحة &
تنفيذ المعيار:	EN14604
منطقة الكشف:	متر مربع عند ارتفاع التثبيت بين 6 إلى 12 مترا. 40 20. متر مربع عند ارتفاع التثبيت ضمن 6 أمتار.

□□□□□ □□□□□ □□□ □□□□ □

Standalone Gas detector

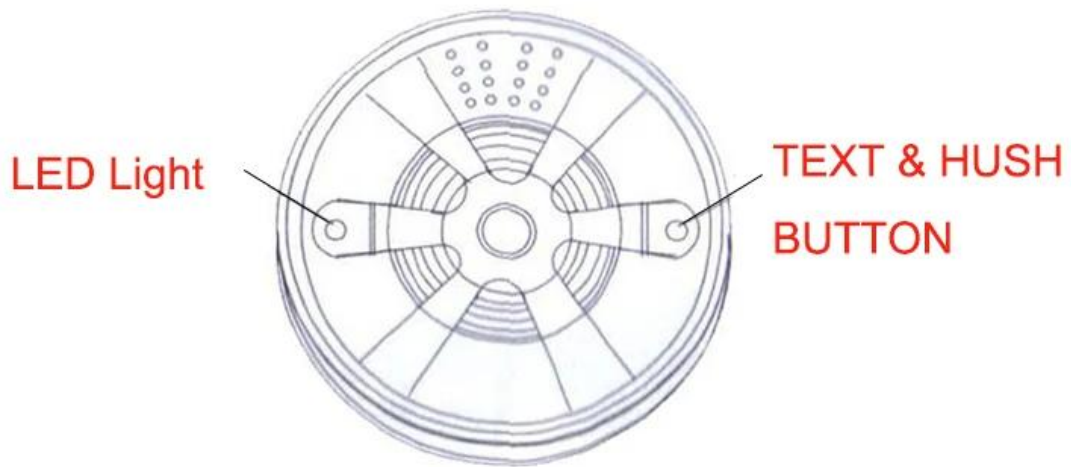

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

000000 0000-00



無線電波 無線電波



無線電波 無線電波



CUSTOMER



□□□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair





Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer