


TCP / IP 2-Wire Access Controller 2-Door 2-Relay 2-Relay 2-Relay 2-Relay

# Dual door access controller

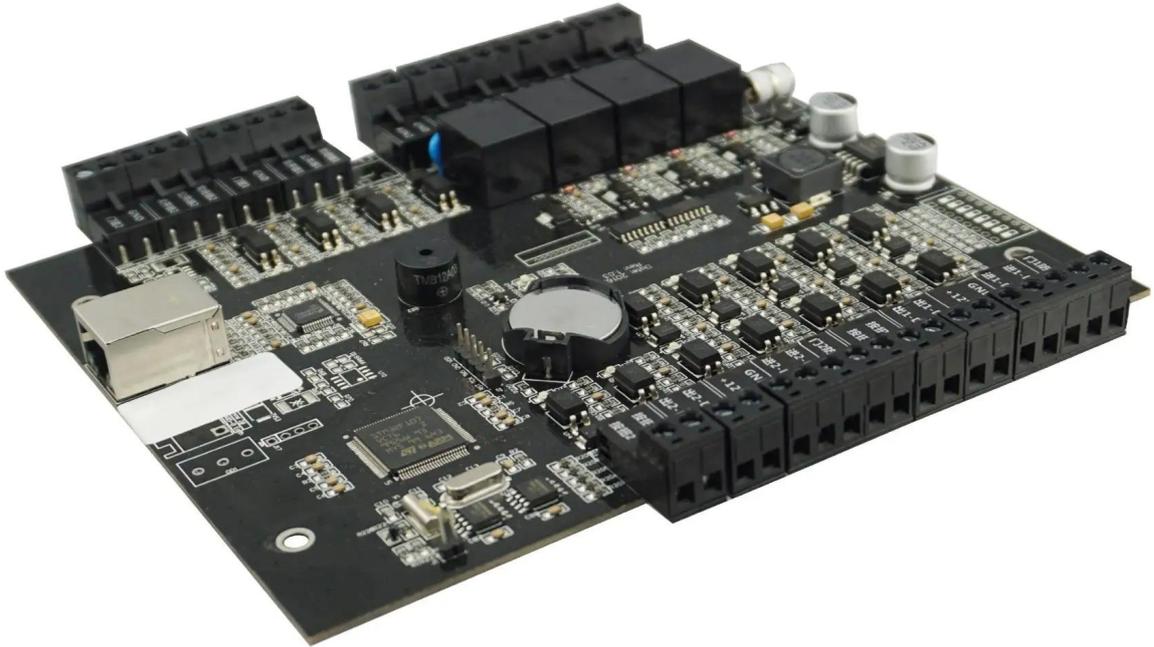

## EA-812'S MAIN SPECIFICATIONS

Access Method:	TCP / IP 2-Wire Access Controller 2-Door 2-Relay 2-Relay 2-Relay
Model:	EA-812
Power Supply:	9 ~ 14V DC
Current Consumption:	Access & It350 mA
Capacity:	20000 Access Points
Access Time:	100000 Access Points (Access Time: 100ms) (Access Time: 100ms) (Access Time: 100ms) (Access Time: 100ms)
Access Point:	Access Point: 4 × Access Point (WG26 or WG 34) 2 × Access Point 2 × Access Point 2 × Access Point 1 × Access Point RS485 × 1PCS (Access Point) TCP / IP × 1PCS
Access Method:	TCP / IP / Rs485 Access Point
Access Point:	Access Point Access Point
Size:	170 * 155 * 17mm
Access Point:	Access Point Access Point / Access Point Access Point / Access Point Access Point

品名:	磁石磁石 磁石
品番:	磁石
重量:	0.7KG
磁石の種類 磁石の種類:	磁石 磁石 磁石 磁石
数量:	2 磁石 磁石
OEM:	磁石磁石 磁石磁石 磁石 磁石

磁石磁石 磁石 EA-812












# Wire diagram

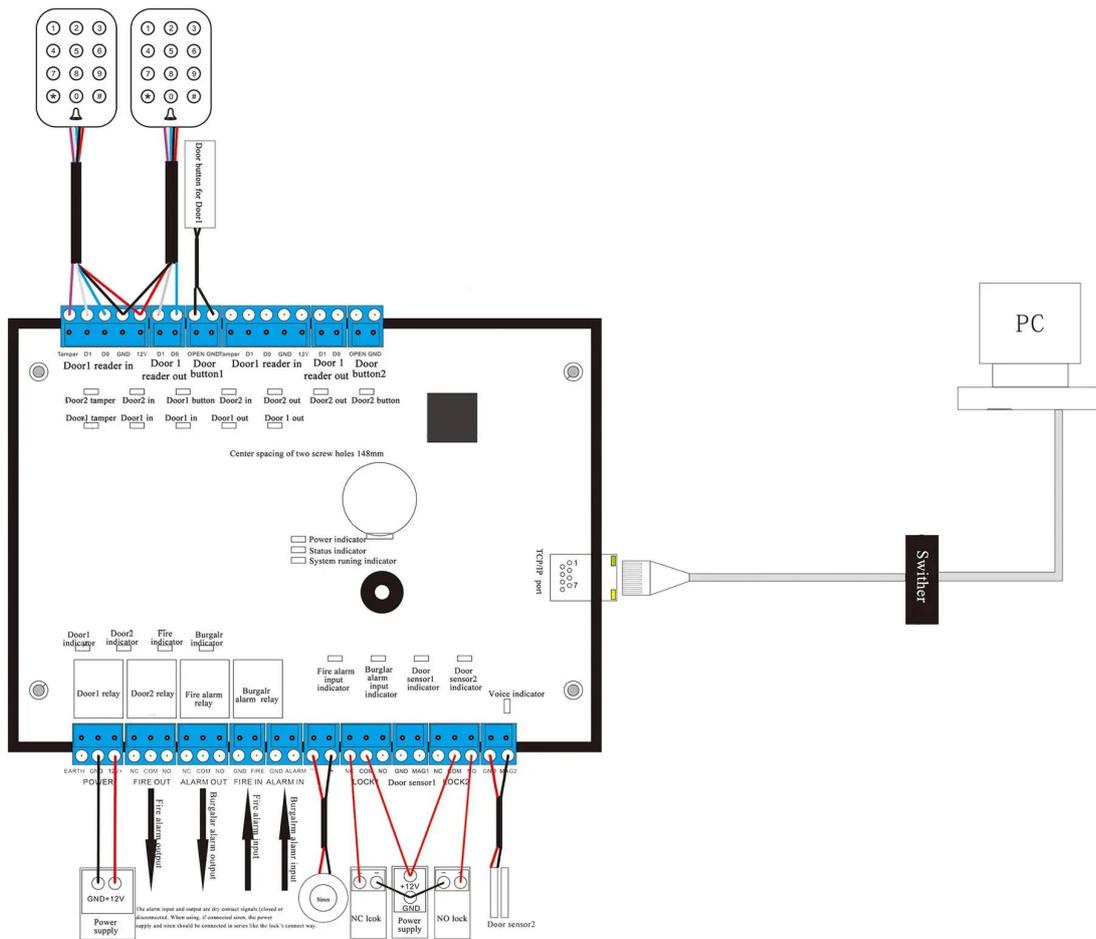

# PC software

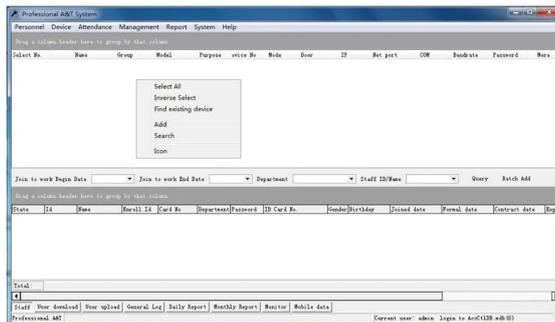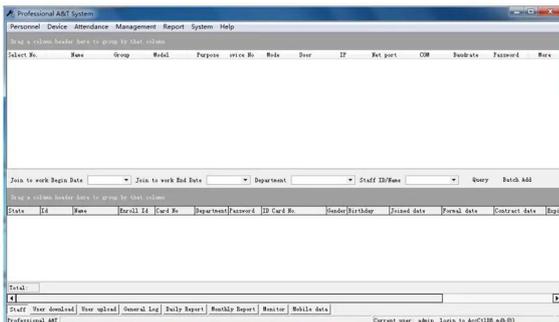


# Optional accessories



**Metal box power supply**

# Standard package

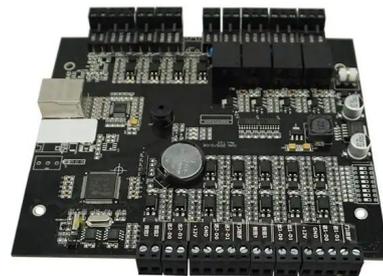

**Single package size: 248\*165\*30mm**

**The number of full boxes: 46**


**FCL weight: 15kg**

**FCL size: 470\*383\*420mm**

# *Welcome OEM*

□□□□ □□□□ □□ □□

**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技

