

Wired magnetic contact sensor

Fireproof ABS material shell


NO/NC model optional

Brown/white color optoinal

20±5(mm) gap distance

Suitable wooden door or window

14g weight

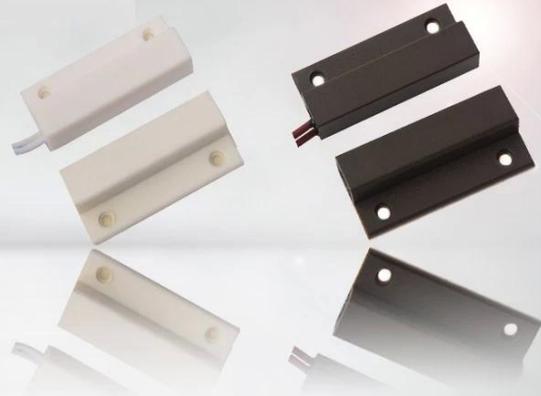

Parameter

SMQT

型号	EB-132
尺寸	34 × 41 × 6.5 (mm)
触点类型	NO / NC (可选)
间隙	20 ± 5 (mm)
额定电压	≤100V AC
额定电流	≤500mA
额定功率	≤10W
触点寿命	100,000 (NO) / 50,000 (NC)
安装方式	表面安装
应用	ABS 防盗报警系统
工作温度	-10 °C ~ 50 °C
重量	14G

In-kind shooting

SMQT



• *Feature*

SMQT



EB-132

Dimension:34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage≤100VDC,MAX current≤500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty,welcoem OEM

•Packaging & shipping

SMQT

磁簧开关 磁簧开关 磁簧开关	
磁簧开关 磁簧	EB-132 磁簧开关 磁簧开关 磁簧开关
磁簧开关	1600 磁簧开关 磁簧开关 磁簧开关 磁簧开关
磁簧开关 磁簧开关 磁簧	38 * 30 * 30 (mm)
磁簧	20 磁簧kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....